Electronic Engineering

Incorporating . . . ELECTRONICS, TELEVISION & SHORT WAVE WORLD

VOL. 22 No. 269 JULY, 1950 PRICE 2/-

'AVO' ELECTRONIC TESTMETER

D.C. Volts : 2.5 mV to 10,000V. (Max. Input Resistance 110 MΩ)
D.C. Current : 0.25 μA to 1 amp. (250 mV. drop on all ranges)
A.C. Volts : 0.1V. to 2,500V. R.M.S. up to 2 Mc/s. With diode probe external. 0.1V. to 250V. R.M.S. usable to 200 Mc/s.
A.C. Output Power : 5mW. to 5 watts in 6 different load resistances from 5 to 5,000 ohms.
Decibels : —10db. to + 20db. Zero level 50mW.
Capacitance : .0001 μF to 50μF.
Resistance : 0.2 ohm to 10 MΩ
Insulation : 0.1 MΩ to 1,000 MΩ.

Fully descriptive leaflet available on application:—

AN up-to-date example of current instrument practice, developed to meet the demand for an instrument of laboratory sensitivity built in a robust and portable form, for use in conjunction with electronic and other apparatus where it is imperative that the instrument should present a negligible loading factor upon the circuit under test.

The instrument consists basically of a balanced bridge voltmeter. It incorporates many unique features and a wide set of ranges so that in operation it is as simple to use as a normal multi-range testmeter.

The thermionic circuit gives delicate galvanometer sensitivity to a robust moving coil movement. The instrument is quickly set up for any of the tests to be undertaken, a single range selector switch automatically removing from the circuit any voltages and controls which are not required for the test in question.

The Instrument operates on A.C. mains supply, 100-130V. and 200-260V., 50/60 c/s.

AVO

Precision Testing Instruments

THE AUTOMATIC COIL WINDER & ELECTRICAL EQUIPMENT CO., LTD
WINDER HOUSE DOUGLAS STREET LONDON, S.W.1. TELEPHONE: VICtoria 3404-9

Room for a little 'un

A mass of resistances, wires and condensers — how do you squeeze a switch in there? We'll tell you. Use our Type B.T. switch. It has been specially designed for small spaces and simple switching. You'll find it a godsend. It's an even better switch too since it has had an overhaul in our Development Section. Here are some improvements we have made to it:

The contact blades are fixed in a new way. This makes them rigid all the time.

The drive spindle is positioned definitely in the wafer. This provides double bearing.

Steady contact resistance.

Improved insulation between contacts.

Positive contact.

Self-cleaning action.

All these help to make the Type B.T. an efficient and lasting switch. Why not try it?

WALTER SWITCHES—MADE FOR LIFE

Walter Instruments
LIMITED

GARTH ROAD, LOWER MORDEN, SURREY. Telephone: DERWENT 4421-2-3

CRC46

CLASSIFIED ANNOUNCEMENTS

The charge for these advertisements at the LINE RATE (if under 1" or 12 lines) is : Three lines or under 7/6, each additional line 2/6. (The line averages seven words.) Box number 2/- extra, except in the case of advertisements in "Situations Wanted," when it is added free of charge. At the INCH RATE (if over 1" or 12 lines) the charge is 30/- per inch, single column. Prospectuses and Company's Financial Reports £14 0s. 0d. per column. A remittance must accompany the advertisement. Replies to box numbers should be addressed to : Morgan Bros. (Publishers), Ltd., 28, Essex Street, Strand, London, W.C.2, and marked "Electronic Engineering." Advertisements must be received before the 14th of the month for insertion in the following issue.

OFFICIAL APPOINTMENTS

THE POLYTECHNIC, 309, Regent Street, W.1, Electrical Engineering Department. Applications are invited for the full-time post of lecturer and demonstrator in Telecommunications and Electronics. The appointment will date from 1st September, 1950. Candidates should be graduates with industrial and/or teaching experience. Salary in accordance with Burnham (Technical) Scale for London, with Degree and training allowances and increments for industrial and/or teaching experience where applicable, subject to the usual deduction for superannuation. Further particulars and application form, which should be returned within ten days of appearance of this advertisement, may be obtained by sending a stamped addressed foolscap envelope to the undersigned, J. C. Jones, Director of Education. W 2376

MINISTRY OF SUPPLY invites applications from Physicists and Electrical Engineers for following unestablished appointments in Scientific Officer Class at a Research and Development Establishment in the South Midlands. Principal Scientific Officers (A.170/50a) : (1) To lead a team in electronics research with special reference to micro-wave techniques ; (2) To lead a team engaged on development of fire control radar equipment. Considerable experience of either radar equipment servo mechanisms or of general electronics is essential. Candidates for these posts should be at least 31 years of age, possess an Honours Degree or equivalent in physics or electrical engineering and show evidence of a good record of individual research and development work and of administrative ability. Scientific Officers (2 posts) (A.171/50a). For research and development work on Army radar equipment. Candidates should have a good Honours Degree in physics or electrical engineering with an interest in electronics or microwave techniques. Post graduate experience is desirable but applications will be considered from 1950 potential graduates if accompanied by a letter of recommendation from Tutor or Professor. Salaries according to age, qualifications and experience within ranges : Principal Scientific Officers—£910-£1,177. Scientific Officers—£380-£620. Posts carry F.S.S.U. benefits. Rates for women somewhat lower. Application forms obtainable from Ministry of Labour and National Service, Technical and Scientific Register (K), York House, Kingsway, W.C.2, quoting reference number. Closing date, 24th July, 1950. W 2398

THE ADMIRALTY invite applications for a limited number of temporary appointments in the Senior Experimental Officer and Experimental Officer grades for employment for periods not exceeding three years at Admiralty Experimental Establishments situated in various parts of Great Britain. Candidates should be either (1) Mechanical Engineers (C.267/50) who have had research and development experience in light mechanisms ; or (2) Electrical Engineers (D.152/50) or Physicists (A.146/50) with research and development experience in light electrical mechanisms, electronics or acoustics. They should possess one of the undermentioned qualifications : (a) a University Degree in Science, Engineering or Mathematics ; (b) Graduate Membership of an appropriate professional institution ; (c) Higher National Certificate ; (d) the Final Certificate of a five-year grouped course in a relevant subject at the City and Guilds of London Institute, or any comparable Institution. (e) Higher School Certificate with Mathematics or Science as a principal subject, or an equivalent qualification. Candidates must be British subjects. For Senior Experimental Officer posts, they must be at least 35 years of age, and for Experimental Officer at least 26. The London salary scales for men are : Senior Experimental Officer—£735-£935 p.a., and Experimental Officer—£525-£675 p.a. For service outside London, these rates are subject to the standard provincial differentiation ; the salary scales for women are somewhat lower. Exceptionally, starting salaries above the respective minima may be granted according to qualifications and experience. Forms of application may be obtained from the Secretary, Ministry of Labour and National Service, Technical & Scientific Register, York House, Kingsway, London, W.C.2 (K), quoting appropriate reference No. Closing date 20th July, 1950. W 2365

ADMIRALTY. Draughtsmen experienced in Electrical and/or Mechanical Engineering are required for service at various experimental establishments in the south of England. A knowledge of Electronic engineering will be an advantage Appointments will in the first instance be in an unestablished capacity, but there will be an early opportunity to compete for established appointments. Commencing salary will be assessed according to age, experience and location of employment within the range of £283-£525. Candidates must be British subjects and have served an engineering apprenticeship or had equivalent workshop experience of at least 3 years. They should possess the Ordinary National Certificate. Hostel accommodation is available at some establishments. Applications, stating age and details of technical qualifications and apprenticeship (or equivalents) and workshop and drawing office experience, should be sent to Admiralty (C.E.11, Room 88), Empire Hotel Bath. Original testimonials should not be forwarded with application. Candidates required for interview (at London or Bath, whichever is nearest), will be advised within two weeks of receipt of application. W 2362

MINISTRY OF SUPPLY invites applications from Physicists and Electronic Engineers for 4 unestablished appointments in the Experimental Officer Class at a Research and Development Establishment near London, for work in the following fields : 1. Electronic Instrumentation associated with high speed photographic technique and strain gauges. 2. General experimental work involving small mechanism and instruments. A practical outlook capable of tackling ad-hoo problems is desirable. 3. Experience of practical spectroscopy and some familiarity with electronic techniques. Duties will include operation and use of infra red and ultra violet spectroscopic equipment. 4. Radio and Electronics. Candidates should possess qualifications in Physics or Electrical Engineering preferably to Degree standard, with experience appropriate to the post applied for. Posts are in Experimental Officer Grade (minimum age normally 28), but a candidate otherwise suitable may be appointed as Assistant Experimental Officer. For Post 2 a Senior Experimental Officer appointment (minimum age normally 35) would be considered. Salary according to age and experience within ranges : S.E.O. £705-£895 ; E.O.—£495-£645 ; A.E.O.—£220-£460. Rates for women somewhat lower. Write, quoting A.158/50, to Ministry of Labour and National Service, Technical and Scientific Register (K), York House, Kingsway, London, W.C.2, for application form, which should be returned completed by 14th July, 1950. W 2397

MINISTRY OF SUPPLY invites applications from Physicists for unestablished appointments in Scientific Officer Class at Research and Development Establishments near London. Candidates should have a 1st or 2nd class Honours Degree in physics and good general electronic knowledge and experience. For one post familiarity with V.H.F. circuit techniques and modern valve design would be an advantage. Candidates for Senior posts must be at least 26 years of age and have had a minimum of 3 years post graduate research experience. Salary according to age, qualifications and experience within ranges : Senior Scientific Officer—£670-£860. Scientific Officer—£380-£620. Posts carry F.S.S.U. benefits. Rates for women somewhat lower. Application forms obtainable from Ministry of Labour and National Service, Technical & Scientific Register (K), York House, Kingsway, W.C.2, quoting A.172/50A. Closing date, 24th July, 1950 W 2404

THE CIVIL SERVICE Commissioners invite applications for about 20 permanent appointments as Wireless Technician (Male) in the Regional Wireless Service under the Home Office. Candidates must have been born on or after 2nd June, 1900, and on or before 1st June, 1929. They must have a sound theoretical and practical knowledge of wireless engineering with at least three years' experience in the construction and maintenance of wireless communication equipment, including Very High Frequency apparatus, and be able to use technical equipment and simple machine tools. Salary, £280 (at 25)-£370. Further particulars and application forms from Secretary, Civil Service Commission, Scientific Branch, 7th Floor, Trinidad House, Old Burlington Street, London, W.1, quoting No. 3137. Completed application forms must be returned by 28th July, 1950. W 2405

THE CIVIL SERVICE Commissioners invite applications for permanent appointments in the Royal Naval Scientific Service. Two Principal Scientific Officers. Post (a) a Physicist or Electrical Engineer possessing a high class Honours Degree, with research experience and necessary knowledge to undertake investigations, other than mathematical, required for the development, and the development itself of High Speed electronic computing and calculating equipment, together with the ability to take engineering charge of the projects to their completion. Post (b) a Physicist or Electrical Engineer possessing a high class Honours Degree, with research experience in telecommunications with special emphasis on all radio telephony methods and High Speed telegraphy ; the duties to be undertaken call for a profound analytical outlook as the successful candidate will be concerned with investigations rather than the development of equipment. Two Senior Scientific Officers. Post (c) a Physicist possessing a high class Honours Degree, with research experience and a considerable knowledge of electronic circuitry ; the successful candidate would work with the officer mentioned at (a) above in the research and development of High Speed electronic computing equipment ; a knowledge of display circuits, high speed recording and storage will be an advantage. Post (d) a Physicist or Electrical Engineer possessing a high class Honours Degree with experience in telecommunication research with emphasis on radio telephony and high speed telegraphy problems; the successful candidate would work with the officer mentioned at (b) above and must be of a calibre to design the associated equipment. Candidates must have been born on or before 1st August, 1919. The posts (c) and (d) (and similarly graded Scientific posts in other Government Departments) are also open to candidates born between 2nd August, 1919 and 1st August, 1924 (inclusive) through the Open Competition under Normal Regulations already announced (No. 2887). The appointments in the first instance will be to establishments in the Greater London area. Inclusive London salary scales for men are : Posts (a) and (b)—£950-£1,250. Posts (c) and (d) —£700-£900. Rates for women and for posts outside London are somewhat lower. Exceptionally a starting salary above the minimum may be granted according to qualifications and experience. Posts carry benefits under Federated Superannuation System for Universities. Forms of application and further particulars from Secretary, Civil Service Commission, Scientific Branch, Trinidad House, Old Burlington Street, London, W.1, quoting No. 3139. Completed application forms must be returned by 20th July, 1950. W 2408

SITUATIONS VACANT

A NUMBER of Senior and Junior vacancies for Radio, Radar, Electronic, Television, etc., Development, Service Engineers, Draughtsmen, Wiremen, Testers, Inspectors, etc. Urgently required, 30 Television Service Engineers. Write in confidence: Technical Employment Agency, 179, Clapham Road, London, S.W.9. (BRIxton 3487). W 2277

CLASSIFIED ANNOUNCEMENTS (Cont'd.)

ASSISTANT required for more advanced analytical studies in telecommunications. Natural Sciences or Mathematics Degree and some industrial experience desirable. Write, stating qualifications and salary required, to Box No. W 2345.

ELECTRONICS. Large Aircraft Company has vacancies for specialists in Electronics. Applicants should not be under 27 years of age nor have less than five years' experience since qualifying. Responsible positions are offered in connexion with important research and development work. Applications, stating date of birth, qualifications, experience, present job and salary, should be sent to Box No. W 2337.

MAGNETIC TAPE RECORDER.—Development Engineer required with previous experience of mechanical and electrical design work in this field. Write giving full particulars of training and previous experience, also salary required. Box No. W 1149.

GOODMANS INDUSTRIES LTD., Lancelot Road, Wembley. Due to continued expansion we have several vacancies for additional personnel including the following: Engineers for design and development of all types of loudspeakers, microphones, loudspeaker and cone diaphragms. Technical Assistants, Foreman and Chargehands, Technical Correspondents, Cone making personnel, etc. Applicants with suitable qualifications who wish to enter this interesting and expanding field with an opportunity of advancement and security should write, giving details of previous experience, salary received and salary now required. All replies marked Private will be considered and treated in strict confidence. W 2382

WOOLWICH POLYTECHNIC, S.E.18. The Governing Body invite applications for the post of Lecturer in Telecommunications in the Department of Physics and Telecommunication, from men who (a) possess a good Honours Degree in Electrical Engineering (including Telecommunications) or (b) possess a good Honours Degree in Physics and have had experience in the Telecommunications field. Candidates should be prepared to teach to the standard of the Higher National Certificate. Opportunities for teaching degree work may arise. Burnham technical scale salary, £300×£15 to £555, plus London allowance and graduate additions. Starting salary according to industrial and teaching experience. Maximum possible is £708. Full particulars of the post and application forms may be obtained from the Clerk to the Governors, to whom they should be returned within two weeks of the date of this advertisement. W 2381

VICKERS ARMSTRONGS LTD., Weybridge, invite applications for the post of Electronics Engineer to take part in electronic side of special projects. Write, stating experience and qualifications, to: Employment Manager, Weybridge Works. W 2379

VICKERS ARMSTRONGS LTD., Weybridge, invite applications for the post of Project Engineer to be in charge of certain special projects. Qualifications required for this post include experience of control methods and knowledge of electronics and instruments. Write, stating experience and qualifications to: Employment Manager, Weybridge Works. W 2380

AN EXPERIENCED design draughtsman is required for the Nelson Research Laboratories of the English Electric Company, Stafford. The successful applicant will be required for duties connected with special electronic valves and other vacuum devices and it is essential that applicants should be experienced in this class of work. Write, giving full details quoting reference 143 to Central Personnel Services, English Electric Co. Ltd., 24-30, Gillingham Street, London, S.W.1. W 2378

UNIVERSITY OF EDINBURGH. A vacancy for one Technician (Grade B) exists in the Electronics section of the Engineering Department. The duties consist mainly in the construction and repair of electronic equipment, and applicants should have experience in this class of work. Salary range, £240×£15–£330. Applications, stating qualifications and experience should be submitted to the Secretary to the University, Old College, South Bridge, Edinburgh before 15th July, 1950 W 2377

DRAUGHTSMAN with Electronic experience required in the Test Gear Department of large radio manufacturer in East London area. Applicants should have electronic experience on similar equipment. Kindly state full details of experience with age and salary required to Box No. W 2374.

CITY OF BIRMINGHAM Education Committee. Birmingham Central Technical College. Applications are invited for the post of Research Assistant in the Department of Physics and Mathematics for investigations at high frequencies. Candidates should be Honours Graduates of a University to which a thesis for a Higher Degree (M.Sc. or Ph.D.) may be submitted on the basis of research work conducted externally. The appointment will be for two years in the first instance but may be extended to a third year. Research Assistants are required to devote some hours weekly in assisting with laboratory supervision. Starting salary will be £300 with an allowance of up to £90 for degree and training, and with additional allowance for approved industrial or teaching experience. Further particulars and forms of application may be obtained from the Registrar, Birmingham Central Technical College, Suffolk Street, Birmingham, 1. on receipt of stamped addressed foolscap envelope. Completed forms should be returned to him not later than two weeks after the insertion of the advertisement. E. L. Russell. Chief Education Officer. W 2373

DESIGNER DRAUGHTSMAN required for the Design and Development Laboratory of an engineering company of international repute in London. Applicants must possess Higher National Certificate or equivalent qualifications, and have a practical experience of plastic moulds, small special purpose machinery, press tool work and general machine tool knowledge. Apply, stating age, qualifications and experience to Box No. W 2375.

PADDINGTON GROUP Hospital Management Committee. West End Hospital for Nervous Diseases. Applications are invited for the appointment of Junior Technician (Recordist) in the Department of Electro-Encephalography at the above hospital. Candidates with previous experience in E.E.G. will commence on the salary scale £330-£360 according to experience. Applications, in writing, stating age, qualifications, experience together with names and addresses of two referees should be addressed to the Administrative Officer, West End Hospital for Nervous Diseases, 73, Welbeck Street, London, W.1. W 2372

GRADUATE ENGINEERS required for high-frequency cable testing. Apply, giving age, experience and salary required to Ref. 423, Siemens Brothers & Co. Limited, Woolwich, S.E.18 W 2385

QUALIFIED ENGINEER-PHYSICIST, age 25-32 years, with knowledge of measurement technique and at least three years laboratory practice is required for an interesting post in the London, W.1, district. A good salary will be offered to the successful applicant. Write, giving full details of qualifications, experience and salary required to Box No. W 1144.

THE ELECTRONIC Division (South Western) of a leading Radio Company invite applications for the post of Assistant to the Head of the Pre-Production Department. Candidates must have had a good training in light electrical and mechanical engineering practice including control of Machine-shops, Assembly, Wiring and Winding sections engaged in the manufacture of prototype models of radio, radar and general electronic equipment. Ability to plan and progress, and a sound appreciation of Ministry standards in materials, components and finishes is essential. Five years experience in similar capacity is a necessary qualification for the post. Entry into Pension Scheme will be offered after a period of service. Applications will be treated in the strictest confidence and full details should be submitted within seven days of the appearance of this announcement. Box No. W 2371

DEVELOPMENT ENGINEER, experienced in Radio Test Equipment. Good pay and prospects. Write, Taylor Electrical Instruments Ltd., Slough, Bucks. W 2369

RADIO and Electrical Engineer, single aged 26-32, required by British Company trading Middle East. Salary according experience, Pension Scheme cost living allowance, etc. Apply Box No. W 1135.

FIRST CLASS Honours University Graduates in engineering or physics are required for a few outstanding senior positions at the Research Laboratories of the General Electric Co. Ltd., North Wembley, Middx. Only men with initiative and willing to take responsibility will be considered for research and development work in electronic and mechanical engineering laboratories and design offices. Salaries will be commensurate with experience and qualifications. Applications should be sent to the Personnel Officer and should contain a good general background of record to date W 2370

FERRANTI LTD., Moston Works, Manchester, have staff vacancies in connection with long term development work on an important Radio Tele-Control Project. (1) Engineers and Scientists. Ref. R.Sc. Qualifications include a good Degree in Physics or Engineering, and preferably experience in Electromechanical and servo control work, or microwave valve and/or circuit work. Salary according to age and experience, in the range £500-£1,000 p.a. (2) Technical Assistants. Ref. R. Tech. For experimental work on Radar, electronic circuits, microwaves, servo control and electromechanical devices. Qualifications required: H.N.C. or its equivalent in Electrical or Mechanical Engineering. Salary in the range, £275–£550 p.a., according to age and experience. (3) Designer Draughtsmen, Draughtsmen and Junior Draughtsmen. Ref. R.D. With experience in design of Precision medium and light mechanical and electromechanical devices or electronic equipment. Salary according to age and experience based on A.E.S.D. Rates as minimum. The Company has a Staff Pension Scheme. Application forms from the Staff Manager, Ferranti Ltd., Hollinwood, Lancs. Please quote appropriate reference. W 2368

SENIOR PHYSICS or Engineering Graduates required for original experimental work on electronics and ultrasonics in Research Department of Scientific Instrument Makers in London area. Write, stating experience and salary required to Box No. W 2367.

TELECOMMUNICATION research and development engineers are required for work on line communication problems. Applicants should preferably have had experience in this field and should possess a good all round knowledge of present day line techniques and of the analysis and design of transmission networks. A university Degree in engineering or physics would be an advantage. Salary within the range of £300 to £800 p.a. according to qualifications and experience. Applications should be made to the Director of Research, British Telecommunications Research Ltd., Taplow Court, Taplow, Bucks. W 2366

AN INTERESTING opportunity exists for a young and fully qualified electrical engineer with knowledge of electronics in connection with servo mechanism development for aircraft. Write to, Mr. G. Orloff, Chief Designer, British Messier Ltd., Cheltenham Road East, Gloucester. W 2396

APPLICATIONS are invited for the position of Technical Design Engineer in the F.H.P. Motor Laboratory at a large electrical engineering Company in the West London area. Experience of F.H.P. motor design and performance, and ability to accept full responsibility of a project from the initial design stage to factory production is essential. Applicants should possess Engineering Degree or equivalent qualifications. Apply, giving details of age, education and job history to the Employment Officer, Hoover Ltd., Perivale, Greenford, Middx. W 2363

FULLY qualified radio television engineer required able to drive; permanent and steadily improving post for capable man. Apply, giving full details of experience to Derwent Radio, 26, Wadsworth Road, Perivale, Middx. W 1136

RADIO ENGINEER required by large manufacturing organisation in London area for Quartz Crystal Development Laboratory. Knowledge of circuitry up to 200 M.Cs. desirable. Higher National or equivalent essential. Write, stating age, experience and salary requirements to Box No. W 2364.

CLASSIFIED ANNOUNCEMENTS
continued on Page 4

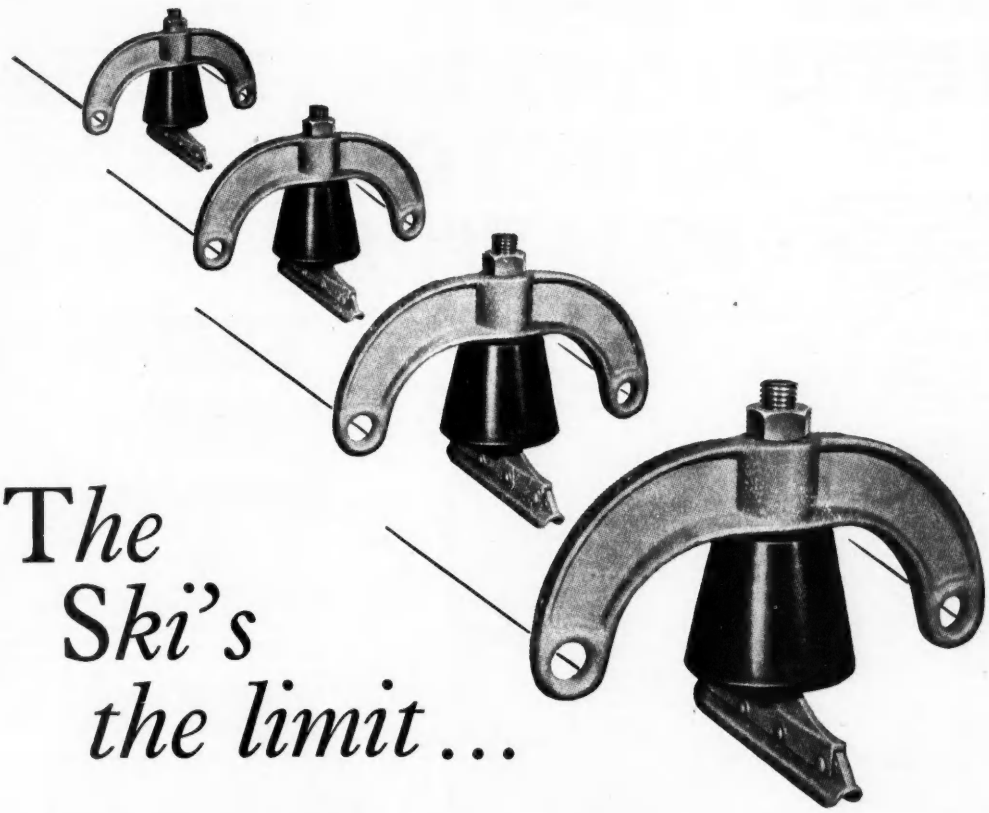

The Ski's the limit...

Our four winter sports enthusiasts are in reality Tufnol bell insulators for overhead power lines. They help us to point to the unlimited potentialities of Tufnol in industry generally.

By way of example: in the case of the moulded Tufnol bell insulators illustrated, absolute reliance can be placed on the impressive figures of its electrical strength and tensile breaking strain — and those figures hold good under the most adverse conditions of exposure for many, many years.



A group of Tufnol Gears. Tufnol is suitable for most types of gears.

But Tufnol is also supplied in sheets, tubes, rods, bars, angles, channels, and other standard sections, to be drilled, tapped, sawn, milled, turned, punched, or routed to your own specification — in your own workshops if required.

Tufnol asks no favours — it can be machined accurately and as easily as hardwood without revealing any of the obvious defects of either wood or metal when subject to corrosive conditions, moisture, impact, or simple wear and tear.

The only limit set to the uses of Tufnol is the limit of your own ingenuity in employing this very versatile material.

HOW MUCH IS KNOWN ABOUT TUFNOL?

We have prepared a series of informative handbooks which contain all the data relevant to Tufnol as a material and many authenticated instances of its application to engineering and industrial problems. Our own Technical Staff are always ready to co-operate in, and report factually on, any proposed new development. Why not write TODAY?

TUFNOL
REGISTERED TRADE MARK
An ELLISON Product

TUFNOL LTD • PERRY BARR • BIRMINGHAM • 22B

248

CLASSIFIED ANNOUNCEMENTS (Cont'd)

ENGINEER INSPECTORS required for employment on all aspects of electrical inspection of prototype electronic equipment. Qualifications: age 25-30, Higher National Certificate standard with production experience in radio engineering. Knowledge of A.I.D. work would be an advantage. Applicants to write, quoting ED/16 and giving full details to Personnel Department, E.M.I. Engineering Development Ltd., Blyth Road, Hayes, Middx. W 2387

ELECTRONIC ENGINEERS are required by a large aircraft company for experimental work on a new and interesting project. Applicants, who should preferably be under 35 years of age, must have received technical education up to a Degree standard and should be experienced either in UHF design and measuring techniques or in instrumentation work. Apply, stating age, experience and salary required to Box No. W 2388.

SENIOR PHYSICIST or Electronic Engineer is required by the English Electric Valve Co. Ltd., Chelmsford, for Research and Development work on travelling wave tubes. Applicants with considerable experience in this field should write, giving full details of qualifications and experience, quoting reference 440 to Central Personnel Services, 24-30, Gillingham Street, Westminster, London, S.W.1. W 2390

ENGLISH ELECTRIC CO. LTD., Chelmsford, require a Junior Engineer for design and development work on high power transmitting tubes. The successful applicant will be required to serve at least 12 months testing transmitting valves in order to gain necessary experience. Write, giving full details, quoting reference 419A, to Central Personnel Services, English Electric Co., 24-30, Gillingham Street, London, S.W.1. W 2389

DESIGNER DRAUGHTSMEN required by Wayne Kerr for work covering a wide range of electronic applications, measurements and radio communications. Applicants should have had several years experience in this class of engineering. Write, giving full details of qualifications and experience, to the Senior Project Engineer, Wayne Kerr Laboratories Ltd., Sycamore Grove, New Malden, Surrey. W 2391

THE MULLARD RADIO Valve Co. Ltd., have vacancies for Junior Assistant Valve Engineers, age 20–30. Education to at least inter B.Sc. and some practical ability preferred. Hours of work, 7.30 a.m. to 5.15 p.m., Monday to Friday, salary according to age, experience and qualifications. Call or write Mr. E. J. Pittman, Mullard Radio Valve Co. Ltd., New Road, Mitcham Junction, Surrey, quoting the reference R.3. W 2392.

ENGINEER required by X-ray equipment manufacturer in N.W. London area for responsible position in Service Department. Applicants must be of good personality and have had administrative experience. Aged 30-40. Good technical education essential also engineering experience, either in X-ray engineering or light electrical engineering. Short period of probationary training will be given to right applicant in London or Provinces before appointment. Apply in first instance by letter, giving details of qualifications and experience, and salary required, to Box " G.W." c/o, Geo. J. Smith & Co. Ltd., 74/76, Temple Chambers, Temple Avenue, London, E.C.4. W 2393

ELECTRONICS. Interesting vacancies now exist in the Nelson Research Laboratories of the English Electric Co. Ltd. University trained engineers or physicists are required for design of special circuits for electronic computing machines at Stafford and in the London area. Vacancies also exist in these laboratories for electronic engineers with H.N.C. (Elect.). Please write, giving full information, quoting reference 305, to Central Personnel Services, English Electric Co. Ltd., 24-30, Gillingham Street, London, S.W.1. W 2395

JUNIOR Electrical Engineers are required for the development and design of television camera and associated equipment at Marconi's Wireless Telegraph Co. Ltd., Chelmsford. Salary, £350–£550 p.a. Senior Engineers with research or development experience in this field also required. Salary £600–£800 p.a. Send full details quoting reference 323A to Central Personnel Services, English Electric Co. Ltd., 24-30, Gillingham Street, London, S.W.1. W 2394

WANTED, ENGINEERS interested in the application of electronic equipment in the industrial field (a) For test of prototype and special equipment. (b) For liaison with customers and commissioning of equipment. Applicants should have a sound electrical or electronic background and be educated to National Certificate Standard or equivalent. Also required are young engineers with electrical or electronic training for positions as assistants in development laboratory. Applicants for any of the above positions should write, giving details of age, education, experience and salary required to: British Electronic Products (1948) Ltd., Rugeley, Staffordshire. W 2384

REQUIRED IMMEDIATELY, Senior Draughtsman. Must have ten years experience in design and development of (a) Electromechanisms. Electronic chassis and ancillary equipment. Design and development. (b) Mechanisms, instrument type. H.N.C. standard and above. Situated in Surrey offering good remuneration and conditions in rapidly expanding research and development organisation. Write, stating experience, age and salary. British born personnel only are required. Box No. W 1140

JUNIOR DRAUGHTSMAN required in Surrey research organisation. Age 20-25. Situation offers great scope and opportunity under ideally congenial conditions. Experience should be of electromechanical nature. Write, stating age, experience, schools and present salary. Box No. W 1141.

EXPERIENCED service engineer required, radio and television, able to drive, good salary for right man. F. Higgins, High Street, Ware. Tel.: 214. W 1137

ASSISTANT required by Commercial Manager of large company in London, engaged in manufacture of specialised radio and radar equipment. Broad experience necessary of all commercial activities, handling of contracts, correspondence and internal co-ordination. Some knowledge of radar or radio an advantage. Interesting opportunity for versatile energetic young man of good personality. Pension Scheme in operation. Write fullest details, age, experience and salary required, to Box No. W 2361.

DEVELOPMENT ENGINEER required for the design of Short Wave Diathermy equipment and similar industrial H.F. Heaters. B.Sc., A.M.I.E.E., or Higher National. Age 25-40 years. Good experience essential including crystal control, particularly in the range 10-50 megacycles. Write, stating experience and salary required to Personnel Manager, The Edison Swan Electric Co. Ltd., Ponders End, Enfield. W 2360

DRAUGHTSMEN with Electronic experience required by large Radio manufacturer in the East London area. Applicants should have thorough drawing office training and technical education to National Certificate or equivalent standard. Kindly state details of technical training and experience with age and salary required to Box No. W 2359.

SENIOR ELECTRONIC Engineer fully experienced in light electro mechanical engineering required for development work in industrial electro mechanical equipment. A thorough knowledge of general electrical engineering and electronic techniques is required. Applicants should be capable of carrying through a project to the production prototype entirely on their own initiative. Box No. W 2402.

SENIOR ELECTRONIC Development Engineer fully experienced in light electromechanical engineering required for development work on microwave transmission systems including the design of wave guide rotating joints paraboloid reflectors with dipole feed and equipment for the measurement of antenna system polar diagrams. Box No. W 2403.

APPLICATIONS are invited for the position of Technical Representative in the Manchester and Northern area in connection with the Company's manufactures of Industrial electronic equipment. Appropriate technical and commercial experience with this class of equipment is essential. The position is permanent and the successful candidate will be required to live in the Manchester area. Car will be provided. Apply, quoting reference 356B to Central Personnel Services, English Electric Co. Ltd., 24-30, Gillingham Street, London, S.W.1. W 2406

THE GENERAL ELECTRIC CO. LTD., are expanding their Radio Development Laboratory at Coventry and a number of vacancies for Senior and Junior Engineers exist at present and a further considerable number of vacancies will occur during the next few months in the new laboratory. Applications are invited from Development Engineers with experience of microwave radio or radar techniques who are capable of developing equipment and components to service specifications. Write, quoting Ref. C.H.C. (1) to Personnel Officer, General Electric Co. Ltd., Radio & Television Works, Coventry. W 2401

INSTRUMENT DRAUGHTSMAN required for design work on Electronic, Electrical and Mechanical devices. Interesting work on new projects for keen man with intiative. Apply, in writing, giving details of experience and qualifications, to K.D.G. Instruments Ltd., Purley Way, Croydon, Surrey. W 1146

SECRETARY (Shorthand Typist) wanted by Editor of Radio Journal in London. Familiar with technical terms and some experience of radio industry and organisations. Interesting work; 5-day week. Box No. W 2407.

ELECTRONICS ENGINEER. A large firm in S.E. London has vacancy for experienced man with Honours Degree. Good prospects for advancement. Apply, with details of age, experience, salary expected. Box No. W 1147.

E. K. COLE LTD. (Electronics Division) invite applications for the post of Senior Engineer Physicist. The person appointed will be responsible for the design of Electronic equipment, for nuclear research, Health protection, and the application of Radioactive Isotopes to industrial problems. A good Physics Degree is an essential qualification. Candidates should have an intimate and up-to-date knowledge of Atomic Physics, together with a sound knowledge of modern electronic circuit techniques, and not less than five years' experience on equipment design. Salary will be commensurate with the degree of responsibility the successful applicant is able to carry, and entry into the Company's Pension Scheme will be offered after a period of service. Full particulars, in writing, to the Personnel Manager, Ekco Works, Malmesbury, Wilts. W 2411

PHYSICISTS and Physical Chemists, up to the age of 35 years, with Honours Degree, required for various new posts on the development of radio receiving valves and associated manufacturing processes. Previous experience desirable but only essential for the senior posts. Special training courses for Graduates direct from College. Salary according to qualifications and experience. Only applicants with drive and initiative need apply, stating age, qualifications, experience and salary required, to Personnel Officer, Brimar Valve Works, Footscray, Sidcup, Kent. W 2409

SENIOR TELEVISION Engineer required by the English Electric Co. Ltd., to supervise development and take general technical control of television receiver engineering at their Liverpool Works. Applicants, who should be qualified engineers with extensive experience in this class of work, should write, giving full details quoting reference 447, to Central Personnel Services, English Electric Co. Ltd., 24-30, Gillingham Street, London, S.W.1. W 2414

ELECTRO-ENCEPHALOGRAPH Recordist. Winwick Hospital, Warrington, has a vacancy for a full-time E.E.G. Recordist, to take charge of the Department and do a small amount of other electro-diagnostic work. Salary, £300 by £15 to £360 p.a. Applications would also be considered from persons who have had some experience in this work or in an electronic research laboratory to the level of School Certificate with five credits. Such untrained personnel would, if appointed, be required to undergo training for a period of ten weeks in Bristol or in London. Leave, with pay, would be granted for this purpose, the salary during the period of training being £260 p.a. or on the General Division of the A.P.T. Scales, whichever is the lower. Applications should be received by the Medical Superintendent not later than 1st August, 1950. W 2415

CLASSIFIED ANNOUNCEMENTS
continued on Page 6

REMOTE POSITION INDICATION
• • SERVO CONTROL • •
• • COMPUTATION • •

POST THIS COUPON for DESCRIPTIVE LITERATURE

MAGSLIPS

SIZES: 1½" 2" and 3"
VOLTAGES: 50V to 150V according to type
FREQUENCIES: 50 c/s to 1100 c/s according to type

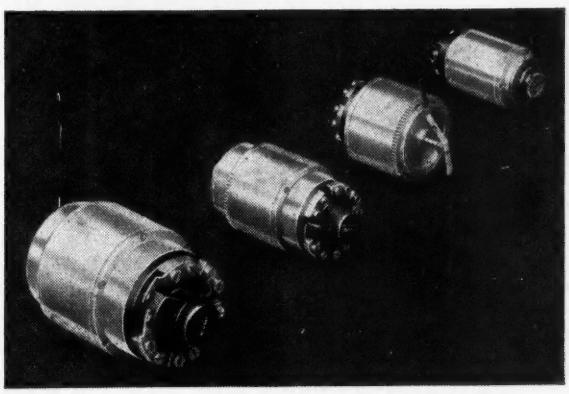

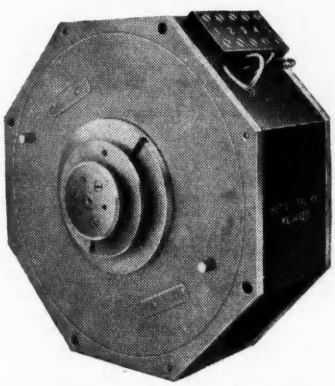

INDUCTIVE POTENTIOMETER (IPOT)

DIMENSIONS: 6½" x 6½" x 3 1/16"
SUPPLY: 50V 50 c/s

MUIRHEAD & CO. LTD.,
BECKENHAM · KENT · ENGLAND

Please send me Bulletins B-580 and B-604 fully describing the Magslips and Ipots advertised in "Electronic Engineering."

NAME.....

ADDRESS.....

.....

.....

MUIRHEAD & CO. LTD.
PRECISION ELECTRICAL INSTRUMENT MAKERS
BECKENHAM · KENT · ENGLAND

Telephone : BECkenham 0041 Telegrams & Cables : MUIRHEADS ELMERS-END

PRECISION MUIRHEAD ELECTRICAL INSTRUMENTS

48A

CLASSIFIED ANNOUNCEMENTS (Cont'd.)

REQUIRED, Student Technician, age 17-21, Biophysics and Electronics Section. Salary from £110 p.a. to £225 p.a.—£10 London weighting. Apply Secretary, Post-Graduate Medical School, Ducane Road, London, W.12. W 2410

OUTSIDE Salesmen wanted for March (Cambs.) and Norwich. Wage and good commission. Write, Godfrey Radio Television, Brundell, Norwich. W 1145

FOR SALE

VALVES. Guaranteed new and boxed. Few Government surplus, 6L6, 8s. 6d.; 78, 6s. 3d.; 6F6, 5s.; 6J7, 4s. 9d.; EL33, 8s. 6d.; 6K8, 5s. 6d.; 6Q7, 5s. 6d.; 6K7, 4s. 9d.; 6J5, 4s.; 6N7, 5s. 6d.; 6C5, 5s. 6d.; 6X5, 4s. 9d.; VU39, 6s. 3d.; EF39, 5s. 6d.; 25L6G, 6s.; KTW61, 4s. 9d.; 5Y3, 6s. 3d.; KT44, 5s. 6d.; 6V6, 4s. 9d.; EBC33, 4s. 9d.; U18, 6s. 3d.; 5U4G, 5s.; 5Z4, 4s. 9d.; 14F6G, 4s. 9d.; 6SG7, 4s. 6d.; VU111, 4s.; SP4, 4s. 9d.; 6SH7, 3s. 6d.; 807, 4s. 9d.; SP61, 3s. 6d.; SP41, 3s. 6d.; EA50, 3s.; EF50, 6s.; 6H6, 2s. 9d.; EL32, 4s.; EK32, 4s.; ECH35, 6s. 6d.; VU39, 6s. 6d. Postage paid, C.W.O. or C.O.D. Wholesale only. Send for list of over 500 Radio Lines. William Carvis, 103, North Street, Leeds, 7. W 1121

WALKY TALKY, all-dry, brand new, miniature 7-9 Mc/s., 65s. each; two 60W transmitters, 15 Gns. each. Collins Radio, 24, Lilyville Road, S.W.6. RENown 4178. W 1100

WEBB'S 1948 Radio Map of World, new multi-colour printing with up-to-date call signs and fresh information; on heavy art paper, 4s. 6d., post 6d. On linen on rollers, 11s. 6d., post 9d. W 102

AMERICAN MAGAZINES. One year post free. "Radio Electronics," 32s. 3d.; "Audio Engineering," 28s. 9d.; "Radio and Television News," 36s.; "Popular Science," 28s. 6d. S.A.E. for full list from Willen Ltd. (Dept. 9), 101, Fleet Street, London, E.C.4. W 2214

M/COIL MICAPHONES, new, boxed, 1s. each. Valves VR54, VR65, AVR92, all 2s. each. 6J5, VR65, 6SU7, 6AC7, 3s. each.; EF50, 6L6, 5U4, 6s.each, new, boxed; XTAL 21-22, 101 Sylvanic, 3s. 6d. each. 2-pin plugs, sockets, 6d. complete. V/Controls, 2s. each. Belling & Lee plugs, 5-pin and 7-pin and sockets, 6d. each, C.W.O. Harry White Amateurs Paradise, 155, Humberstone Road, Leicester. W 1123

TELEVISION. The trade is invited to contact us for P.M. focus rings, televisor R.F. and deflector coils, Low C line transformers, and new iron-cored inductances of high upper frequency limit and remarkably low ECH loss. Value for money assured, quality precludes low prices. Bel Sound Products Co., 10, Marlborough Yard, Marlborough Road, Upper Holloway, London, N.19. W 110

I.P.R.E. Technical Publications. 5,000 alignment peaks for superheterodynes, 4s. 9d. post free; "The Practical Radio Engineer," quarterly publications of the Institute, sample copy, 2s. post free; membership and examination data, 1s. post free. Secretary, I.P.R.E., 20, Fairfield Road, London, N.8. W 2320

VALVE BOXES, new, plain, 1,000, 25s.; 2,000, 45s.; 5,000, £5. C.W.O., C/P. Amateurs' Paradise, 155, Humberstone Road, Leicester. W 1126

TELEVISION. All parts in stock for E.E. televisor, Haynes scan and focus coils; line trans. model on view. H. G. Radio, 1350, Stratford Road, Birmingham, 28. W 1113

AUTOMATIC Voltage Regulators for AC mains. Ferranti 7.5 KVA; moving coil; frequency compensated; undistorted output waveform. Tapped to suit any nominal supply between 200 and 250 V, 1 ph, 45 to 66 cps. Input voltage may vary from 88 per cent to 108 per cent of nominal. Output: 100 per cent ± ½ per cent. Complete with voltmeter, spares, handbook. Brand new, in original oiled paper wrappers and export packing cases. Gov't surplus. Offered at a fraction of normal cost. Overseas enquiries invited. P. B. Crawshay, 166, Pixmore Way, Letchworth, Herts. W 2355

MAGNETIC TAPE. Emitape, 25s. per spool, 1,200 ft. Disc recording machines and blank discs, ribbon and M/C. microphones, amplifiers, tape desks, etc. Full trade terms available. Delivery from stock. Sound Discs (Supplies) Ltd., 178, Bispham Road, Southport, Lancs. Telephone: 8153. W 1096

CONDENSERS, 0.01 mfd. 5,000 wkg., 0.02 8,000 wkg., Can type, 2s. 6d. each. Amateurs' Paradise, 155, Humberstone Road, Leicester. W 1125

JACK PORTER Ltd. (Radio). Send for full lists of new and ex-Government equipment, 30/31, College Street, Worcester. W 1128

ELECTRONICS. Write to the firm which specialises in electronic equipment for your requirements in relays, valves, thyratrons, photo-cells, electron multipliers, special C.R.T., image converters, selsyns, velodynes, etc., as well as all components. A. McMillan, 5, Oakfield Road, Bristol, 8. W 1102

MERCURY SWITCHES are made by Hall Drysdale & Co. Ltd., of 58, Commerce Road, Wood Green, London, N. 22. Phone BOWes Park 7221-2. W 107

WOODWORK of all descriptions, large and small quantities: your enquiries invited. Repetition Woodworks Ltd., Old Roller Mill, South Darenth, Kent. W 1132

COPPER screening cans, 2¾ × 1¼ in. for sale cheap. Chassis mounting. Large quantity, suitable all radio television components. Sample on request. Box No. W 2383.

ELECTRIC motor and rotary converters, all sizes in stock. Universal Electrical, 221, City Road, London, E.C.1. W 1118

1949 Fordson Van, equipped as mobile recording van, complete with twin recorders, generators, battery bank, mics, cables, etc., all gear completely installed and van P.A.; also would sell complete or in part; cost nearly £2,000 new. Rapstone Radio & Recording Co., 44, Fountayne Road, London, N.16. W 1139

EVERYTHING for Radio Constructors: Condensers, coils, valves, resistors, etc. Send stamp for list. Smith, 98, West End Road, Morecambe. Quick Service. W 1134

ENTIRE CONTENTS of well-equipped electrical and chemical laboratories for sale, covering Q meters, radio frequency measuring instruments, Bridges R.F., moving coil instruments, avometers, scales, microscopes, etc. Apply for complete list to Truvox Engineering Co. Ltd., 130, Mount Street, W.1. W 1133

INDUCTANCES—Ferrous Oxide Cores 3H to 3μC1 MCS. Q100 to 300. Bel Sound Products, Mfs. Elect. Engrs., Marlborough Yard, Archway N. 19. North 1025. W 111

TAYLOR signal generator 65B, almost new, £12. Herbert, 17, Bedwell Road, London, N.17. W 1150

COILS. Special inductances 1μH to 2HQ at RF wound to order. Bel Sound Products Co., Marlborough Yard, Archway, N.19. Archway 5078. W 112

FOR SALE. Constant Voltage Transformer by Advance Components Ltd. Type MT 218A: Input, 190 to 260 volts 50~; output, 230 volts R.M.S., 1.8 K.W. Price, £20. Apply to Secretary, Institute of Psychiatry, Maudsley Hospital, Denmark Hill, S.E.5. W 2400

T.V. DI-POLE Insulators in moulded bakelite, fit ½ in. elements and 1 in. boom, 5s. each. C.W.O. M. & B. Radio, 120, Holt Road, Liverpool, 7. W 1138

OSCILLOSCOPE, Dumont 241, list £150, excellent condition, £65. Parker, 12, Cobham Terrace, Greenhithe, Kent. W 1142

EDUCATIONAL

CITY AND GUILDS, (Electrical,) etc., on "No Pass—No Fee" terms. Over 95 per cent successes. For full details of modern courses in all branches of Electrical Technology, send for our 112-page handbook—free and post free. B.I.E.T. (Dept. 337C), 17, Stratford Place, London, W.1. W 100

THE POLYTECHNIC, 309, Regent Street, W.1, Electrical Engineering Department. Head of department: W. H. Date, B.Sc.(Eng.), M.I.E.E. Full-time Day Courses are provided in Electrical and Telecommunications Engineering. The courses, which extend over a period of three to four years, prepare for the Higher National Diploma, and professional examinations and for the B.Sc.(Eng.) Lond. Session 1950-51 begins on September 19th, 1950. Evening Courses in the above subjects and also in Radio and Television Service Work commence on Monday, September 25th. The courses prepare for the Ordinary and Higher National Certificate and for the City and Guilds of London Institute examinations. New students will be enrolled on September 20th, 6-8 p.m. Prospectuses may be obtained on application to the undersigned, J. C. Jones, Director of Education. W 2301

UNIVERSITY OF EDINBURGH. Post-Graduate Course in Electronics and Radio. A one-year Post-Graduate Course in Electronics and Radio will commence on October 10th, 1950, to provide specialised training for Graduates wishing to undertake research in this field. Applicants should hold an Honours Degree in Electrical Engineering, Mathematics or Physics. Full particulars may be obtained from the Dean of the Faculty of Science, King's Buildings, West Main Road, Edinburgh, with whom applications must be lodged by July 31st, 1950. W 2358

SERVICE

ARMATURE and motor repairs of all descriptions; vac. grinders, drills, gram. motors, split phase, transformers rewound; lowest quotations and speediest service; new commutators and bearings supplied and fitted. W. D. T., 77, Gt. Western Street, Manchester, 16. W 1103

GLASSBLOWING, repetition and scientific, by Hall Drysdale & Co. Ltd., of 58, Commerce Road, Wood Green, London, N.22. Phone BOWes Park 7221-2. W 109

TRANSLATIONS and Abstracts, Physical Sciences/French, German, Russian. 36, Chatsworth Gdns., W. Harrow, Middx. W 1148

ELECTRICAL Measuring Instruments of every make repaired and standardised. The Electrical Instrument Repair Service, 329, Kilburn Lane, London, W.9. Tel.: Lad. 4168. W 1151

SERVICE SHEETS for hire, reasonable terms. S.A.E. for particulars to W. J. Herbert, 118, Gelli Road, Gelli Pentre, Rhondda, Glam. W 1143

WANTED

WE WILL BUY at your price used radios, amplifiers, converters, test meters, motors, pick-ups, speakers, etc., radio and electrical accessories. Write, phone or call, University Radio Ltd., 22, Lisle Street, London, W.C.2. GERrard 4447. W 103

B
T-H

Infra - red Photo - conductive cells

For Pyrometry, Spectroscopy, and the Detection of Radiant Heat

These lead sulphide cells are the fastest and most sensitive devices for the detection and measurement of infra-red radiation in the 1 to 3 micron wavelength region of the spectrum. They are sensitive to source temperatures as low as 200°C, and they respond to temperature variations within 100 microseconds.

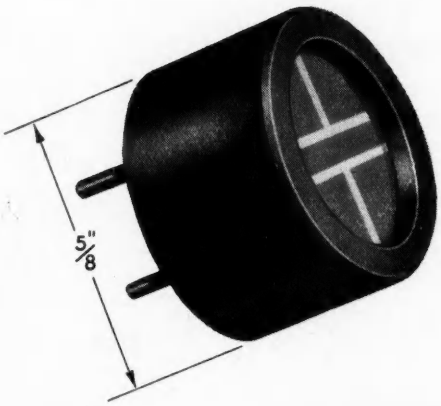

Left: Type "M", for detection and pyrometry, is of minimum dimensions and simple mechanical construction.

Below: Type "C.1", for detection and spectroscopy. This cell has provision for cooling by carbon dioxide, a feature which considerably increases its sensitivity.

Other BTH infra-red devices include: Nernst filaments (as infra-red sources), special infra-red transmitting glass, and semiconductor bolometers.

Full particulars on application.

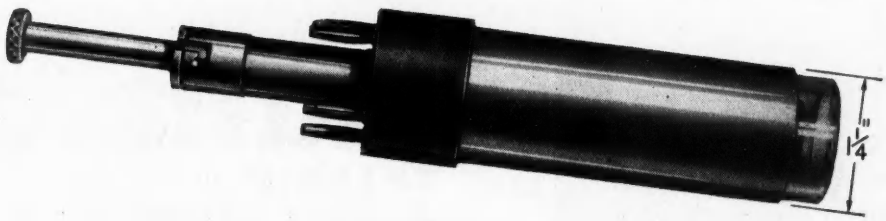

BRITISH THOMSON-HOUSTON

THE BRITISH THOMSON-HOUSTON CO., LTD., RUGBY, ENGLAND

A 3706

DISC-SEAL TRIODES
for Ultra High Frequencies



ME 1001

ME 1003

Mullard News Letter

Manufacturers, designers and consultants who are not already on the mailing list for this service of advance information on new valves, are invited to write for full particulars.

For U.H.F. links, local oscillators, and wide band applications such as multi-channel communication systems and radar altimeters, frequencies up to 1500 Mc/s or even 3000 Mc/s are often required. The Mullard Disc-Seal Triodes have been designed specifically for such purposes.

In the ME1001, adequate cooling and low inductance are combined in the design of the anode and grid discs to give an anode dissipation of 10 watts and an upper frequency limit (as an oscillator) of 3750-3500 Mc/s (8-8.5 cm).

The ME1003 is basically similar in design to the ME1001, but the larger electrodes permit an anode dissipation of 25 watts. However, the larger clearances necessary to obtain this value, limit the upper frequency to 2500 Mc/s.

PRINCIPAL CHARACTERISTICS		
	ME 1001	ME 1003
Heater Voltage (V)	6.3	6.3
Heater Current (A)	0.4	1.0
Max. Anode Voltage (V)	350	500
Max. Anode Dissipation (W)	10	25
Max. Anode Current (mA)	50	200
Max. Peak Anode Current (mA)	150	500
Power Output (W)	0.5 (at 3000 Mc/s) 3.5 (at 500 Mc/s)	6 (at 1500 Mc/s) 20 (at 430 Mc/s)
Mutual Conductance (mA/V)	6	20
Amplification Factor	30	30

Mullard
THERMIONIC VALVES & ELECTRON TUBES

Mullard

INDUSTRIAL POWER VALVES · THYRATRONS · INDUSTRIAL RECTIFIERS · PHOTOCELLS FLASH TUBES · ACCELEROMETERS · CATHODE RAY TUBES · STABILISERS AND REFERENCE LEVEL TUBES · COLD CATHODE TUBES · ELECTROMETERS, ETC.

MULLARD ELECTRONIC PRODUCTS LIMITED, CENTURY HOUSE, SHAFTESBURY AVENUE, LONDON, W.C.2

MVT 64

950

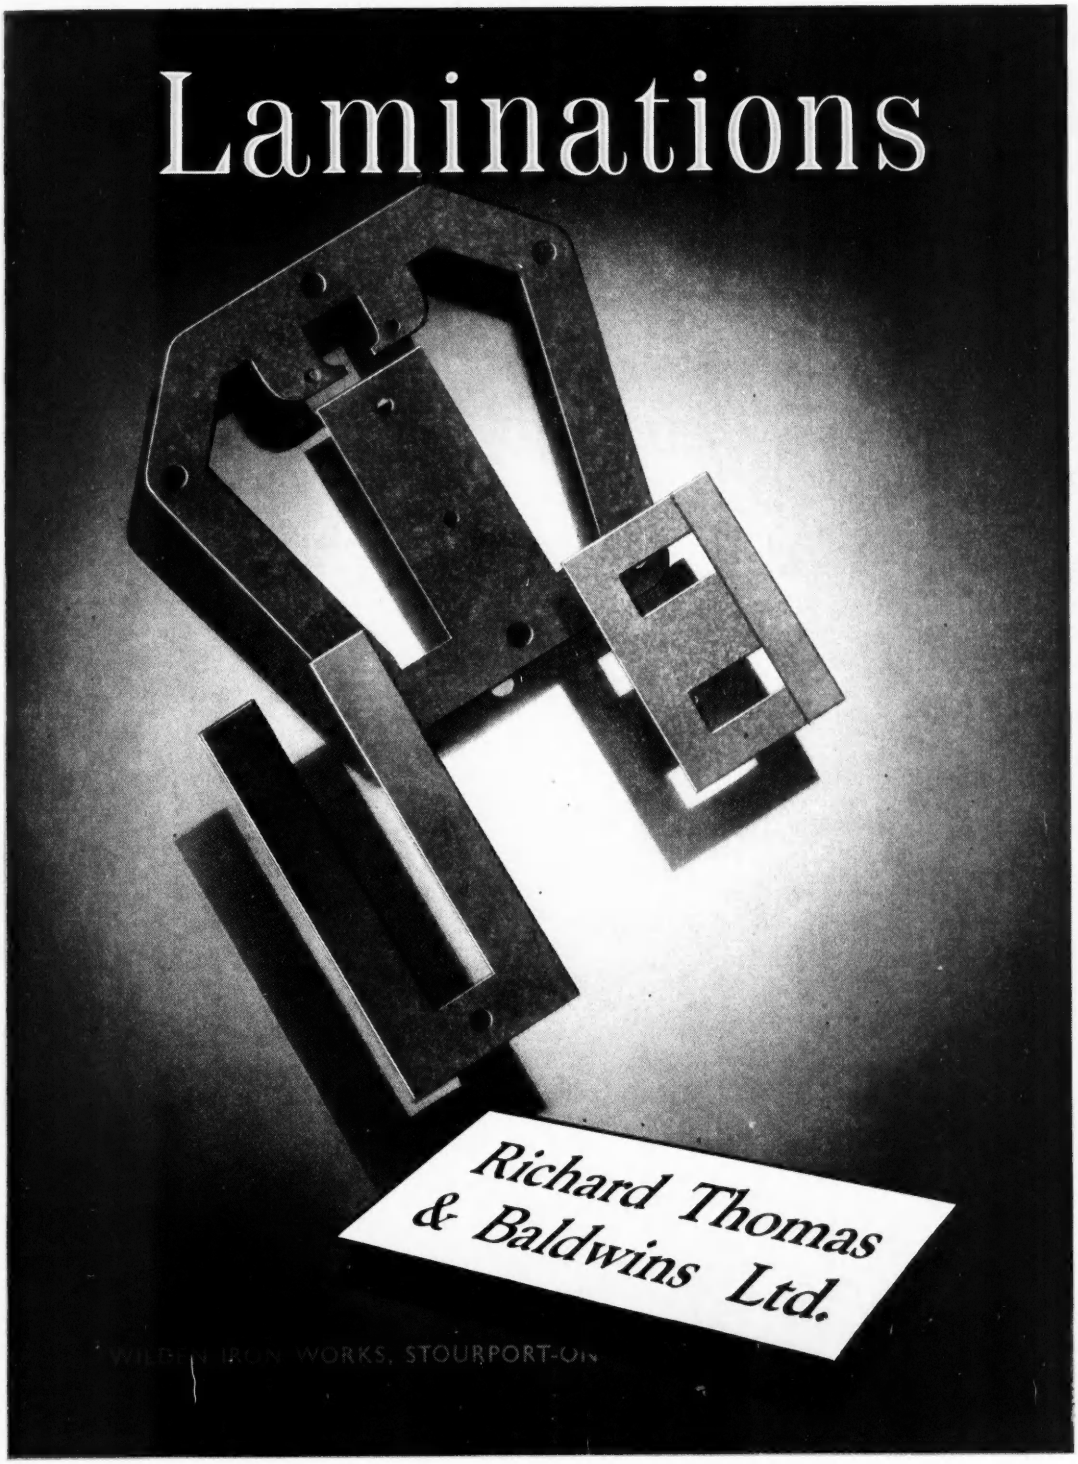
Laminations
Richard Thomas
& Baldwins Ltd.

Kinney High Vacuum..

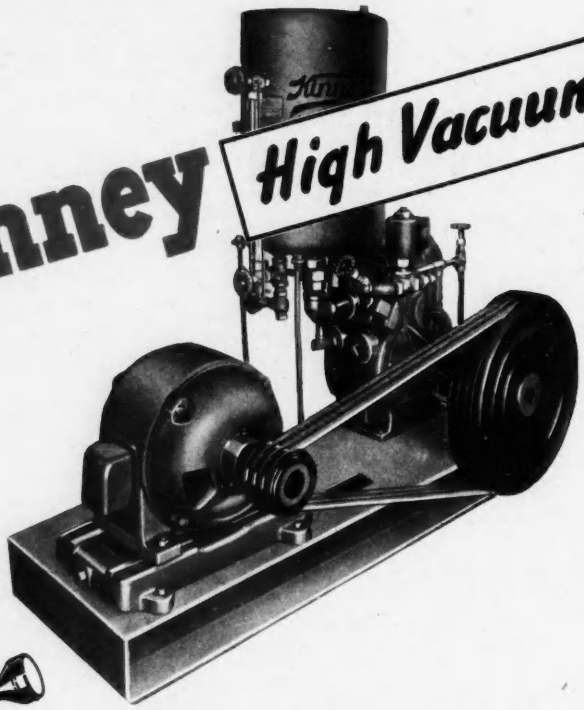

CATHODE RAY TUBES

COATED LENSES

MIRACLE DRUGS



SINTERED METAL

DEHYDRATED FOODS

COMMERCIALISES LAB. PROCESSES

YESTERDAY'S LABORATORY DISCOVERIES are daily being made into profitable commercial projects by KINNEY High Vacuum Pumps. Already earning big profits for user in scores of processes—including exhausting lamps and valves, dehydrating foods and other substances, making drugs, brazing in vacua, vapourising and depositing metals and other materials on lenses, plastics and so on, impregnating electrical components and " improved " woods—they will do so for you too if vacuum technique can be applied. It will pay you to write for the Kinney Pump Bulletin 101.

GENERAL ENGINEERING CO. (RADCLIFFE) LTD.

STATION WORKS, BURY ROAD, RADCLIFFE.
London Office: Third Floor, 9, Victoria Street, LONDON, S.W.1.

Low absolute pressures of 0.5 microns (compound models) and 10 microns (single stage) are the astonishing figures produced by these pumps, unaided by diffusion pumps. With or without the latter, Kinney Pump's rapid pump-down cuts processing times considerably.

Hopwood

Ju

TORQUE OZ INS

DATA SHEET No. 2

EVERSHED
SPECIAL DUTY F.H.P. MOTORS

TYPICAL A.C. SERVO MOTORS FOR ELECTRONIC CONTROL

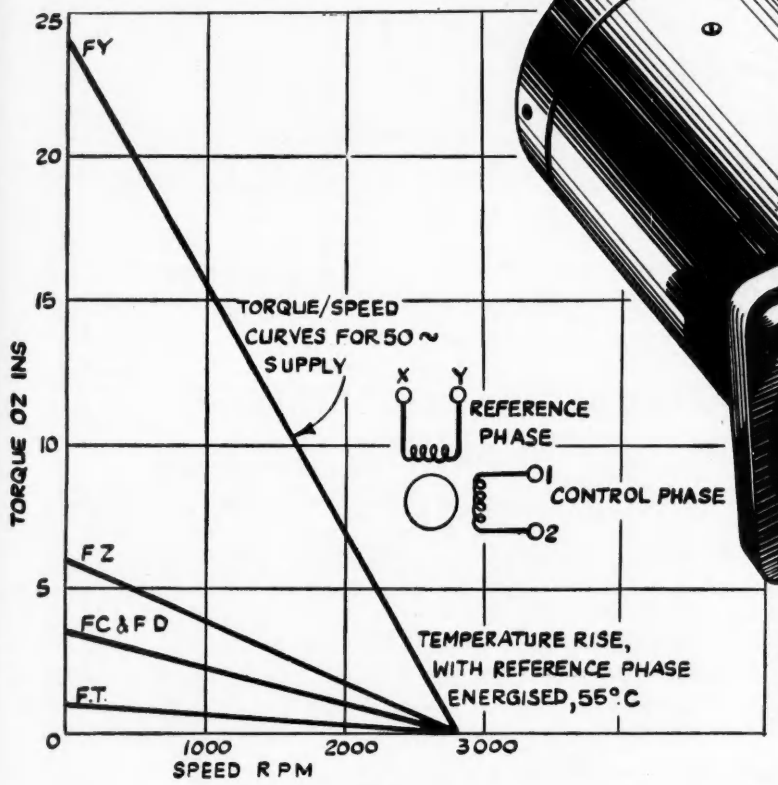

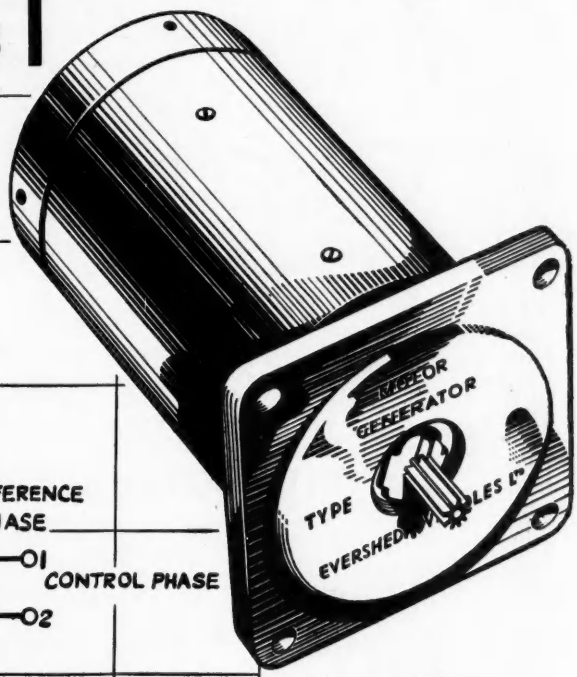

FRAME SIZE	MOMENT OF INERTIA OZ. INS.²	REFERENCE PHASE WATTS.	CONTROL PHASE WATTS.	OUTPUT WATTS.
F.T.	.10	—	—	—
F.C.	.18	8.6	11	2.5
F.D.	.2	8.6	11	2.5
F.Z.	.27	12.0	12	4.5
F.Y.	.6	35.0	35	17.0

Motors wound for 50-240 volts working, 50 and 60 C.P.S.

Antihunt induction generator may be fitted to all motors, giving 0.75 V./1000 R.P.M.

All motors rated for a temperature rise with reference phase energised of 55°C.

Send for the Eversheds Small Motors' Data Book. EE 22.

EVERSHED AND VIGNOLES LIMITED

ACTON LANE WORKS · CHISWICK · LONDON · W4

Telephone: Chiswick 3670 *Telegrams: Megger, Chisk, London* *Cables: Megger, London*

5/165

C

CINTEL

HOW LONG IS A PIECE OF STRING ?

To this age-old teaser there is but one answer — measure it !
It's the same with an amplifier, its performance cannot be judged merely by visual inspection; measurements must be made which are far more involved than the measurement of string . . .

The 'CINTEL' SQUARE WAVE & PULSE GENERATOR

enables the response and transient characteristics of an amplifier to be determined in a matter of minutes.

For full technical details and further applications of this instrument, please write for leaflet No. S.W.G.1/1.

CINEMA-TELEVISION LIMITED

A Company within the J. Arthur Rank Organisation

FOREMOST IN THE MANUFACTURE OF

• Counters & Chronometers • Metal Detectors • Oscilloscopes • Photo-Electric Cells • Cathode Ray Tubes • Geiger-Muller Tubes • Electronic Instruments

WORSLEY BRIDGE ROAD · LONDON · S·E·26

Telephone: HITher Green 4600

Northern Agents:
F. C. ROBINSON & PARTNERS LTD.
287 Deansgate, Manchester 3

Scottish Agents:
ATKINS, ROBERTSON & WHITEFORD LTD
100 Torrisdale Street, Glasgow, S.2

CINTEL

REGISTERED TRADE MARK

The "Belling-Lee" page for Engineers

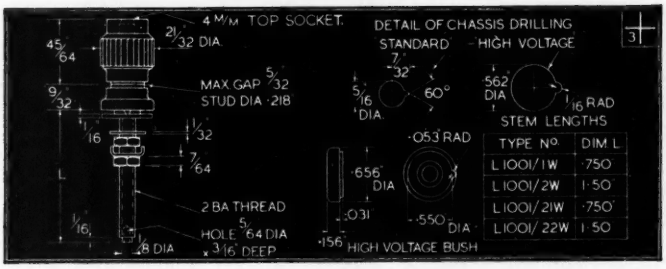



Type	Rtg. in amperes	Peak Wkg. Voltage
"B" Standard	15	1,000
"B" High voltage	15	2,000
"H"	100	1,500
"F"	30	1,000
"L" Standard	15	1,000
"L" High voltage	15	2,000
"R" when fitted with insulating bush & washer	9	350
"W"	15	750

The famous "Belling-Lee" "B" type terminal is now offered as a *High leakage resistance* terminal (details below). The above, the standard and high voltage types, can be supplied with plain red or black high grade bakelite tops★ or with 4 mm. top socket, and have an anti-twist wedge on collar; no thread in clamping gap; special eared clamping washer and soldering spill for alternative methods of connection; nickel plated metal parts.

Ratings and voltages of these and other terminals are shown in the table opposite.

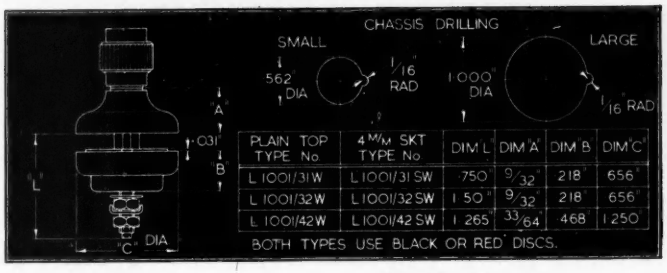



20 Million Megohms

High leakage resistance terminal

20 million of anything is a lot. 20 million megohms is the leakage resistance of the new "Belling-Lee" high leakage resistance terminal specially designed for instrumentation in nuclear physics, triode electrometers, high resistance bridges, etc. The smaller type has a resistance of 3.6 million megohms. Tests were taken at 850 volts, D.C. 55° F. and 70% relative humidity.

Both types will be available shortly and samples will be sent on request.

★ *Supplied with standard letterings in quantities subject to a special quotation.*

BELLING & LEE LTD
CAMBRIDGE ARTERIAL RD., ENFIELD, MIDDX., ENGLAND

POINTERS TO SUPREMACY

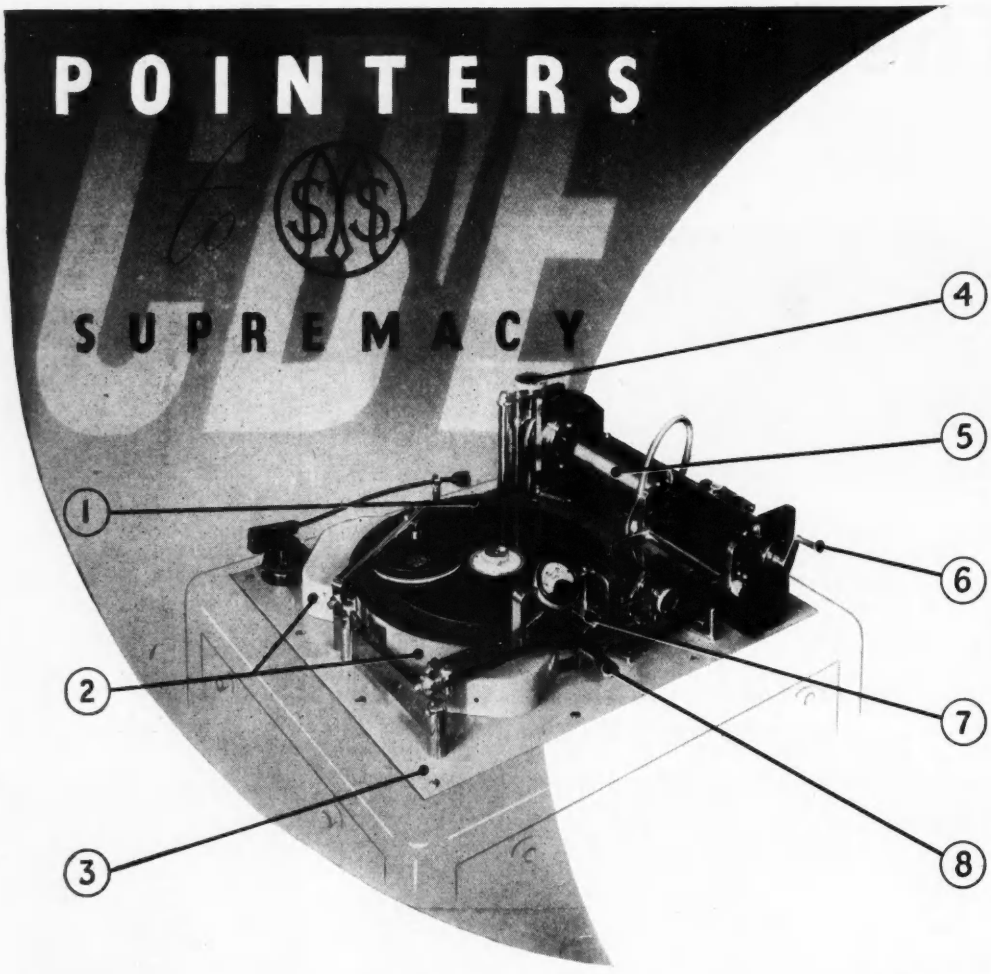

DIRECT RECORDING ON DISK

Some points about the CB/E which have made this machine the considered choice of many discriminating broadcasting concerns throughout the world

(1) **HEAVY CAST IRON TURNTABLE, accurately balanced, ensures freedom from 'wow'.**

(2) **TWIN DUAL SPEED FRICTION DRIVES designed to reduce vibration and ground noise to a minimum.**

(3) **ROBUST MILD STEEL BASE PLATE ¼" thick ensures rigidity, stability and freedom from vibration.**

(4) **GROOVE SPACING CONTROL gives continuous adjustment of pitch when cutting outside/in or inside/out.**

(5) **GROUND STEEL LEADSCREW HOUSING TUBE provides a generous cutterhead arm bearing free from side-play.**

(6) **HAND OPERATED TRAVERSING CONTROL provides easy scrolling off and scrolling on.**

(7) **PATENTED ELECTRO MAGNETIC CUTTERHEAD with built in equaliser, possessing exceptionally stable characteristics.**

(8) **CHANGE SPEED LEVER provides instantaneous change to either 78 r.p.m. or 33⅓ r.p.m.**

Full details and technical data on request.

M·S·S · RECORDING COMPANY LTD

POYLE CLOSE · COLNBROOK · BUCKINGHAMSHIRE · TELEPHONE · COLNBROOK 87 & 115

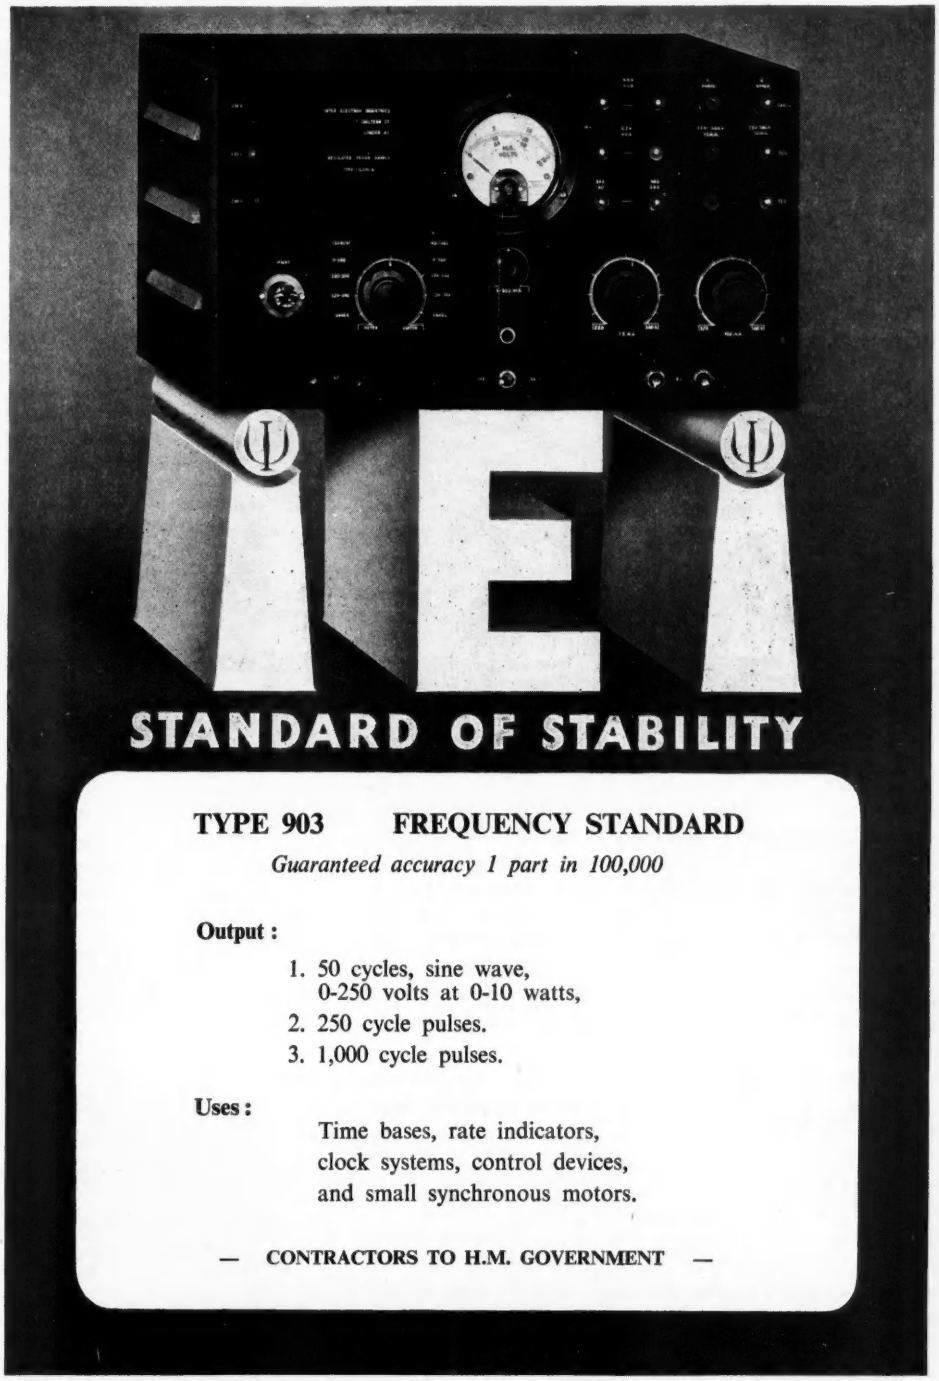

TYPE 903 FREQUENCY STANDARD

Guaranteed accuracy 1 part in 100,000

Output :

1. 50 cycles, sine wave, 0-250 volts at 0-10 watts,
2. 250 cycle pulses.
3. 1,000 cycle pulses.

Uses :

Time bases, rate indicators, clock systems, control devices, and small synchronous motors.

— CONTRACTORS TO H.M. GOVERNMENT —

INTER ELECTRON INDUSTRIES, 7 CHILTERN STREET, LONDON, W.1.

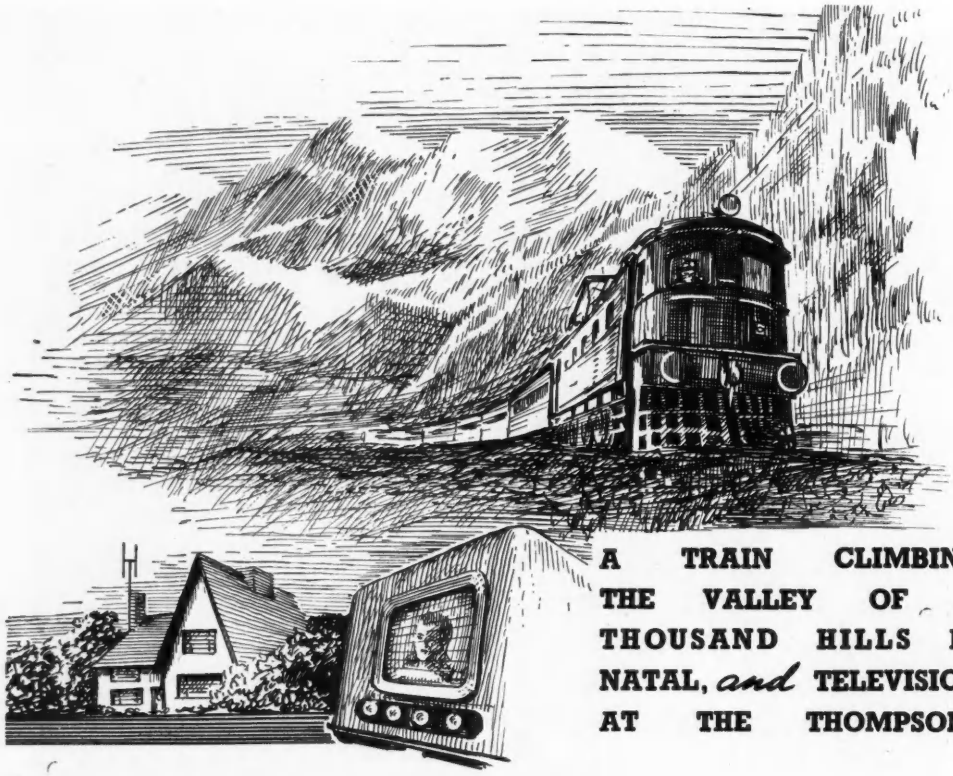

A TRAIN CLIMBING THE VALLEY OF A THOUSAND HILLS IN NATAL, *and* TELEVISION AT THE THOMPSONS

From Durban to Pietermaritzburg the State Railway climbs six thousand feet above sea level through one of the most majestic valleys in the Union–The Valley of a Thousand Hills. The giant electric engines haul their long trains steadily upward, winding and twisting through the mountain passes in the shimmering sunlight, or flashing like comets through the moonlit brilliance of a tropical night against a background etched in silver and ebony.

And far away in England Mrs. Thompson draws the curtains against the foggy drizzle of a November evening and settles down in the firelight to look in at musical comedy radiated from Alexandra Palace.

Trains, Television, and the clock synchronising time with the pulse of an alternating current, all owe a major part of their smooth functioning to Porcelain.

From the mighty surge of thousands of kilowatts, to the minute whispering of microvolts, electricity insulated by porcelain goes about its business in safety. Through tiny tubes, across giant insulators, flexible in fishspine beads, on starkly terminating in complicated die-pressed bases, the myriad electrical energies that help to make the modern world go round, travel safely insulated by Porcelain.

TAYLOR, TUNNICLIFF PORCELAIN

TAYLOR, TUNNICLIFF & CO. LTD. *Head Office*: EASTWOOD · HANLEY · STAFFS · *Stoke-on-Trent 5272-4*
London: 125 HIGH HOLBORN, W.C.1. *Holborn 1951.* *Factories at*: *Hanley, Stone and Longton, Staffs.*

HIGH QUALITY REPRODUCTION

"FIFTY and THIRTY WATT" CINEMA AMPLIFIERS as illustrated for single or double P.E.C. input with separate adjustable bias. Full range of tone controls to suit all needs with built-in Exciter Supply if required.
PRICES range from **34½ gns.** to **42½ gns.**





TYPE C.P. 20A AMPLIFIER

For AC Mains and 12 volt working giving 15 watts output, has switch change-over from AC to DC and "Stand-by" positions. Consumes only 5½ amperes from 12 volt battery. Fitted with mu-metal shielded microphone transformer for 15 ohm microphone, provision for crystal or moving iron pick-up with tone control for bass and top. Outputs for 7.5 and 15 ohms. Complete in steel case with valves.
PRICE **£28.0.0.**

FOUR-WAY ELECTRONIC MIXER



This unit has 4 built-in balanced and screened microphone transformers, normally of 50-30 ohms impedance. It has 5 valves and selenium rectifier supplied by its own built-in screened power pack, consumption 20 watts. Suitable for recording and dubbing, or large P.A. Installations since it will drive up to six of our 50 watts amplifiers whose base dimensions it matches. The standard model has an output impedance of 20,000 ohms or less, and any impedance can be supplied to order. PRICE **£24.0.0.**



OTHER MODELS IN OUR RANGE OF AMPLIFIERS

"SUPER-FIFTY WATT" - - - - - - - - PRICE **36½ gns.**
"THIRTY WATT" - - - - - - - - - - „ **30½ gns.**
"10-15 WATT RECORD REPRODUCER" „ **25½ gns.**

These are fitted in well ventilated steel cases with recessed controls, as illustrated

Full details upon request
EXPORT ENQUIRIES INVITED

VORTEXION LIMITED, 257-261 THE BROADWAY, WIMBLEDON, LONDON, S.W.19.

Telephones: LIB 2814 and 6242-3 **Telegrams: "Vortexion Wimble, London"**

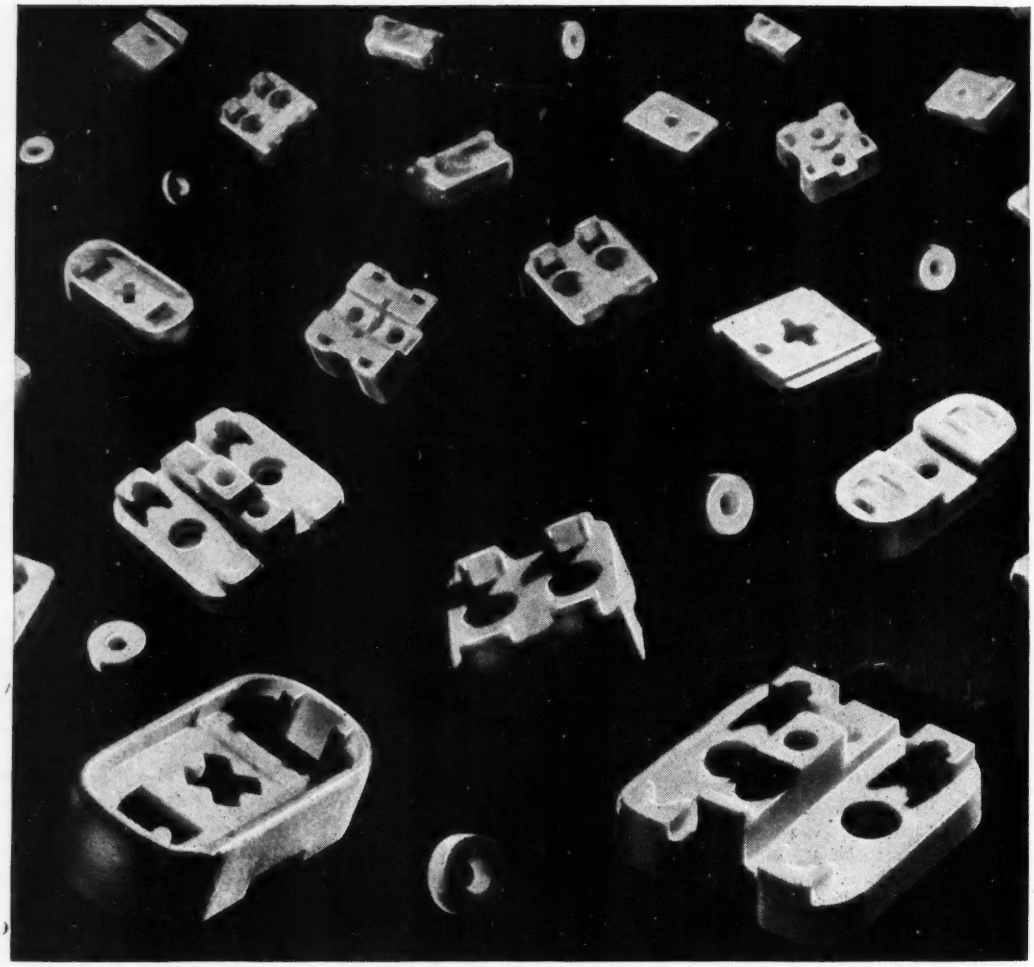

CERAMICS

FOR TRIMMER CONDENSERS
and all radio components
FREQUENTITE – FARADEX – TEMPRADEX

STEATITE & PORCELAIN PRODUCTS LTD.

Stourport on Severn, Worcestershire Telephone: Stourport 111 Telegrams: Steatain, Stourport

S.P.S1

An achievement of some magnitude in diminutives

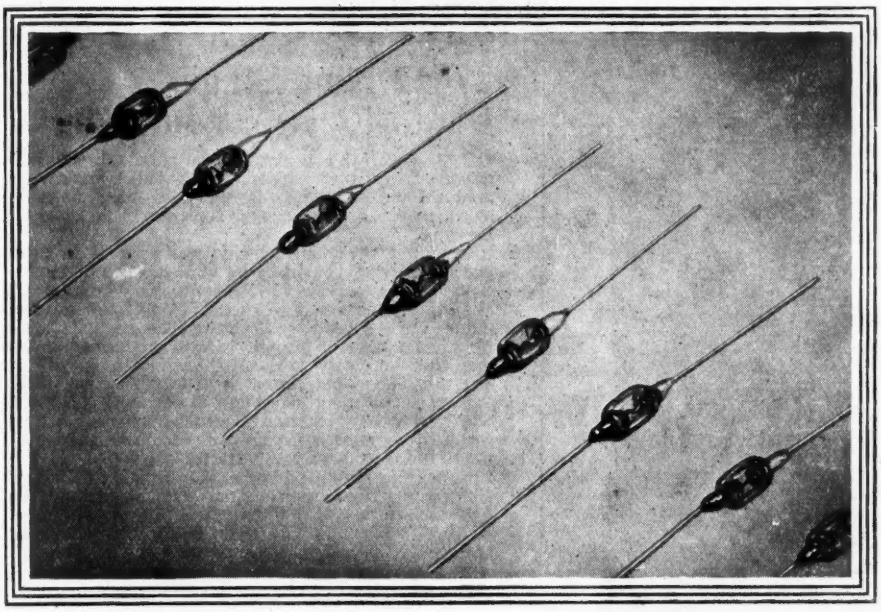

The new

G.E.C.

Germanium Crystal Rectifiers

Designed for soldering into circuits

1. Provides a high frequency Diode requiring no heating power.
2. Very small in physical size.
3. Of low forward and high reverse impedance.
4. Extremely low shunt capacitance — only 1PF.
5. So constructed as to give a unit of high stability and consistency.
6. Outstanding in its property to resist severe mechanical shock or vibration.
7. Indefinitely long life.

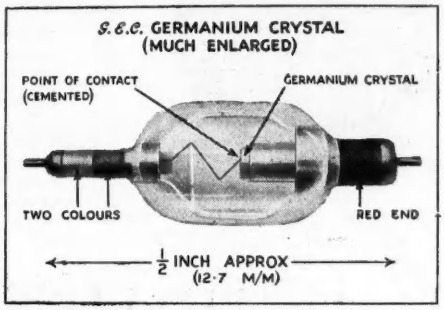

The General Electric Company Ltd. welcomes, and will give sympathetic consideration to enquiries to meet specialised requirements and specific circuit applications. Write and ask for particulars of types available to Osram Valve and Electronics Dept., Magnet House, Kingsway, London, W.C.2.

THE GENERAL ELECTRIC CO. LTD., MAGNET HOUSE, KINGSWAY, W.C.2.

D

VALVES For SPECIAL PURPOSES

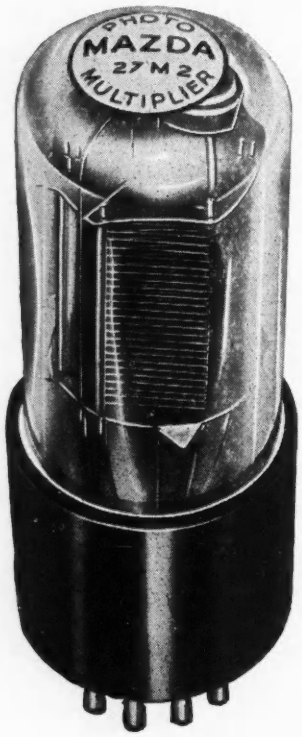

27M2 Nine Stage Photo-Electric Multiplier

The Mazda 27M2 is a high vacuum photo-cell with high response in the visible region. The photo-electric current produced at the cathode is multiplied many times by secondary emission occurring at successive cathodes within the valve.

It is capable of multiplying very small currents produced under weak illumination by an average value of 250,000 times, when operated at 80 volts per stage. When operated at an overall voltage of 600 volts, i.e., 60 volts per stage, followed by a single stage D.C. amplifier, it is suitable for the amplification of changes in cathode current greater than 10^{-14} amperes.

The resultant output current is a linear function of the exciting illumination, under normal operating conditions. Since secondary emission occurs simultaneously, the frequency response is flat up to the frequencies at which transit time becomes a limiting factor.

Because of its sensitivity, low noise level, low dark current and freedom from distortion, the 27M2 may be used for light-operated relays, for film scanning, facsimile transmission, in scientific research involving low light levels, and in many applications where its small size is an advantage.

NOTE.—The 27M2 is similar to the 27M1 except for the wider tolerances on the anode dark current which necessitates a lower anode supply voltage, with a resulting reduction in the current amplification to approximately one quarter of that obtainable from the 27M1.

PRICE £12.0.0 (provisional)

TYPICAL OPERATION

Overall Voltage ..	800 v.
*Sensitivity	2 A/lumen
Spectral Range	3,300—6,500 Å.

**The sensitivity is on the basis of a lamp colour temperature of 2700° K and a light spot area of 3mm. 15mm. The tube is adjusted to a position of maximum sensitivity.*

DIMENSIONS

Max. Overall Length (mm)	94.0
,, Bulb Diameter (mm)	28.5
,, Base Diameter (mm)	33.4
Light Centre from Seat (mm)	49.2±2.4

It is recommended that the bleeder current in the potentiometer providing the secondary cathode voltages should be of the order of 10 times the maximum working current output of the tube.

EDISWAN

MAZDA

RADIO VALVES AND CATHODE RAY TUBES

THE EDISON SWAN ELECTRIC CO. LTD., 155 CHARING CROSS ROAD, LONDON, W.C.2

RA.181

tailor-made

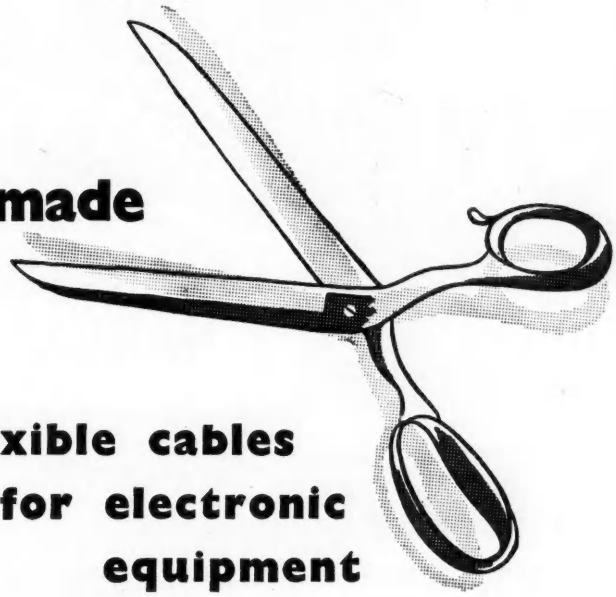

flexible cables for electronic equipment

If you need special multi-unit low-loss cables for electronic equipment—let us design and manufacture them to your requirements. They may include coaxial, twin, quad and small power or control cores in any combination.

BICC can offer you specialised production facilities for this work, as well as the services of skilled engineers who have tailor-made low-loss cables for all current requirements.

Why not take advantage of this opportunity? Write to-day and let us assist you with your problems.

Cables on right are examples which have been designed and manufactured by BICC to meet specialised needs.

Polythene-insulated P.V.C. sheathed multicore cable with microphone and control cores for film studio use.



Multicore polythene-insulated and sheathed television camera cable. Overall diameter 0.5 inches.

P.V.C. sheathed multicore polythene-insulated flexible television camera cable. Overall diameter 0.8 inches.

B.I. Callender's

multi-unit LOW-LOSS CABLES

BRITISH INSULATED CALLENDER'S CABLES LIMITED
NORFOLK HOUSE, NORFOLK STREET, LONDON, W.C.2

SEI serves

THE INSTRUMENT MANUFACTURER

PHOTOCELLS

Illustrated here are three standard types, but S.E.I. Photo-cells can be supplied mounted or unmounted in other sizes to meet special individual specifications.

Make sure you always use S.E.I. Photo-cells

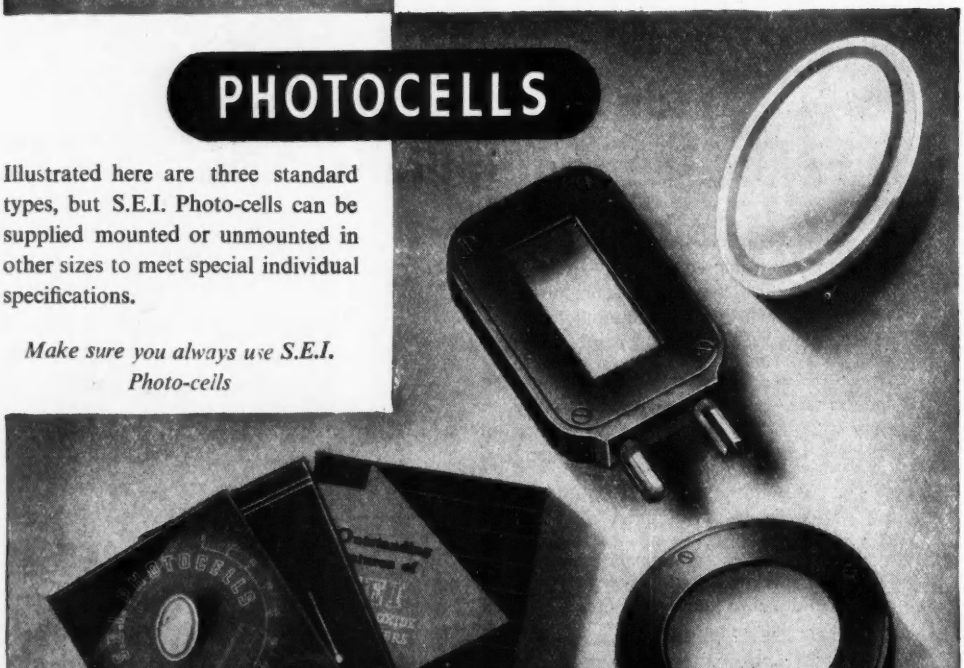

For Literature & Technical Information write to:-

SALFORD ELECTRICAL INSTRUMENTS LTD.

PEEL WORKS · SILK STREET · SALFORD 3 · LANCS · ENGLAND

A subsidiary of THE GENERAL ELECTRIC CO. LTD. OF ENGLAND

Electronic Engineering

EDITORIAL, ADVERTISING AND PUBLISHING OFFICES, 28, ESSEX STREET, STRAND, W.C.2.

TELEPHONE CENTRAL 6565 (10 LINES) *MANAGING EDITOR:* H. G. FOSTER, M.Sc., M.I.E.E. *TELEGRAMS:* LECTRONING, ESTRAND, LONDON

Monthly (published last Friday of preceding month) 2/- net.

Subscription Rate: (Home or abroad) Post Paid 12 months 26/-, or $ 3.75 (U.S.).

Vol. 22. No. 269. July, 1950

CONTENTS

An Echo-Free Room 258

The Single Side-Band System of Radio Communication 259
By H. D. B. Kirby, M. A.

Microwave Lenses—Part IV 264
By J. Brown, M.A. and S.S.D. Jones, M.A.

"Autoselector" Automatic Tuning Mechanism 268

Noise in Variable Resistors and Potentiometers 269
By Francis Oakes

Results on a Midlands "Televisor" 274

The Solovox 275
By Alan Douglas

The Cable Transformer 279
By F. J. Charman

A Method for the Measurement of Capacitance and Resistance 280
By G. T. Baker, M.Sc.

Time Base Expansion and Compression Circuits 284
By D. M. MacKay, B.Sc.

The Videograph 285

An Improved Insulation Resistance Bridge ... 286
By A. F. Boff, B.Sc.

A Sawtooth Generator for Oscilloscopes ... 290

Notes from the Industry 291

Electronic Equipment 292

Book Reviews 294

Television Aerials

CONSIDERABLE uncertainty has existed for some time past as to the rights of landlords and tenants in the matter of erection of outdoor television aerials, and this uncertainty has been increased by recent action on the part of several local councils in banning aerials from their housing estates.

The reasons behind these restrictions do not appear to have been based on very sound argument, and more than welcome, therefore, is the publication this month of the booklet "Television Aerials—Outdoor or Indoor?" issued jointly by the Radio and Electronic Component Manufacturers and the British Radio Equipment Manufacturers' Association.

This admirably prepared booklet is intended "primarily for the benefit of municipal authorities and other property owners whose judgement their tenants may have to accept for the choice of television aerial they may employ".

Apart from architectural objections, the technical arguments are put forward mainly on the grounds of risk of damage to property—usually the chimney stack—and the increased hazards of lightning. The booklet states, however, that television aerials are made by reputable manufacturers who have gained sufficient experience to prove that the erection of an outdoor aerial can actually strengthen the chimney stack and that the increased lightning danger is negligible.

The booklet goes on to show that, assuming that the restrictions on the erection of outdoor aerials can now be removed, there are still a number of factors to be considered in the selection of the most suitable type, and that the choice of the familiar "H" type in strong signal areas can be (and often is) based on sounder reasons than mere "snob" value.

If television is to be as much a part of our everyday life as the broadcast service, it is, perhaps, not inappropriate to consider the possibilities of supplying that service by other than the existing methods.

One possible method is, of course, by the use of microwaves, which has the advantage of requiring smaller receiving aerials, but adequate coverage, particularly in a built-up area, would be problematical; reflexion troubles from buildings would be increased and interference might not necessarily be reduced.

The alternative is perhaps the relaying of television by means of cable, and this method raises a number of interesting possibilities.

There is only a single programme at the moment, a second programme is not due for several years to come and the prospects of alternative or commercial transmissions are so remote as to be ignored. The viewer, therefore, is compelled by the very nature of things to be restricted in his choice of programme and he cannot roam the ether in search of other programmes. Since we are to be tied to a single source of programme, it might not seem so far fetched as it first appears to relay television (and radio) programmes by cable. It might, at the same time, remove the bugbear of direct reception—namely, interference, particularly from motor cars. Nor need the cost be excessive if carried out on a large enough scale.

No one can pretend that the sight of all these aerials perched on our roofs is anything but an eyesore, as a train journey through our suburbs will demonstrate.

When we have reached that particular aspect of our all-electric all-atomic energy era in which all our electricity, radio, telephone and television services (and gas, too, if still required) are piped into our homes by a single coaxial cable, aerials should be as much an anachronism as the chimneys to which they are attached.

AN ECHO-FREE ROOM

at G.E.C. Research Laboratories, Wembley

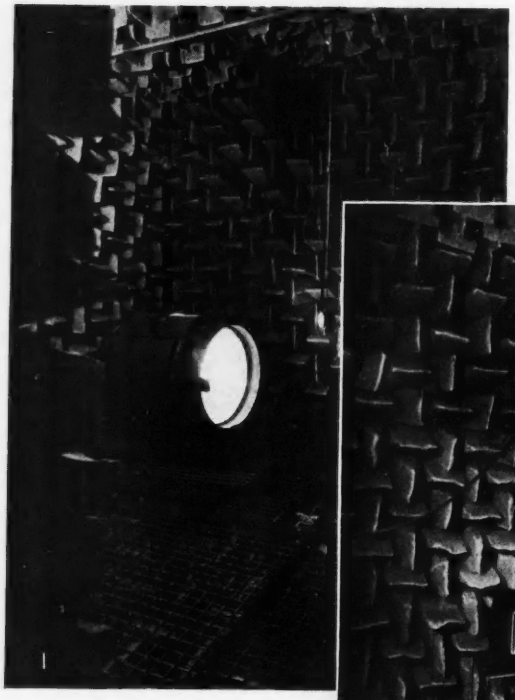

1.—Measuring the arc-noise from a G.E.C. 150 ampere double-negative high intensity studio arc lamp

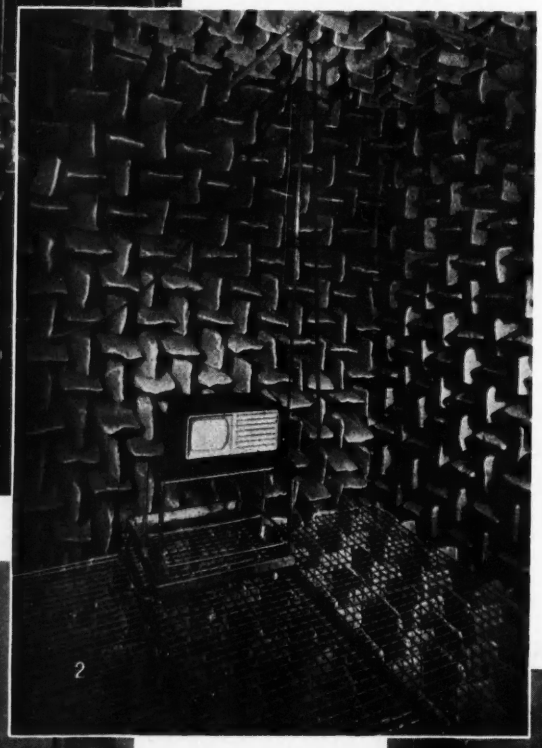

2.—Measuring the overall audio fidelity of a G.E.C. television receiver. This illustration shows the sound transparent floor particularly well

3.—Outside wall of the room, showing the construction of the door hinges which allow initial parallel motion of the door. The handle below the hinges is used for rotating the turntable within the room

4.—Side view of partly-open door, showing how the "Fibreglass" wedges are held in position in a wire mesh

The Single-Sideband System of Radio-Communication

By H. D. B. KIRBY, M.A.

(Late of Standard Telephones & Cables, Ltd., London)

THIS article describes the single-sideband system of communication and shows the advantages it possesses over the normal double-sideband method of operating a radio link.

The method was invented by J. R. Carson and used for several years for wire transmission before it was applied to radio. It was used on the first transatlantic telephone circuit, which operated on long waves, and in 1930-31 tests carried out between Paris and Madrid, and Madrid and Buenos Aires showed that it could be applied with equal success to short waves. Five years later a single-sideband short wave circuit was opened between London and New York. Now a large number of point-to-point radiotelephone links throughout the world are being changed over from D.S.B. to S.S.B. operation and the use of the system for the long-distance ship-shore services has commenced with the installation of S.S.B. equipment in the Cunard White Star liner "Caronia."

What is S.S.B.?

In order to appreciate what the single-sideband system involves it is necessary to consider first what happens when a speech wave is used to modulate a radio-frequency carrier. To take a simple example let us suppose that at some particular time the speech wave consists of a 1,000 c/s. sine wave, together with its second harmonic (2,000 c/s.) at half the amplitude. Two cycles of such a wave are shown in Fig. 1 (a, b and c). If this is used to modulate a carrier of 10 kc/s. (d) by the ordinary method of amplitude modulation the waveform shown at (e) is produced. Without going into mathematics it is possible to state that this waveform may be analysed into the following sine waves: 8 kc/s., 9 kc/s., 10 kc/s., 11 kc/s. and 12 kc/s. The first two are known as the lower sideband, the third as the carrier and the last two as the upper sideband. The amplitudes of the components of the sidebands are proportional to the components of the original modulating signal, so that in this case the 8 kc/s. sine wave which corresponds to the original 2,000 c/s. has half the amplitude of the 9 kc/s. which corresponds to the original 1,000 c/s. Similarly, the 12 kc/s. has half the amplitude of the 11 kc/s. When this wave is demodulated in the ordinary receiver a large number of frequencies are produced, among them the original 2,000 c/s. and 1,000 c/s.

It will be appreciated that the carrier frequency, amplitude and phase remain the same whatever the modulation and that it therefore plays no part in conveying intelligence. It is, however, necessary for the ordinary process of demodulation. If the 10 kc/s. carrier is removed from the waveform shown at (e), the wave shown at (f) is produced. If this is applied to a square-law detector the audio-frequencies which are produced will be twice those in the original signal. If it is demodulated by the addition of a locally generated carrier it is necessary for this carrier to be not only exactly the same frequency as the original but also the same phase. This type of signal, therefore, though very much more easily produced than the single sideband signal is of little use for communication.

However, since there are two sidebands present in the waveform shown at (f) the information is in effect being sent twice, and it is therefore possible to remove one of the sidebands. This will give a waveform as shown at (g). This can be demodulated by mixing with a locally generated carrier which must be very nearly the same frequency as the original carrier, but need not be in phase with it.

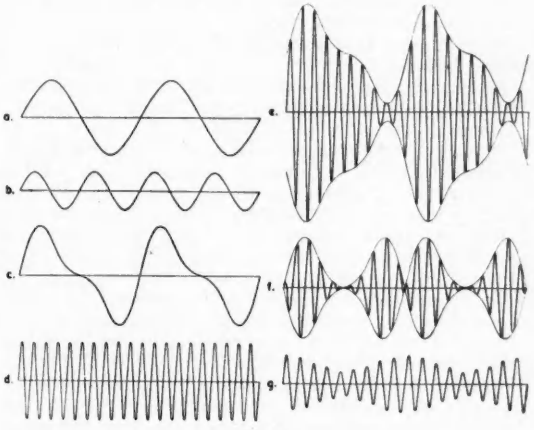

Fig. 1.

Waveforms: (a) 1,000-c/s note. (b) Second harmonic of a. (c) Combination of a and b. (d) 10-kc/s carrier. (e) Double-sided signal. (f) Double-sideband signal with carrier suppressed. (g) Single-sideband signal

Advantages

The advantages of using the S.S.B. system may be summarized as follows:

(1) Improved signal-to-noise ratio at the receiver for a given transmitter power.

(2) Less bandwidth occupied per channel.

(3) Freedom from the distortion normally caused by selective fading and multi-path propagation.

One reason for the improved signal-noise ratio follows from the explanation of the nature of the S.S.B. signal. It can be shown that if a double-sideband transmitter is fully modulated by a sine wave signal the peak amplitude of the output is twice that of the unmodulated carrier. The maximum voltage of each sideband is therefore one-quarter of the peak amplitude of the output wave. If single-sideband operation is used on a similar transmitter, since the limit of output is normally the

peak emission of the power amplifier valve, the maximum value of the sideband is the same as that of the total output, or four times that of each sideband in the double-sideband transmission. At the receiver both the sidebands of the double-sideband transmission contribute to the output of the demodulator, so that the voltage output from the single-sideband receiver is twice that from the double-sideband receiver. The power output from the receiver is therefore four times as great, which is equivalent to an improvement of signal-to-noise ratio of approximately 6 db.

The second advantage of the single-sideband method of transmission (less bandwidth occupied per channel) also follows from the preceding discussion. In our example the double-sideband transmitter generated frequencies between 8 and 12 kc/s., whereas the single-sideband transmitter generated only 8 and 9 kc/s. or 11 and 12 kc/s. There will be similar results, whatever the modulating frequencies so that less space in the radio frequency spectrum is occupied by a S.S.B. transmission. In these days when the utmost economy in the use of frequency space is essential, this is a very important advantage. Apart from pulse code modulation, the practical use of which may be some years away, the single-sideband system is more economical of bandwidth than any other.

Arising out of this reduction in bandwidth, there is also a further possible gain in signal-to-noise ratio at the receiver. Since a smaller band of frequencies is being transmitted it is possible to use filter circuits in the R.F. and I.F. stages of the receiver which have a narrower pass-band than that used in a D.S.B. receiver. As a result the random noise picked up with the signal is reduced in proportion, since this noise may be assumed to be distributed evenly through the frequency spectrum. Thus, if the pass-band of the I.F. transformers of a receiver be halved the random noise energy passed to the audio-stages will also be halved.

Thus the signal energy is quadrupled and the noise energy is halved, resulting in a total improvement in the signal-to-noise ratio of eight times or 9 db.

These figures assume sine-wave modulation, whereas the normal signal will be a complex wave. However, the actual operation of commercial S.S.B. circuits has shown substantial agreement between the figures obtained in practice and those predicted by theory. Comparative tests on long-distance circuits also show a considerable improvement in quality with the S.S.B. system, which is due to the absence of selective fading effects. The reason for this can be understood from a consideration of the causes of selective fading. Fig. 2 shows a transmitting Station A and a receiving Station B outside ground-wave range. Signals from A are therefore received at B after one or more reflexions from the ionosphere. In general the various possible paths between the stations will be of different length and consequently the signals received there will not necessarily be in phase with each other. When the signals arrive out of phase they tend to cancel each other and cause the effect generally known as fading. This in itself may not necessarily be very important, since changes of level at the receiver can be overcome by automatic gain control systems. Such systems can, however, be effective only when the carrier and sidebands retain their original relative strengths. Unfortunately, since the bending effect of the ionosphere is dependent on frequency the different components of the transmitted wave will come back to the earth at different angles. For instance, it is possible that at some particular moment the frequencies in the lower sideband might follow the path indicated by the full lines in Fig. 2 and the upper sideband might follow the broken lines. In this case the lower sideband reaches the receiver after two reflexions and the upper sideband after one reflexion. Now the audio frequency output of a demodulator to which a D.S.B. signal is applied is made up of two parts for each audio frequency: one produced by the upper sideband beating with the carrier and the other produced by the lower sideband beating with the carrier. And it is one of the requirements for distortionless transmission that the phase-shift between the carrier and each frequency in one sideband should be equal to the phase-shift between the carrier and the corresponding frequency in the other sideband. This requirement is normally

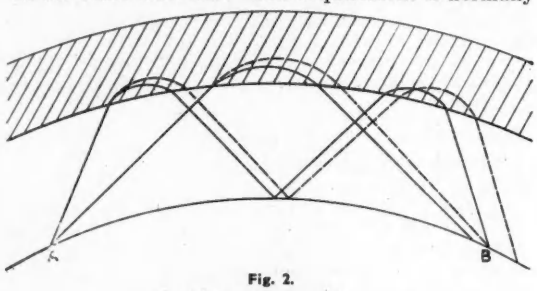

Fig. 2.
Multi-path propagation

fulfilled, but when the two sidebands arrive by different paths the phase-shift will no longer be proportional to frequency, and the relative phase between the audio outputs contributed by each sideband will vary with the audio frequency.

In the single-sideband system on the other hand the second component for each frequency is missing in the detector output, so that this form of delay distortion cannot occur.

Another form of selective fading caused by multi-path propagation occurs when the carrier fades out and leaves most of the two sidebands at their normal amplitude. This causes the detector output to consist largely of second harmonics of the components of the original signal wave caused by the beating of one set of sidebands against the other. This form of distortion again cannot occur in S.S.B. systems, since only one sideband is present and the carrier is either locally generated at the receiver or else is amplified separately and recombined with the sideband frequencies in the demodulator.

When non-linear distortion is severe in a D.S.B. system intelligibility will be very low, and especially if a privacy system is in use the circuit may be unworkable. Freedom from this type of distortion is one of the chief reasons why S.S.B. working is preferred for long-distance radiotelephone circuits.

Transmission

There are a number of possible ways in which the single-sideband signal can be produced, but we do

not yet know how to produce it directly. Instead it is necessary to produce a D.S.B. signal and then remove the unwanted components.

Removing the carrier is comparatively simple since the familiar balanced modulator can be used. The circuit of such a modulator is shown in Fig. 3. The carrier is applied to the grids of the two valves in parallel and the signal is applied in push-pull. A transformer with a centre-tapped primary is used in the anode circuit and it can be seen that the carrier will be balanced in the two halves of this winding and therefore will not appear at the secondary. The two sidebands on the other hand will add in this transformer and produce a waveform similar to that shown in Fig. 1(f).

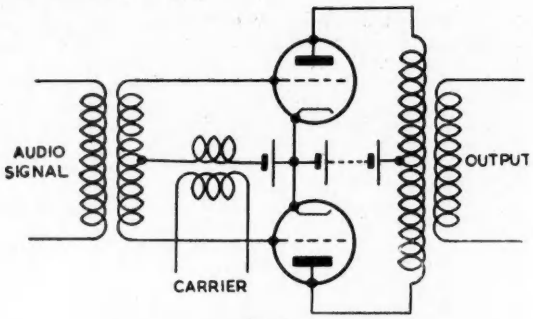

Fig. 3.
Simplified schematic of balanced modulator

It is possible to arrange similar circuits so that one sideband is cancelled out, but it is difficult to make the balance hold over the audio range required. A more satisfactory way in the present state of the art is to use crystal filters to suppress the unwanted sideband. In the example shown in Fig. 1 it would be comparatively easy to design a suitable filter since, assuming that the lower sideband is to be suppressed, the filter is only required to pass frequencies of 11 kc/s. and 12 kc/s., and to suppress frequencies of 8 kc/s. and 9 kc/s. Thus it is not necessary for the characteristics of the filter to have particularly steep sides. If, however, it is desired to pass a band of frequencies extending down to 100 c/s. on a carrier of 10 Mc/s., the filter will have to discriminate between frequencies of 9.9999 Mc/s. and 10.0001 Mc/s. It can be seen that the design of such a filter presents much greater difficulty. Therefore, when high-frequency carriers are used it is necessary to use a slightly more complicated circuit arrangement in order to simplify the design of the filters.

The block diagram of a simple single-channel single-sideband transmitter, shown in Fig. 4, illustrates the method normally adopted. It can be seen that the single-sideband signal is produced at a comparatively low frequency and is then converted to the higher frequency required for radiation.

The line amplifier and volume indicator is provided to enable the audio input to the first modulator to be set to the correct level. This modulator is of the balanced type shown in Fig. 3, the audio-signal being applied to the grids of the two valves in push-pull and the output of a 100 kc/s. oscillator in parallel. The output of this modulator therefore consists of two sidebands, the upper being 100 kc/s. plus the band of audio frequencies and the lower being 100 kc/s. minus the audio frequencies. Either one of these is selected as required by means of the crystal filters, one of which is designed to pass a band of frequencies 100.2-106 kc/s. and the other 94-99.8 kc/s.

As will be seen in connexion with the receiver, it is convenient to have a small residual carrier in the received signal. As the 100 kc/s. component is almost completely suppressed in the balanced modulator, it is reintroduced at the required level after the filters.

The signal is then mixed with the output of a 3 Mc/s. oscillator in the second modulator which is again of the balanced type. Two sidebands are produced in the output of this modulator, one comprising a band of frequencies in the region of 3.1 Mc/s., the other in the region of 2.9 Mc/s. These two bands are sufficiently widely separated for the 2.9 Mc/s. band to be suppressed by means of ordinary tuned circuits.

The 3.1 Mc/s. signal after amplification is mixed with the output of a variable R.F. oscillator to produce the required operating frequency. When the operating frequency is below 10 Mc/s. it is normal practice to make the oscillator frequency 3.1 Mc/s. above the operating frequency; when it is above 10 Mc/s. the oscillator frequency is 3.1 Mc/s. below the operating frequency.

Thus if the upper sideband is being used an audio signal of 1,000 c/s. is first translated to 101 kc/s. and then to 3.101 Mc/s. If the final carrier frequency is 5 Mc/s., this is then converted to 4.999 Mc/s.; if the final carrier frequency is 15 Mc/s., it is converted to 15.001 Mc/s.

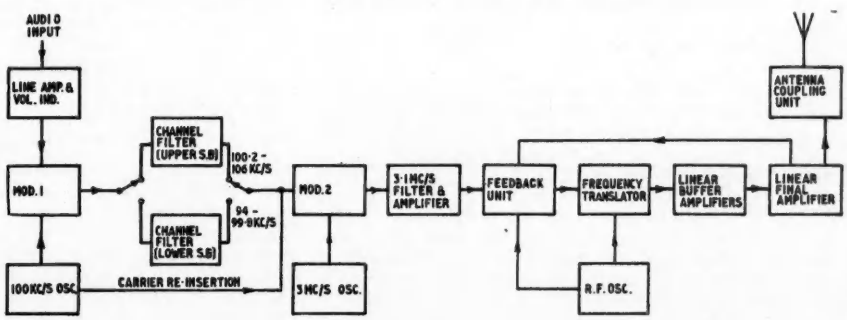

Fig. 4.
Block schematic of simple S.S.B. transmitter

The output of the third modulator (or frequency translator) valve comprises the required single-sideband signal, but its power at this point is insufficient for radiation. Since the signal is modulated, linear amplifiers have to be used to increase the power to that required for feeding the aerial. To ensure good linearity negative feedback is used between the output stage and the frequency translator.

Reception

The chief problem in a single-sideband receiver is the provision of a suitable carrier to demodulate the received signal. The frequency of this carrier must be within 10-15 cycles of the carrier which was suppressed at the transmitter. Naturally the higher the operating frequency the more difficult it is to keep down the frequency difference between the two carriers, and at the normal frequencies used it is not practical to maintain two independent oscillators within these limits. At 1 Mc/s., for instance, the frequency of a crystal oscillator may vary by as much as ± 10 c/s. There is thus a possible variation of 20 c/s. between two similar oscillators even at this frequency. In addition the grinding accuracy of a crystal is not usually better than 100 c/s. It is therefore normal practice to transmit a pilot carrier at a very low level, to amplify this separately at the receiver and use it either as the demodulating carrier (re-constituted carrier) or to control the frequency of a local oscillator (locally-generated carrier).

The block diagram of a simple S.S.B. receiver is shown in Fig. 5. The signal is first amplified at radio frequency and then mixed with the output of a tunable oscillator, whose frequency differs by 3.1 Mc/s. from that of the received signal. For frequencies below 10 Mc/s. it is tuned above the incoming signal, and for frequencies above 10 Mc/s. below the incoming signal. In this way the correct relationship between the audio frequencies is maintained.

The output from the first frequency-changer is amplified at 3.1 Mc/s. and then mixed with the output of a 3 Mc/s. oscillator. The 100 kc/s. modulation product is selected and after amplification is applied to a crystal filter which passes either the band 94-99.8 kc/s. or the band 100.2-106 kc/s. The output from the filter after amplification is mixed with the output of a 100 kc/s. oscillator so that the original audio frequencies are produced. To ensure that these audio frequencies are the same as those transmitted, it is necessary that the frequency difference between the outputs of the filter and the 100 kc/s. oscillator shall be the same as that between the carrier and the sideband in the transmitted signal. To achieve this the output of the 100 kc/s. amplifier is passed to a narrow crystal filter which is peaked at 100 kc/s., so that it selects the carrier which was transmitted at a low level. After amplification the frequency of this reconstituted carrier is compared with that of the 100 kc/s. oscillator. Any difference between these frequencies produces a voltage which is used to vary the frequency of the 3 Mc/s. oscillator until this voltage is reduced substantially to zero. Various methods of automatic frequency control are used involving either reactance tubes or motor-driven trimmers. The latter are usually preferred.

Since the carrier is transmitted at a constant level, whereas the sidebands are continually varying, the former is used for the production of the automatic gain control voltage.

Under certain conditions good results may be obtained by using the output of the carrier filter and amplifier instead of the locally-generated 100 kc/s. wave to demodulate the signal.

Examples of Equipment

The simple equipments so far described have been designed for single-channel working, but it is clearly economical to use the two sidebands independently for the transmission of intelligence. Consequently most practical transmitters and receivers are designed for double-channel working.

A number of transmitters and receivers for S.S.B. operation have been developed and manufactured by Standard Telephones & Cables during the last few years. The transmitters have output powers ranging from 300 watts to 40 kilowatts, and the receivers vary in complexity according to the facilities required.

The simplest transmitter in the range has a circuit very similar to the block schematic shown in Fig. 4. It has a frequency range of 4-22 Mc/s. and its output power is 300 watts (peak envelope). It is self-contained and built in a single cabinet measuring 5 ft. 6 in. by 2 ft. 8 in. by 2 ft. 1 in. and weighs approximately 600 lb. A transmitter of this type is installed in the new Cunard White Star Liner "Caronia."

The larger transmitters make use of a drive unit which contains all the circuits required to convert two incoming signals to two sidebands of a reduced amplitude 3.1 Mc/s. carrier, together with monitoring facilities for the output and important points in the circuit.

A 4 kW model is built in a single assembly requiring front access only. An interesting feature

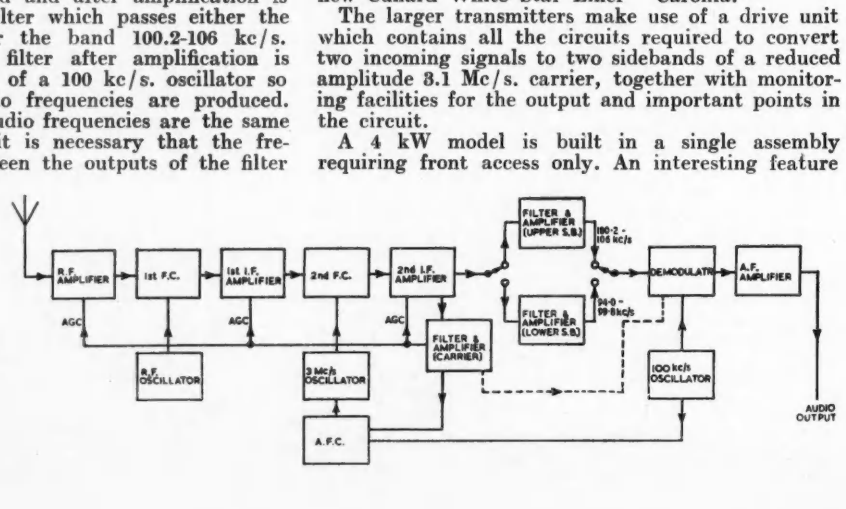

Fig. 5.
Block schematic of simple S.S.B. receiver

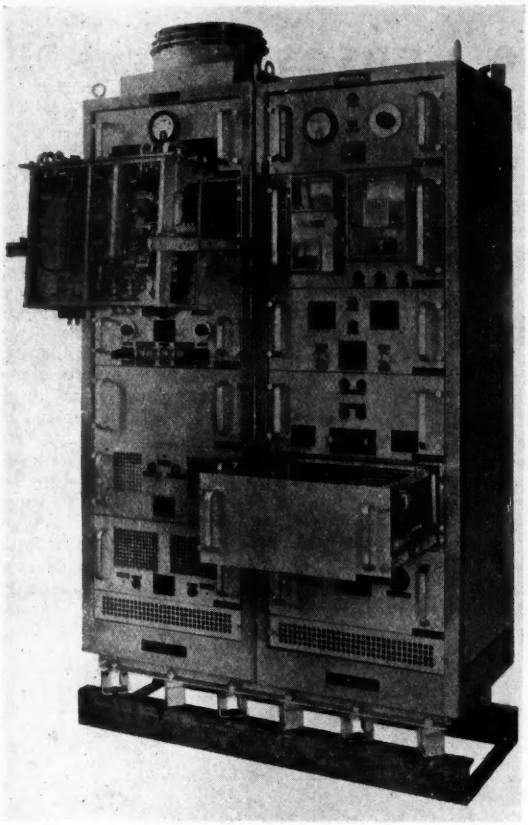

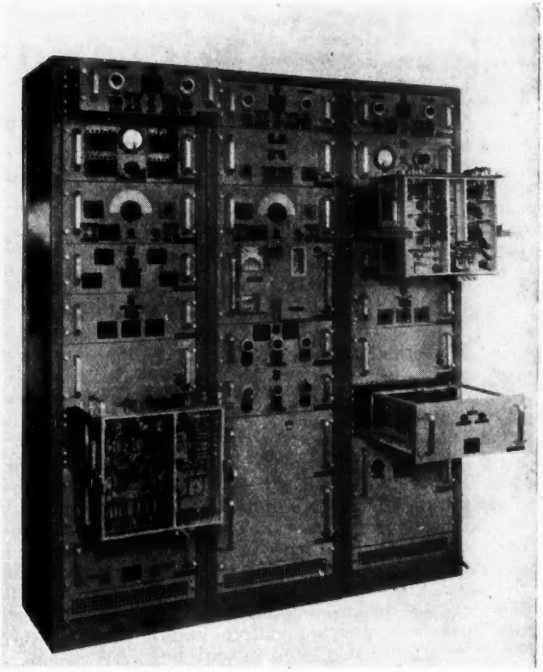

Fig. 6 (*left*).
S.S.B. Receiver as installed in the " Caronia "

Fig. 7 (*right*)
Triple Diversity S.S.B. Receiver type RX.1

is the use of an air-blast cooled pentode output valve. The larger transmitter, together with its cooling plant is built in an enclosure, which can be entered through a door at the side. Two grounded-grid water-cooled valves are used in the final amplifier stage. Negative feedback is used in both models to give a high degree of linearity and reduction of noise and unwanted phase modulation.

The receiver installed in the "Caronia" is shown in Fig. 6 and a more complex one for land operation in Fig. 7. The "Caronia" receiver is designed to provide the best possible facilities consistent with the restriction on size and weight introduced by ship-board operation and may be used for the reception of one audio signal on each sideband. It is continuously tunable over the range 4-25 Mc/s. and motor-driven automatic frequency control is incorporated. The first oscillator is normally crystal-controlled and six crystal positions are provided in a thermostatically-controlled oven.

The receiver shown in Fig. 7 provides full space-diversity reception facilities using three separate aerial systems and receivers. The outputs of the three receivers are combined in such a way that the audio output is derived substantially from the strongest received signal. In this way the effects of fading are very considerably reduced, since it is probable that at any moment a reasonable signal will be picked up by at least one of the aerials.

Conclusion

The advantages of using S.S.B. operation have been discussed above. The chief disadvantages are the increased complexity of some of the equipment required and the comparatively high degree of stability required in power supplies, oscillators, crystal filters and some of the components. Thus the receiving equipment tends to be more expensive than comparable D.S.B. receivers, but against this must be offset the possibility of using transmitters with lower power output. It has been found that these considerations, together with the extra operating time available owing to the higher quality of the circuit, make the S.S.B. system not only theoretically but also practically the most suitable method of operating commercial long-distance telephone links. No reference has been made to telegraph operation, but the audio-frequency signals transmitted may take any form and can therefore comprise one or more voice-frequency telegraph channels. Satisfactory operation has been obtained with six telegraph channels on a single S.S.B. link.

Microwave Lenses

By J. BROWN, M.A., and S. S. D. JONES, M.A.*

Part IV

MICROWAVE lenses are, like their optical counterparts, subject to a variety of defects. The principal defects of optical lenses, or aberrations, as they are usually called, may be conveniently listed as follows:—

(1) Spherical aberration,
(2) chromatic aberration,
(3) coma,
(4) surface reflexions.

Similar aberrations occur with microwave lenses, but because of the differences between optical and microwave lenses, the most important aberrations are not the same in the two cases. The most important property of a microwave lense is generally the gain, and the defect which has the most influence upon this is the last of the above list. Surface reflexions will therefore be discussed in detail in the next section, together with another defect known as spillover, which is usually neglected in optics.



Fig. 27. Movement of the beam caused by moving the feed

In optical lenses spherical aberration arises from the assumptions that such lenses are thin, and that the surfaces may be approximated by sections of spheres. In the calculation of microwave lens contours by the methods described in previous articles, however, no approximate assumptions have been made and so these lenses will be free from spherical aberration, at any rate so long as the lens feed is situated at the design focus. Movements of the feed along the axis will result in some aberration, which shows itself as a curved instead of a plane phase front in the wave emerging from the lens. The permissible movement of the feed before this aberration causes any appreciable deterioration of the radiation pattern is, however, quite large, so that the position of the feed may be preserved to the required degree of accuracy without any mechanical difficulties. In some applications of lenses, it is desired to move the feed off the axis in order to scan the radiated beam over a range of angles: in Fig. 27, for example, if the feed is moved to the position F', the radiation pattern will be such that the direction of the maximum will make an angle α with the lens axis. It follows that the direction of the beam may be altered by moving the primary feed only, the lens itself remaining fixed. It is obviously a much simpler mechanical problem to move only the feed than to rotate the complete system to the required direction. The maximum angle through which the beam may be swung is limited by the spherical aberration, and also by the coma. The scanning properties of microwave lenses will be discussed later in this article.

The only remaining aberration is chromatic, which is the limitation imposed on the range of wavelengths over which the lens may be used. This has already been discussed for each of the dielectrics described in the previous articles and will not be considered further.



Fig. 28. Reflexion at a dielectric interface

Surface Reflexions

One of the most serious defects of a lens is the occurrence of reflected waves, caused by the discontinuities in refractive index at the surfaces. Such reflexions may be studied theoretically,[21] the simplest case being that occurring at the interface between free space and a solid dielectric as shown in Fig. 28. It is assumed that the interface is infinite in extent and that the incident wave is plane polarized. There will be in the dielectric a refracted wave, whose direction is given by Snell's Law, Equation (1), and there will also be a reflected wave. This reflected wave will be in the same direction as if the interface were a perfect reflector. The power reflexion coefficient, R, defined as the ratio of the power reflected from any area of the interface to the power incident on the same area, may be calculated from the boundary conditions which must be satisfied at the interface. These conditions are that the tangential components of both electric and magnetic fields must be continuous across the interface. Two distinct cases arise: if the electric

* Radar Research and Development Establishment, Ministry of Supply.

vector lies in the plane of Fig. 28 the power reflexion coefficient is

$$R_1 = \frac{\tan^2(i - r)}{\tan^2(i + r)} \quad \text{..... (50)}$$

while if the electric vector is normal to the plane of Fig. 28 then

$$R_2 = \frac{\sin^2(i - r)}{\sin^2(i + r)} \quad \text{..... (51)}$$

where i and r are the angles which the directions of the incident and refracted waves make with the normal to the interface. The values of these angles must, of course, satisfy Snell's Law. In the limiting case of normal incidence, both expressions tend to

$$R = \left(\frac{n - 1}{n + 1}\right)^2 \quad \text{..... (52)}$$

The only case when the reflexion coefficient becomes zero occurs when $i + r = \pi/2$. Then $\tan(i + r)$ becomes infinite and so $R_1 = 0$. The value of i for which this happens is known as the Brewster angle, as in optics. The power transmission coefficient T, defined similarly to the reflexion coefficient, has always the value $1 - R$. It may also be shown that the phases of the incident and refracted waves are continuous at the interface. The results of the above paragraph apply only to solid dielectrics, and modifications are necessary before they can be applied to the various artificial dielectrics discussed in previous articles.



Fig. 29. Reflexion from a strip dielectric

Details of the modifications required will only be given here for the cases of strip delay dielectrics and metal plate dielectrics, as these are the only two which have as yet been studied in detail. As was shown in Part II, strip delay dielectrics operate only when the electric vector is perpendicular to the direction of the strips. If the strips lie as shown in Fig. 29, it is natural to suppose that the reflexion coefficient should be given by Equation (50). Such is, in fact, the case, provided that the wavelength used lies in the range for which the refractive index is constant, and that the direction of propagation within the dielectric is nearly normal to the planes of the strips. This case is the one which occurs most frequently in lens design, and other cases have not yet been investigated.

The reflexions from the stack of metal plates which forms the basis of a metal-plate lens have been examined theoretically by Carlson and Heins.[22] Their results are very complicated except in the simplest cases, because of the constraint imposed by the plates on the direction of the refracted wave. The results differ in two important respects from those for solid dielectrics: firstly, for values of the angle of incidence exceeding a certain value, a second reflected wave occurs. This additional reflected wave is caused by the edges of the plates acting as a diffraction grating. The overall transmission coefficient is appreciably reduced when this occurs. Secondly there is a storage field set up at the interface, the effect of which is to cause a phase change at the interface between the incident and refracted waves. This phase change varies from point to point over the surface of a lens and so causes small phase errors. Carlson and Heins have ignored the effect of finite plate thickness in their calculations: it appears that if allowance is made for this plate thickness, larger values of the reflexion coefficient will be obtained. It is therefore important in practice to keep the thickness of the plates in a metal plate lens to the minimum acceptable from the point of view of mechanical strength.

So far only one surface has been considered, whereas lenses have two surfaces. The effect of this upon the nature of the reflexions may be seen by studying the case of the plane sheet of Fig. 30. It will be sufficient to consider a plane wave incident normally on to the sheet, and it may be shown that the reflexion coefficient for this case is

$$R' = \frac{2R(1 + \cos 4\pi d/\lambda')}{1 + 2R\cos 4\pi d/\lambda' + R^2} \quad \text{..... (53)}$$



Fig. 30. Reflexion by a dielectric sheet

where R has the value given in Equation (52)

d is the thickness of the sheet

and λ' is the wavelength measured within the dielectric.

The value of R' oscillates between 0 and $4R/(1 + R)^2$ as the thickness d varies, while the transmission coefficient T will show corresponding oscillations between 1 and $(1 - R)^2/(1 + R)^2$. One complete cycle of this oscillation occurs for each change in d of $\lambda'/2$.

The discussion so far given in this section has assumed interfaces of infinite extent and plane waves. The results may, however, be applied at any point on a lens surface provided that the curvature of the surface is not excessive. In a lens, the position is more complicated than for a simple plane sheet, but a fuller analysis shows that the transmission coefficient of the lens also oscillates from point to point as the lens thickness changes. The mean value at any point is approximately the product of the transmission coefficients of the two interfaces.

The occurrence of reflected waves has several effects upon the performance of a lens. Firstly, since much of the reflected energy is thrown backwards, there will be a reduction in the amount of the power radiated in the forward direction and so a loss of gain. For a lens of refractive index 0.6, the value of R given by Equation (52) is 0.0625 and so the average transmission coefficient through the lens surfaces will be approximately $(0.9375)^2$, i.e., 0.88 approximately. The variation of the transmission coefficient has been neglected in arriving at the above value, and it is found that when this variation is taken into account the average value over the whole surface is less than 0.88. Even this conservative allowance of the effect of reflexion corresponds to a drop in gain of 0.5 db., which is sufficiently large to be of importance in many applications.

Some of the reflected energy will be picked up by the primary feed, and causes a mismatch of the oscillator supplying the radiated power. Such a mismatch has an adverse effect on the oscillator, particularly if it is a magnetron, as will often be the case. The amount of energy picked up in this way by the feed is much smaller than for a paraboloid, but in one respect it is more troublesome. The focal length of a lens is much greater than for a paraboloid of the same aperture size; for a given change in wavelength, the phase difference between the outgoing and reflected waves will therefore alter more for the lens than for the paraboloid. This means it is more difficult to match the feed over a given range of wavelengths for the lens than for the paraboloid.

The last effect of the reflexion arises from the oscillations of the transmission coefficient caused by the varying lens thickness. It has been shown theoretically that these oscillations are responsible for the far-out side-lobes mentioned in Parts II and III. Besides the alteration in the shape in the radiation pattern, these side-lobes represent a further loss of power from the main beam.

Reflexions in optical lenses have been widely studied and methods of removing them have been developed. A widely used technique is known as "lens blooming" and consists of coating the lens surfaces with a layer of material of suitably chosen refractive index and thickness. When the analogy between transmission lines and free space propagation is invoked, it is found that this coating process is essentially the same as inserting a quarter-wave transformer to achieve a match between two transmission lines of different characteristic impedances. An application of this process to microwave lenses would remove all the undesirable effects of reflexion which have been discussed above. The way in which it may be done for the various types of lenses will be described below.

With dielectric lenses, the process may be carried out directly by using two materials whose refractive indices satisfy the required relation that that of the matching layer must be the square root of that used for the lens proper.[8] An alternative procedure is to machine slots of approximately a quarter-wavelength depth in each face of the lens; this slotted portion will behave similarly to the matching layer.

The refractive index of a strip dielectric has been shown in Part II to depend on the strip dimensions and spacings, so that by altering one of these dimensions the refractive index may be adjusted to the value required for the matching layer. The most convenient method of doing this is to increase the gap between the strips, while keeping the lattice dimensions constant. Cohn[11] has confirmed experimentally that a delay lens, matched in this way, produces smaller reflexions than an unmatched lens. A similar technique may be used to match a rodded lens, the diameter of the rods being reduced in the matching layer.

Metal plate lenses are more difficult to match than any of the above types, and so far no satisfactory practical solution has been obtained. One possible method, similar to that of slotting the surfaces of a dielectric lens, is to serrate the edges of the plates. Other possible methods make use of the analogy to the method of matching the junction between two transmission lines by a suitably positioned reactance. Ways of obtaining this reactance are to insert irises within the plates, as is done in wave guides, to place wires of suitable diameter parallel to the edge of each plate, or to insert dielectric blocks or wedges within the plates. One solution, which is attractive mechanically, is to use the spacing rods, which are required to maintain the necessary distance between the plates, as the reactance.

It is thus theoretically possible to match any of the types of lenses discussed in previous articles, but doing so considerably complicates the design and construction of the lenses. In certain cases it may be sufficient to avoid only one of the effects of reflexion.

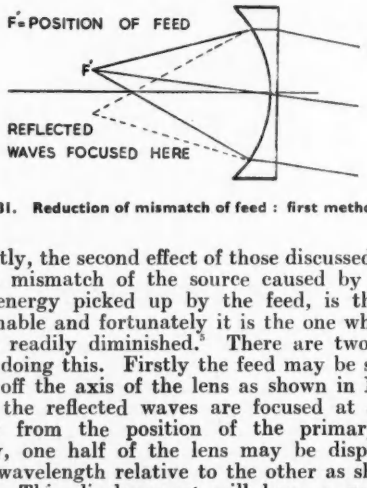

Fig. 31. Reduction of mismatch of feed : first method

Frequently, the second effect of those discussed above, i.e., the mismatch of the source caused by the reflected energy picked up by the feed, is the most objectionable and fortunately it is the one which can be most readily diminished.[3] There are two simple ways of doing this. Firstly the feed may be situated slightly off the axis of the lens as shown in Fig. 31, so that the reflected waves are focused at a point different from the position of the primary feed. Secondly, one half of the lens may be displaced a quarter-wavelength relative to the other as shown in Fig. 32. This displacement will have a negligible effect on the shape of the radiated beam, but will cause the reflexion from the two halves of the lens to be exactly out of phase at the primary feed and so to cancel each other out. In neither of these two methods is there any reduction in the total amount of energy reflected by the lens: the object of the methods is to redistribute the reflected energy in the least objectionable way.

It is always simpler to match a plane surface than a curved one and this may be done for the types of lenses which have one plane face. Matching one surface will reduce the total amount of energy which is reflected, thus increasing the gain of the lens

system. It will also remove the oscillation in the transmission coefficient across the outer surface of the lens, since there are no longer two reflected waves which may interfere with each other. The far outside lobes in the radiation pattern, which are caused by the presence of such an oscillation, will therefore be removed.

Ideally, all the energy radiated by the primary feed is focused by the lens, but in practice some of the energy will propagate round the edges of the lens. The energy lost in this way is known as spillover.



Fig. 32. Reduction of mismatch of feed : second method

It represents a loss in the gain of the lens and will also cause a slight increase in the far-out side-lobe level. This spillover may be reduced by making the primary feed more directive, but if this process is carried too far, the primary feed will become so directive that only a portion of the lens will be illuminated. Some compromise must therefore be found, and the most satisfactory one in practice is to make the directivity of the feed such that the amplitude distribution across the outer face of the lens is so tapered that it is 10 db. lower at the edges than at the centre of the lens. With such a tapered distribution, the spillover loss will not be excessive and the level of the largest side-lobe in the radiation pattern will not exceed about 22 db. below the level of the main beam. Spillover loss may be avoided altogether if the lens is inserted at the mouth of an electro-magnetic horn, whose aperture size must, of course, be the same as that of the lens. When this is done it follows, from the properties of horns, that the distribution across the outer face of the lens will be uniform in the direction of the electric vector and tapered in the direction of the magnetic vector. A system of this type is known as a lens-corrected horn and is superior to an ordinary horn in that larger flare angles are possible, thus reducing the total length of the system. Lens-corrected horns have effective radiating apertures of about 80 per cent of their physical apertures[5] and are among the most efficient aerial systems at present available.

Wide-angle Scanning

This section will commence with a discussion of the aberrations arising when the feed of a plano-concave metal plate cylindrical lens is moved off the axis. Only the type of lens in which the waves within the lens are constrained by the plates to travel parallel to the axis will be considered for the moment. This type has been selected as the calculations involved in finding the aberrations are much simpler than for any of the other types. Suppose then that the feed is moved to the position F′ as shown in Fig. 33. The phase difference Φ degrees between any point P on the outer surface of the lens and the central point O′ is given by the expression

$$\Phi = 360[\{(f\cos\alpha - z)^2 + (x - f\sin\alpha)^2\}^{\frac{1}{2}} + nz - f]/\lambda \quad (54)$$

where x, z are related by the equation for the lens contour, Equation (32).

The expression on the right-hand side of Equation (54) may be expanded in powers of x giving

$$\Phi = -360[x\sin\alpha + \sum_{n=2}^{\infty} A_n x^n]/\lambda \quad \ldots\ldots\ldots\ldots\ldots\ldots (55)$$

where the coefficients A_n may be determined from



Fig. 33. Scanning aberrations of a constrained cylindrical metal plate lens

Equation (54). The first term of this, i.e., $-360\ x\sin\alpha/\lambda$, is the phase distribution required to move the maximum of the main beam radiated by the lens to a direction making an angle α with the axis. The remaining terms are unwanted errors and may be separated into two sums, which involve only even and odd powers of x, respectively. The first of these sums gives the magnitude of the spherical aberration, while the second gives the magnitude of the coma. Spherical aberration causes a reduction in the gain of the lens, an increase in the beam-width of the radiation pattern and an increase in the size of the side-lobes relative to the main beam. The coma term is asymmetric, i.e., the value for a negative value of x is equal in magnitude but opposite in sign to that for the corresponding position value of x, and it will therefore cause the radiation pattern to be unsymmetrical about the direction of the maximum.

The magnitude of both errors increases as the angle is increased and will eventually become so large that the radiation pattern will no longer be acceptable. In other words, the spherical aberration and coma place a limit on the maximum value of the angle α, which the beam may be moved off axis. As a reasonably accurate guide, it may be said that the errors at the edge of the lens must be less than 60° for the spherical aberration and 90° for the coma term. If the primary feed is moved on the arc of a circle of radius equal to the focal length and centre the point O in Fig. 33, the spherical aberration will reach its maximum permitted value before the coma term. It may be shown that the maximum value of α depends on the focal number F of the lens and the refractive index, typical values for a lens of the type so far discussed being 15° for $F = 1.5$ and $n = 0.6$. For a given value of n, the maximum angle of scan will increase as the focal number increases. The nature of the radiation pattern at the maximum value of α is shown in Fig. 34, for the 8-ft. metal-plate lens discussed in Part III.

In view of the advantages to be gained in moving only the feed to scan the radiated beam, it is of importance to obtain the design of a lens which will

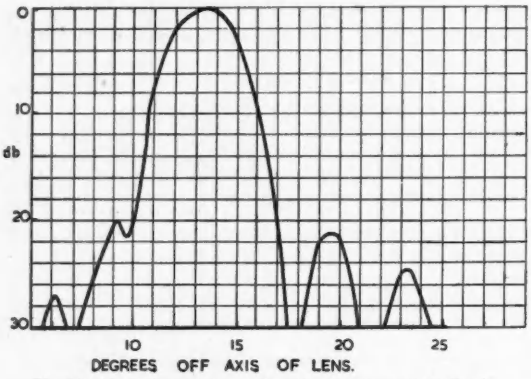

Fig. 34. Radiation pattern when the feed is moved off axis

produce the maximum scanning angle. As was pointed out in the previous paragraph, the scanning angle is limited by the spherical aberration when the feed moves on the circular arc. It is possible to reduce the spherical aberration by moving the feed along the line F'O, i.e., by refocusing the lens. In the particular case so far discussed, the scanning angle may be slightly increased in this way. Although the discussion so far has been limited to the constrained type of cylindrical metal plate lens, it may be shown that other types of cylindrical lens have similar scanning properties. The maximum aberrations in spherical lenses occur at the corners, and so the maximum scanning angle is in general less than for the corresponding cylindrical lens of the same F number.

The second way in which the scanning properties



Fig. 35. Design of a dielectric lens with optimum scanning properties

of a lens may be improved is to redesign the lens contour, allowing both surfaces to be curved. This problem has been tackled by Friedlander[23] for a dielectric lens, by making use of a theorem in optics, known as the Abbé sine principle. This states that the lens contour, with the best scanning properties, is such that the ray paths from the focus to the back surface will intersect the ray paths emerging from the front surface on a circle centre the focus and radius the focal length, as shown in Fig. 35. The calculation of the lens profile, which will satisfy the sine principle, is very complicated and involves the numerical integration of a differential equation. Friedlander has shown, however, that if the refractive index of the lens is approximately 1.6, a plano-convex lens, which has its plane surface on the same side as the feed, is a sufficiently good approximation to the ideal solution.

(*To be continued*)

References

[21] J. Stratton, : "Electromagnetic Theory," McGraw-Hill Book Company, 1941, p. 490.
[22] J. F. Carlson and A. E. Heins : "The Reflexion of an E.M. Plane Wave by an Infinite Set of Plates," *Quart. Applied Math.*, 4, p. 313, Jan., 1947.
[23] F.G. Friedlander : "A Dielectric Lens for Wide-Angle Beam Scanning," *J.I.E.E.*, Vol. 93, Part III A, No 4, 1946, p 658

"Autoselector" Automatic Tuning Mechanism

THE Equipment Division of Mullard Electronic Products, Limited, Century House, Shaftesbury Avenue, London, W.C.2, has secured from Messrs. Philips Telecommunications Industries the U.K. sales, design and manufacturing rights of a new "Autoselector" automatic tuning and selecting mechanism.

These autoselectors are used to turn shafts repeatedly to pre-set positions with speed and accuracy. Automatic electrical remote control is employed, and the setting accuracy is such that the positions selected never differ by more than $\pm$ 0.050° from those which have been pre-set in the mechanism.

There are many applications of these new autoselectors, both in radio engineering and in industry. For example, they enable the frequencies of radio transmitters and receivers to be speedily and accurately selected. In industry, they may be a valuable asset where accurate machine tool operations have to be repeated many times, for example, on lathes and on grinding and cutting machines.

The speed of operation of autoselectors is such that, using small transmitters, the system reaches the required setting within two seconds of the operation of the selector switch. Using larger transmitters, the setting time is less than ten seconds. As a result of this, tuning adjustments are much more rapid than with manual tuning.

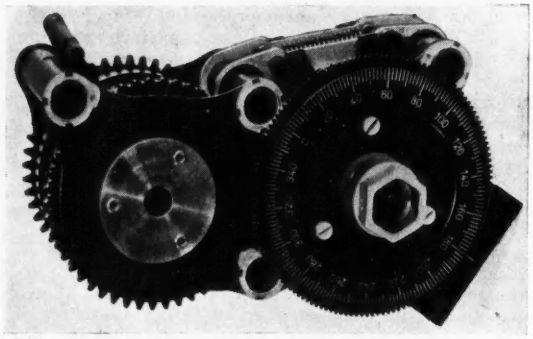

Two types of autoselectors are at present available. These are similar in design but are of different capacities. The small type SZT.101 can transfer a maximum torque of 2.4 lb.-in. (3 kg.-cm.) and is intended for small apparatus, such as aircraft radio equipment. It can stop a shaft in any one of 12 pre-set positions. The large type SZT.102 can transfer a maximum torque of 12 lb.-in. (15 kg.-cm.) and is used in larger apparatus. This type can stop a shaft in any one of 11 pre-set positions, and has additional facilities for manual adjustment of the controlled spindle. Autoselectors capable of transferring a maximum torque of 80 lb.-in. (100 kg.cm.) will soon become available.

Noise in Variable Resistors and Potentiometers

By FRANCIS OAKES

VARIABLE resistors and potentiometers are widely used in all branches of electronic engineering, for many different purposes and in a great number of circuits. But while the resistance range for normal applications extends from a few ohms up to several megohms, the majority of such variable resistors and potentiometers are of similar physical size and essentially the same construction.

Apart from the wire-wound rheostats and potentiometers used for special purposes, the carbon track potentiometer with an approximate size of $\frac{3}{4}$ in. to 2 in. diameter and a load-carrying capacity of the order of one watt is used to cope with the majority of electronic applications. To use such a potentiometer as a variable resistor, one of the extreme terminals is simply left disconnected. The most common design is characterized by a carbon track applied on a paper or plastic base in the form of an arc of about



Fig. 1.
Circuit for noise testing

270-300° (sometimes more) with a metal sliding contact moving over the arc. Another design makes use of a "squash plate" of thin metal in the shape of part of a conical surface, brought into contact with the carbon track along one moving radial line by means of a movable wiper arm. A recent German design makes use of a small drop of mercury held in a cup and moved along the carbon track as a liquid contact of low-noise and non-wear characteristics.

Resistance-Rotation Characteristic and Rotational Noise

Whether or not a current is passed through the terminations, noise voltages appear across any two of the three terminations, and so long as the rotor is stationary, the noise phenomena observed do not differ from those of fixed resistors. When the rotor is turned and the moving contact passes over the resistance track, additional noise is produced different from the stationary noise in magnitude and frequency distribution. The magnitude, for normal potentiometers, is of the order of about one or two millivolts per volt applied across the extreme terminations *A* and *C* in a typical case such as illustrated in Fig. 1, and for a speed of rotation of approximately one full rotation per second. This magnitude chiefly depends on the type, design and condition of the potentiometer, and also on its resistance value, the speed of rotation and the loading current.

The characteristic of a variable potentiometer most significant with respect to its influence upon noise characteristics is the resistance-rotation characteristic. This characteristic depicts the percentage variation of resistance between the "anti-clockwise" terminal *C* and the moving terminal *B* as a function of percentage of clockwise total rotation. Fig. 2 shows the resistance-rotation characteristic of a linear-law potentiometer, i.e., of a potentiometer where the voltage across *B-C* is proportional to the amount of clockwise rotation when a constant voltage is applied across *A-C*.

For the use as a volume control or gain control, however, it is desirable that the voltage across *B-C* should vary approximately as an exponential function of the amount of clockwise rotation, therefore the logarithm of the resistance between the "anti-clockwise" terminal *C* and the moving contact terminal must be approximately proportional to the percentage rotation. This is in consequence of Weber-Fechner's logarithmic law of sense perception, according to which the intensity of sense perception varies as the logarithm of the amplitude of the stimulus. The resistance-rotation characteristic of such a logarithmic-law potentiometer is shown in Fig. 3. A significant parameter for the classification of potentiometers as to the nature of their resistance-rotation characteristic is the percentage of total resistance across *B-C* for 50 per cent rotation. For a linear-law potentiometer this is 50 per cent and for a logarithmic-law potentiometer such as shown in Fig. 3 it is of the order of 10 per cent.

The gradient at any point of the resistance-rotation characteristic is a measure of the change of resistance per change of setting, and also a measure of the voltage gradient along the track at this particular point. This is of great importance for the noise behaviour of a potentiometer, in fact, the noise produced at any point of the track when passed by the moving contact will naturally be approximately proportional to the voltage gradient at this point, because of the dependence of noise generation upon the voltage load across the resistance element. For example, in the case of Fig. 3, only 10 per cent of the voltage applied across *A-B* appears across the first 50 per cent of the resistance track, whereas the remaining 90 per cent appears across the remaining half of the track.

It follows from these considerations that the rotation-noise characteristic, i.e., the characteristic showing the distribution of noise over the rotational range, will be uniform for a linear-law potentiometer; for a non-linear potentiometer, the noise produced over the first half of the rotational range will be much smaller than for the remainder of the range. A rotation-noise characteristic is shown in Fig. 4 for a linear-law and in Fig. 5 for a logarithmic-law potentiometer.

Such characteristics can be obtained by photo-



Fig. 2.
Resistance-rotation characteristic of linear-law potentiometer

graphic recording of an oscilloscope trace. The potentiometer is connected with its terminals *A* and *C* across a source of D.C. such as a 4.5 volt battery and the terminals *B* and *C* to the grid and earth terminals, respectively, of a high-gain wide band amplifier. The output of the amplifier is connected to a cathode-ray oscilloscope. No time-base is used, and the trace is recorded by means of the rotary drum camera shown in Fig. 6. Another simpler arrangement which, however, does not permit the recording of long extended traces as does the rotary drum camera, makes use of an ordinary camera, with the Y-plates coupled to a wire-wound precision potentiometer ganged to the spindle of the potentiometer on test. The arrangement is shown in Fig. 7. This arrangement offers the advantage of simplicity in operation and of an accurate co-ordination of noise and the area where this noise is produced.

The long strips of photographic record obtained by the first method have been cut in several sections for ease of reproduction. The timing marks on the top edge of the film strip denote 1/50 sec. and have been obtained by means of 50 cycle A.C. on the second electron beam of the double beam tube used for recording. The most striking feature in comparing the two types of potentiometers is the very small amount of rotational noise in the lower half of the logarithmic-law potentiometer. This fact is not generally realized, but should be obvious from the following considerations: As only about 10 per cent of the voltage is dropped over the first half of the track, the voltage gradient and the noise are only 1/10 of that for a linear-law potentiometer. The remaining half, taking approximately 90 per cent of the load, has approximately double the voltage gradient and double the noise level as compared with a linear potentiometer. This is a decided advantage for such applications as for volume control, because in a radio receiver the first half is normally used on low volume level and for local stations where little background noise is expected. When turned further clockwise into the "steep" region, the increase in noise level in case of distant station reception or the increase in output for local stations will retain a high audio-signal to noise ratio.

Causes of rotation noise

The causes for noise generation in a potentiometer during rotation are manifold. Close inspection of the resistance-rotation characteristic will reveal minute deviations from a straight or smooth line, and a certain amount of low frequency noise will be due to these irregularities alone when the contact is moved along. When the mechanical characteristics of the track surface and of the contact or squash plate are investigated under the microscope, these surfaces appear to have far from ideal smoothness,



Fig. 3.
Resistance-rotation characteristic of logarithmic-law potentiometer

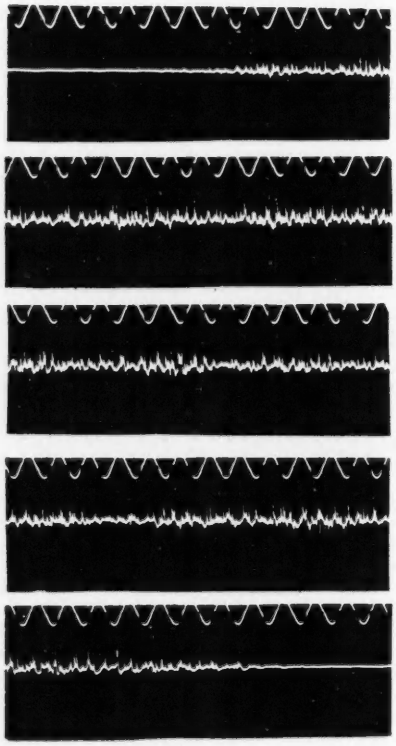

Fig. 4.
Rotation-noise characteristic of linear-law potentiometer

and unless the potentiometer is absolutely unused, a certain amount of scoring along the line of contact can be observed. Suitable design of the sliding contact is likely to reduce scoring to a tolerable amount and to counteract undesirable effects of surface roughness of the resistance track. In some cases this is done by a rounded contact of approximately cylindrical shape in the neighbourhood of the contact region, which will make contact with the track along a radial line. Other designs make use of a flat contact disk flexibly mounted so as to have a large number of "points" of contact with the resistance element. In each case, the contact pressure will have to be controlled between suitable limits because excessive contact pressure is always responsible for undue wear, whereas a certain minimum pressure is

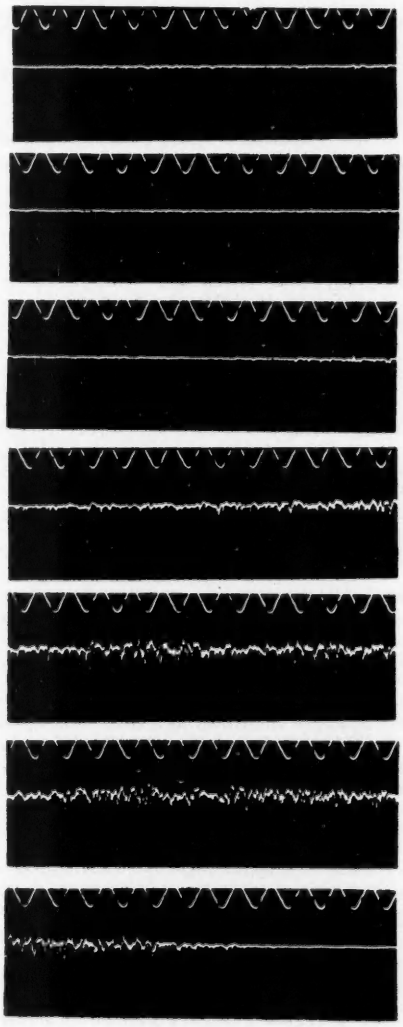

Fig. 5.
Characteristic of logarithmic-law potentiometer



Fig. 6.
Recording noise traces with a rotary drum camera

necessary to keep noise and contact resistance as low as possible under this circumstance of compromise. It is often unjustified to conclude that noise is necessarily produced by surface roughness, or that the potentiometer with the rougher track surface is always the one with greater noise. In actual fact, it is always a combination of surface and contact, and in the case of track roughness, of the particular *type* of roughness. On the other hand, it is usually correct to assume that a coarse surface of the sliding contact will result in noisy performance and undue wear.

The squash-plate type of moving contact is designed to avoid all lateral movement of surface against surface, thereby avoiding sliding action and reducing wear. The plate is distorted by a wiper moving on top of the plate and pressing it down on to the resistance track in the fashion of a cone rolling about its apex on a plane. Contact is made along a moving radial line. Noise is generated by virtue of the fact that parts of the track are suddenly short-circuited



Fig. 7.
Recording noise traces with a stationary film and X deflexion by a standard potentiometer

by the squash plate descending on to a slightly protruding part of the surface further along the track, by small particles of dust on the plate or resistance-element and by the irregularities of the resistance-rotation characteristic. Whereas the problem of wear is considerably reduced by this type of moving contact, very great care has to be taken to eliminate surface flaws, and to prevent dust particles from location between the contact surfaces.

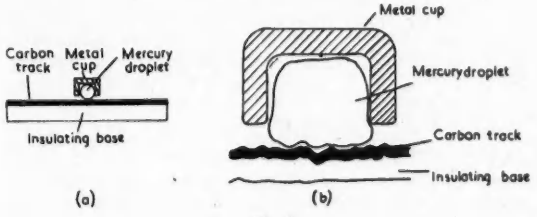

Fig. 8.
Mercury contact type of potentiometer

The mercury contact illustrated in Fig. 8 is capable of reducing wear to a minimum as well as avoiding undue noise generation by surface roughness. A certain amount of noise is generated, however, by the advance of the mercury drop, which naturally must not wet the cup or surface, and therefore in its advance acts in a fashion combining that of the wiper and that of the squash plate. A schematic view of the advance of the mercury drop is shown in Fig. 8(a).

The phenomena described so far refer to potentiometers in good condition and of efficient design. In the case of faulty components, very greatly increased noise can often be found due to aggravation of surface defects by scoring, wear or climatic and chemical action, sometimes resulting in momentary open circuits, which cause considerable noise voltages. Other causes of noise are bad connexion of the extreme terminations or poor contact in the slip ring or other device used to connect the moving contact to the stationary centre terminal.

Frequency Distribution

The frequency distribution of the noise produced by a potentiometer on rotation varies greatly with the cause of noise. In distinction to the noise produced by fixed resistors, this distribution is very irregular and usually contains a far greater percentage of lower audio frequency contributions. This is illustrated in Fig. 9, of which the top trace was taken with a potentiometer on fast rotation and the bottom trace with a fixed resistor and increased amplifier gain setting.

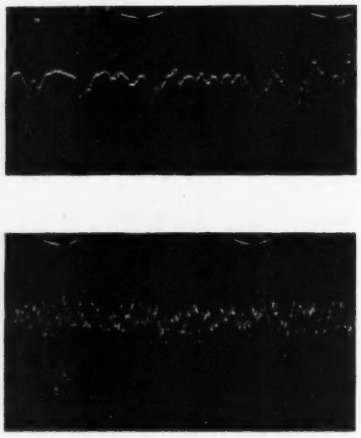

Fig. 9.
Noise traces of fast moving potentiometer (top) and fixed resistor. Amplitudes not to scale

The potentiometer oscillogram in Fig. 9 is a centre portion representing one-fifth of the total length of a record made when turning the rotor through its full course in about 1/5 second. The amplitude and frequency distribution of the noise produced on fast rotation is different from that produced on slow rotation. Normally, the amplitude is greater and the distribution more uniform on fast rotation.

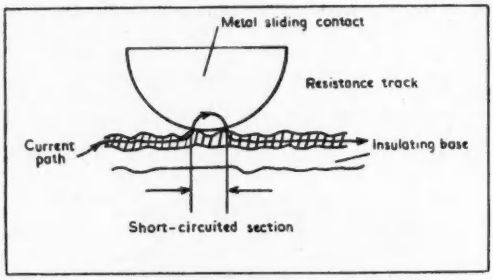

Fig. 10.
Noise generation by intermittent short-circuiting of track elements

It is interesting to observe that repeated operation of a potentiometer in good condition yields fairly consistent noise records, but that the record taken for clockwise operation is often greatly different from that for anti-clockwise operation, both in amplitude and distribution of frequencies.

Certain wiper-type sliding contacts show distinctly non-symmetrical noise traces. Fig. 4 is a good example of this. The direction of sharp peaks is seen to be upwards in this case, and would be reversed for reversed direction of sliding contact movement. An explanation of this phenomenon can be found in the mechanism of contact movement. "Sticking" action due to surface friction and elasticity of the moving contact assembly and "jumping down" from high spots due to spring pressure can be responsible. "Saw-tooth" roughness of the surface cannot be made responsible for this type of asymmetrical noise trace because this would not account for reversibility of noise peaks on reverse rotation of the potentiometer spindle.

Mechanical Considerations

A number of mechanical considerations are involved in the investigation of rotational noise generation. Most important of these is the fact that contact is never made on a single point, along a line or on a single integral surface. Therefore, in the advance of the moving contact, parts of the resistance path are continually short-circuited and also "switched" into circuit. This can be understood from inspection of the schematic drawing Fig. 10. While the moving contact slides over two "hilltops", the "valley" is short-circuited and, at least for this area, no resistance change or voltage change takes place for a small incremental movement. When a "hilltop" is left or when another "hilltop" is touched in the advance of the moving contact, a large resistance and voltage change is caused by a small incremental movement. Simultaneously, the current carried by the resistance element in the case of constant voltage across its terminals (or the total voltage across the resistance element in the case of constant current) undergoes a corresponding variation in consequence of the variation of the total resistance caused by the mechanism of switching parts of the resistance in and

out of circuit. With a smaller surface of contact this phenomenon is reduced; this, however, is done at the expense of increased specific contact pressure and consequently increased wear of the surface. It is for that reason that extension of the contact surface is generally sought in a radial direction. In this way the switching phenomena are carried out in parallel with one another and their detrimental effect in producing voltage fluctuations is effectively reduced. Another reason for reducing the specific contact pressure as far as is compatible with a reasonably high absolute contact pressure is to avoid undue local deformation of the track by the passage of the moving contact. The latter considerations are more important for sliding solid contacts than for plate or mercury contact types.

An important problem is that of surface lubrication. Efforts are sometimes made to improve performance by the application of grease lubricants, but their effect, though temporarily beneficial, usually has its adverse consequences in shortening the life of the resistance element by chemical or physical action on the lacquer or base.

Wear is normally the largest single factor impairing the noise characteristics of a variable potentiometer. Consequently, careful consideration must be given to this problem in manufacture and development of new types. The common practice is to test samples of potentiometers by means of a cycling test. This is carried out in turning the potentiometer spindle from extreme starting to extreme stopping position and back in a suitable testing machine capable of carrying out tens of thousands of such operations within one or two days. The noise produced is measured at suitable intervals, and in this way the wear-noise characteristics of a potentiometer type can be investigated.

Three regions on the track of a potentiometer warrant particular consideration from the point of noise generation. These are the starting region at the anti-clockwise extreme, the stopping region at the clockwise extreme and the juncture of the low-resistance and high-resistance sections in the case of a logarithmic-law potentiometer. The first two mentioned are characterized by short areas of low-resistance coating which serve to provide a reliable contact between the extremes of the resistance track and the terminals *A* and *C*. Here, with a well-designed potentiometer, very little noise is generated. Bad design, on the other hand, can be responsible for excessive noise generated in this region alone, even where the remainder of the resistance track gives satisfactory operation. For a potentiometer with as widely different resistance changes per degree of rotation as is necessary for a logarithmic law, the resistance element or the resistance coating is made of two or more sections of different specific resistance. The region of juncture normally is characterized by noise generation half-way between that of the adjacent sections.

For use in electronic circuits, potentiometers are often made fixed in order to ensure low-noise performance. On the other hand, modern variable potentiometers provide a means for smooth control and much can be done by careful selection of the correct position within the circuit of application to ensure satisfactory operation. For use where current is passed through the moving contact more care must be taken as the amplitude of fluctuations is greater for such cases. Where a voltage rather than a current is controlled, a potential being tapped at a variable ratio by means of the moving contact, current should not be passed through the potentiometer resistance element unnecessarily. In many cases it is possible to block the D.C. when only an A.C. potential is required, such as in the case of audio-amplifier volume control, where low noise is essential. Another method sometimes helpful in obtaining a reduction of noise is to shunt a potentiometer by a fixed resistor carrying the greater portion of the current while the variable proportion of voltage is obtained from the potentiometer at a low noise level. Care must be taken for correct estimation of signal-to-noise ratio for negative feed-back applications as shown in the circuit Fig. 11. This circuit is sometimes used to provide gain control in high-gain wide-band amplifiers. When calibrating to the required gain it is often found that the deflexion on the output meter is erratic due to noise produced by this variable resistance while it is moved. This severely hinders the process of calibration. The difficulty can be overcome by replacing the variable resistor by a fixed resistor (or several steps of fixed resistors) and replacing the fixed resistor *R* by a variable resistor. In this way, only a fraction of the standing current will pass through the variable resistor, and the generation of noise will be reduced considerably. For application in tone control circuits similar precautions are advisable where a high ratio of amplification follows the tone control stage. In radio-frequency circuits where the use of variable potentiometers and resistors is normally restricted to parts of the circuit not carrying a signal current, as, for instance, in the control of variable-mu valves, rotation noise is of little consequence.



Fig. 11.
Variable negative feedback circuit, sometimes unsuitable because of noise

For many applications, as, for instance, that of volume and tone control in radio receivers, the problem of rotation noise has still to be solved. While in new equipment trouble is rarely experienced from this source, noise often appears as a consequence of wear. This trouble does not only arise when the potentiometer is actually operated by hand, but in many cases vibrations transmitted mechanically and acoustically to the elements of the potentiometer can give rise to audible noise or distortion. With the new types of potentiometers now in production, or in a state of development, it is hoped that these phenomena will be reduced to such an extent that eventually, at least for radio receiving and television equipment, their noticeable effects will be eliminated.

RESULTS ON A MIDLANDS "TELEVISOR", AT 35 MILES RANGE

Snapped by a Home Constructor

The Solovox

A Novel Electronic Musical Instrument

By ALAN DOUGLAS*

THIS device is one of the products of the Hammond Instrument Company of Chicago. It is a purely melodic instrument, that is, one on which only one note at a time can be played, although more than one octave of any one note can be sounded simultaneously. In consequence, it requires that some other musical instrument should accompany it, and since the most probable choice is a piano, the Solovox is designed to attach directly to the front of a standard piano frame.

Playing keys and controls

The compass of the playing clavier is three octaves, terminating on top B; to extend it to C would require extensive circuit changes. The keys are of standard width and compass, but somewhat foreshortened so as not to interfere with a normal playing position for the performer. Each key is hollow, and contains the contact mechanism for closing the necessary circuits. The keys are moulded from Lucite, which is a plastic having the same coefficient of friction and the same moisture absorption as ivory; the "feel" is therefore the same to the player.

In front of the playing keys is a series of rocking tablets (above). These control the various pitches and tone-colours which are available from the circuit. The intensity or volume level is controlled by a pivoted knee pedal, similar to that on an American organ. An initial displacement of this operates the starting switch.

Oscillation generating circuits

The circuit is shown complete overleaf. The instrument functions in the following manner. A single valve oscillator is normally tuned to the highest note obtainable on the Solovox. (B = 3,951 c/s., A being standard pitch 440 c/s.) When any playing key is depressed, the oscillator is retuned to that note frequency by alteration of the capacitor stack shown in the schematic. The oscillator output is fed to a series of cascaded frequency dividers, which produce notes in successively lower octave relationship. Thus for any one playing key fundamental, five other lower octaves are simultaneously available, so that, although only one note can be played at a time, all five octaves of that note can be made to sound at once, adding considerable boldness to the tone. Any or all of these octaves can be selected by some of the tablets shown.

There are a number of circuits for obtaining one output pulse from two input pulses.* Some of these are characterized by poor waveform, but the harmonic content of the Solovox dividers is entirely acceptable from a musical standpoint. This frequency divider consists of three triode valves; two of these are combined in one envelope in all stages except the first. The feedback circuits connecting the two triodes are of such a nature that only one valve can conduct at a time, for by drawing anode current it keeps the other valve cut off.

If, for example, the first triode conducts and the second is cut off, then a negative pulse on the grids of both triodes cannot affect the second one, which is already cut off, but will cut off the first. This produces a positive pulse at the anode of the first triode, which is applied to the grid of the second through the feedback network. The second triode then conducts, producing a negative pulse at the anode; this latter pulse is fed back to the first grid and thus cuts this valve off. This is the reverse condition to that which we imagined at the start of the cycle. Thus two input pulses produce only one output cycle, so halving the frequency. The output signal comes from one anode, the other being used to drive the next divider.

So far we have seen that if any note key is depressed, the oscillator is re-tuned. In order to prevent an off-pitch tone being generated if two keys are accidentally pressed together, the register selecting relays in the circuit diagram do not permit more than one circuit at a time to close. The series arrangement of the tuning capacitors automatically controls the tuning so that always the higher of the two notes will sound.

* *The Electronic Musical Instrument Manual*; A. Douglas. (Pitman).

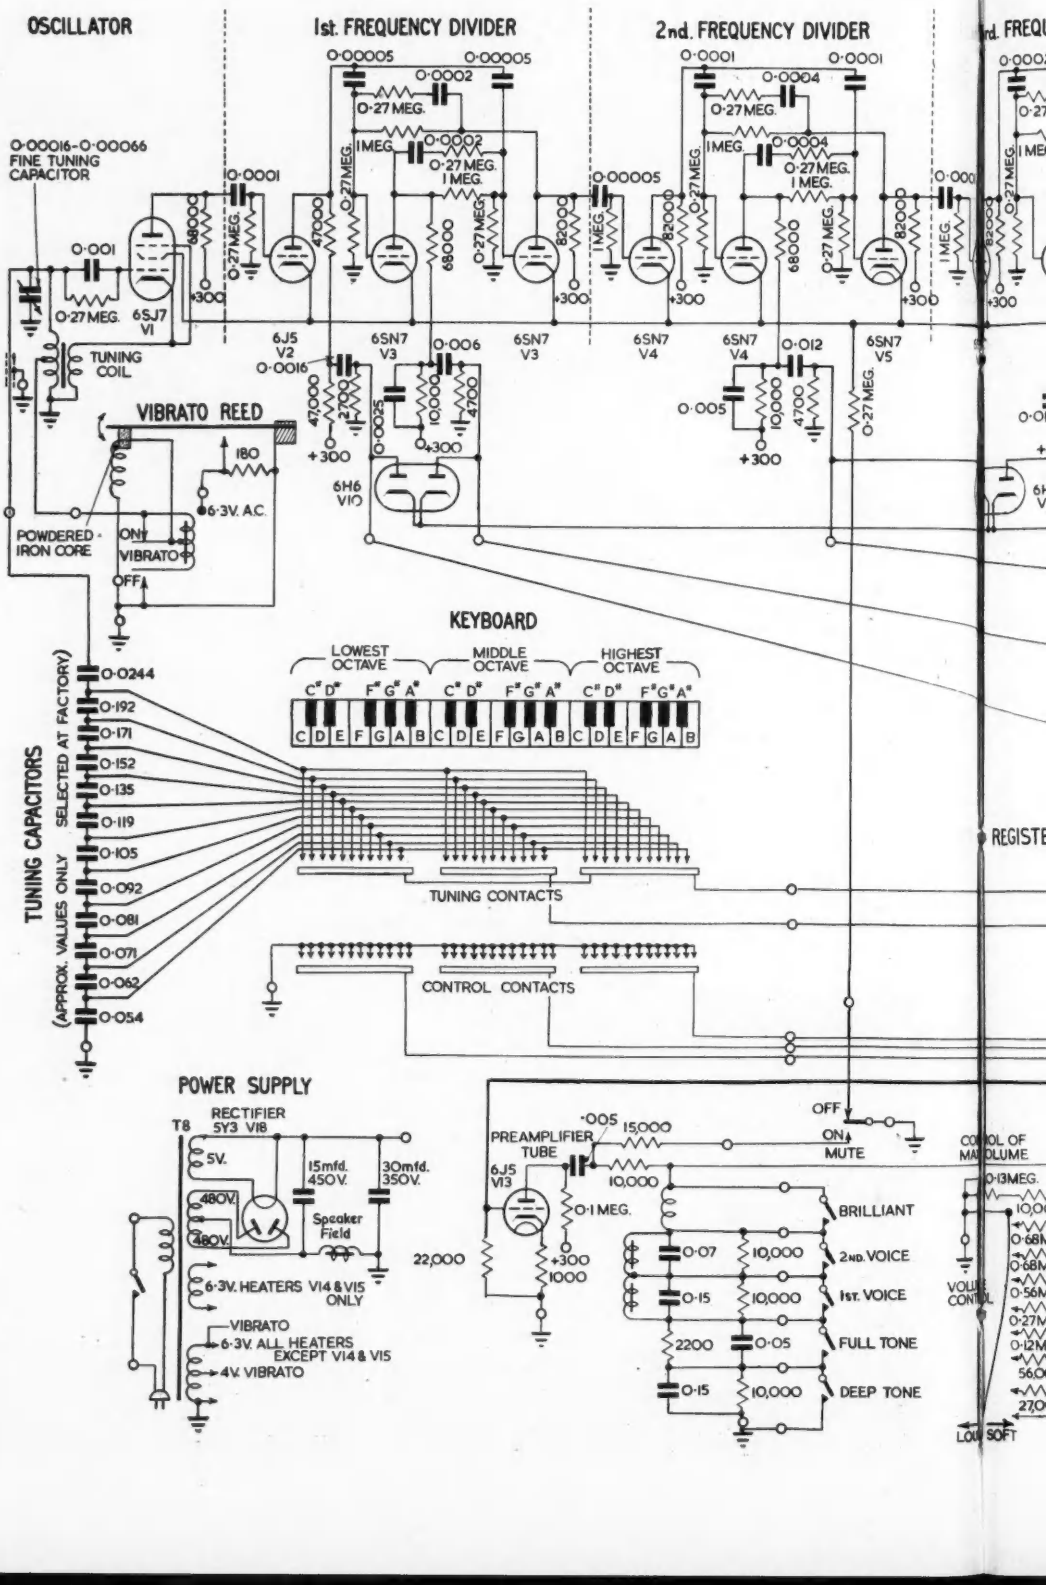
OSCILLATOR
1st. FREQUENCY DIVIDER
2nd. FREQUENCY DIVIDER
0·00016-0·00066 FINE TUNING CAPACITOR
0·001
0·27 MEG.
6SJ7 V1
TUNING COIL
VIBRATO REED
POWDERED IRON CORE
180
6·3V. A.C.
ON VIBRATO
OFF
6J5 V2
6SN7 V3
6SN7 V4
6SN7 V5
6H6 V10
+300
KEYBOARD
LOWEST OCTAVE
MIDDLE OCTAVE
HIGHEST OCTAVE
C C# D D# E F F# G G# A A# B
TUNING CAPACITORS (APPROX. VALUES ONLY SELECTED AT FACTORY)
0·0244
0·192
0·171
0·152
0·135
0·119
0·105
0·092
0·081
0·071
0·062
0·054
TUNING CONTACTS
CONTROL CONTACTS
POWER SUPPLY
RECTIFIER 5Y3 V18
T8
5V.
480V.
480V.
15mfd. 450V.
30mfd. 350V.
Speaker Field
6·3V. HEATERS V14 & V15 ONLY
VIBRATO
6·3V. ALL HEATERS EXCEPT V14 & V15
4V. VIBRATO
PREAMPLIFIER TUBE
6J5 V13
·005
15,000
10,000
0·1 MEG.
22,000
1000
OFF
ON
MUTE
BRILLIANT
2ND. VOICE
1ST. VOICE
FULL TONE
DEEP TONE
0·07
0·15
0·05
2200
10,000
VOLUME CONTROL
LOUD
SOFT

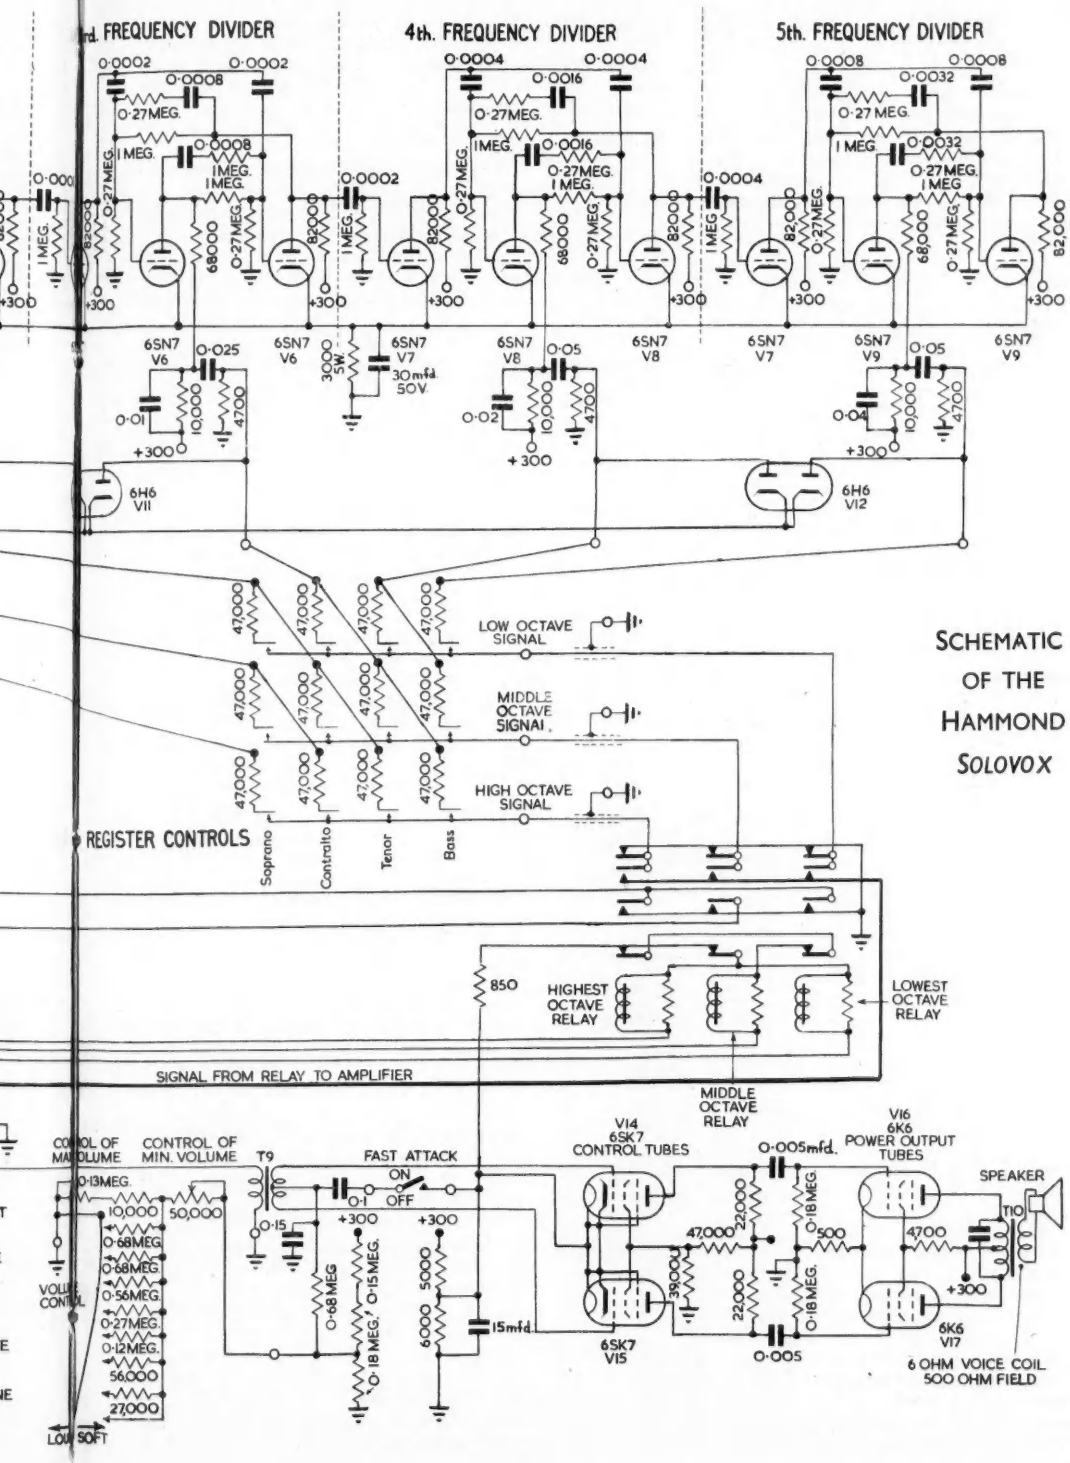

SCHEMATIC OF THE HAMMOND *SOLOVOX*

Methods for forming tone-colours

The waveform from the dividers contains a wide series of even and odd harmonics, and is thus susceptible to tone-forming circuits. There are three means of altering the shape of the envelope of the generated oscillations. It can be seen that across each divider output a diode valve is shunted. If this is connected, both even and odd harmonics will be passed; if it is disconnected, the even harmonics are suppressed, thus favouring a hollow and rather clarinet-like sound.

In addition, a series of resonant and low-pass filter circuits is provided in the output circuit of the pre-amplifier. The formants thus available can be combined in many ways to produce novel effects. The inductance in the "Brilliant" circuit removes all the bass and produces a biting tone-colour.

Attack and delay circuits

The third form of control is the capacitor in the control valve cathode circuit marked "Fast attack". This modifies the rate of build-up of the signal.

In all circuits in which keying of the signal takes place, transients will occur in the loudspeaker unless means are taken to suppress them. A familiar American method is to use steep cut-off pentodes, but in this case the control valves are of the variable-mu pattern and volume control is effected by varying the grid bias. The grid voltage range for complete cut-off during keying must therefore be much greater than usual.

This circuit functions as follows. The cathodes of the control valves are connected to the voltage divider as shown. This cut-off voltage is of the order of +175 volts. When a playing key is pressed, one of the selector relays must operate, and one relay coil is thus put in parallel with the lower resistor of the voltage divider. This causes the cathode voltage to drop to +55 volts. The valve then conducts. The large capacitor shown removes any trace of abruptness in attack or decay.

Expression control and vibrato

The volume is adjusted by means of a series of fixed contacts which eliminates the wear encountered with a rotating wire rheostat. There are seven steps, together with adjustable limiting resistances for maximum and minimum gain, and the control valve grid potential is varied by this resistance arm from about +45 volts to almost earth potential (minimum volume).

It will be seen that a vibrato is provided by an A.C. operated tuned reed which inserts or removes a small part of the main oscillator tuning inductance at about 7 c/s. Adjustment of the tuning inductance is instantly carried out by means of a coin slot in the oscillator coil core, which is on the top of the chassis. The instrument keeps in tune for very long periods without attention.

By suitable combination of the various controls, some interesting effects are possible. For example, soprano, deep tone and brilliant produce a creditable string tone; tenor, vibrato off, mute and full tone give a good clarinet; contralto, vibrato off, fast attack and second voice, a rather pungent trumpet; tenor, vibrato off, second voice and brilliant, a horn-like quality; and so on. The possible combinations are, indeed, practically limitless.

The present dollar exchange position precludes the sale of this ingenious little instrument in this country, but a very similar device of French origin, known as the Clavioline, will shortly be produced here.

Super-Power Beam Triode

WHAT is believed to be the world's most powerful electron tube, a high-vacuum "super-power beam triode" capable of 500 kilowatts of continuous output and tested at one million watts input, has been announced by RCA.

The new valve, RCA Type 5831, represents the first commercial attempt to build power output of this magnitude into a single valve. Despite its enormous power input capabilities—at least four times that of any previous RCA type—the new 5831 is of compact design, measuring 88¾ in. in length and weighing only 135 lb.

In unmodulated class C service, the 5831 has a maximum plate voltage rating of 16,000 volts, a maximum plate input of 650 kilowatts, and a maximum plate dissipation of 150 kilowatts.

The new valve generates its power at high efficiency and with exceptionally low driving power. To provide 500 kilowatt output in unmodulated class C service, under typical operation condition, the 5831 requires only about 900 watts grid drive. The tube can be operated with maximum rated plate voltage and plate input at frequencies throughout the broadcast band, and much higher. The limitations for operation of the tube at high frequencies and at higher power have not yet been determined.

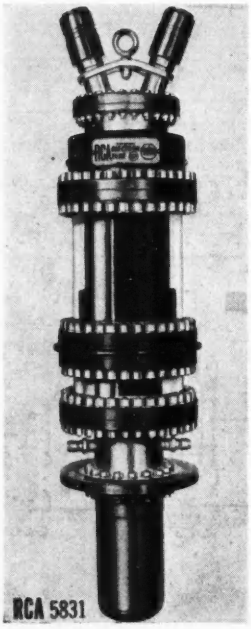

The outstanding feature of the 5831 is an array of 48 independent unit electron-optical systems arranged cylindrically in the tube. The great power capabilities of the new tube are due largely to the successful achievement of this design, which, in effect, concentrates 48 triodes in a relatively small space.

In detail, each of the independent electron-optical systems consists of a filament in a slot in the beam-forming cylinder, grid rods and the copper anode. Electrons leaving the emitting surface of the filament are beamed between a pair of grid rods to the anode by the focusing action of the beam-forming cylinder. Even though the grid may be positive, relatively few stray electrons strike it.

The Cable Transformer

By F. J. CHARMAN

A coupling network, made from lengths of standard rodio-frequency cable, which is designed to couple a balanced 70-ohm feeder to a quarter wave aerial

IT is well known that a quarter wavelength of transmission line will transform between Z_1 and Z_2 wnere the line surge impedance Z_0 is $\sqrt{Z_1 Z_2}$.

It may be inconvenient to have two kinds of cable in use, but a transformation can always be made using a length of cable plus two reactors to form a kind of π coupler.

Working in admittances and normalizing (i.e., dividing out by y_0 to refer to a "one mho cable") we have in Fig. 1 a load g_2 (the aerial) which is shunted



Fig. 1.
Cable terminated by complex admittance

by a susceptance b_2. The length of the cable is θ electrical angle and the admittance y_1 at terminal 1 will appear complex. The phase angle is corrected by the addition of a susceptance b_1, leaving a desired admittance $y_1 = g_1$.

The problem is to proportion b_2, θ and b_1 so that $g_1 = 1$, whereupon the line feeding end 1 will be correctly terminated.

The cable equation normally appears as

$$Z_1 = \frac{Z_2 \cosh \gamma l + Z_0 \sinh \gamma l}{Z_0 \cosh \gamma l + Z_2 \sinh \gamma l} \quad \ldots\ldots (1)$$

Dividing by Z_2, inverting, to get the admittance, normalizing, and dividing by $\sinh \gamma l$ we arrive at

$$y_1 = \frac{1 + y_2 \coth \gamma l}{y_2 + \coth \gamma l} \quad \ldots\ldots (2)$$

Assuming the line loss to be negligible, so that $\gamma l = j\theta$, we get

$$y_1 = \frac{1 - jy_2 \cot \theta}{y_2 - j \cot \theta} \quad \ldots\ldots (3)$$

Putting $y_1 = 1 - jb_1$, we get

$$(1 - jb_1)(y_2 - j \cot \theta) = 1 - jy_2 \cot \theta \quad \ldots\ldots (4)$$

Expanding and equating real and imaginary parts gives

$$\text{(Real)} \quad g_2 + b_1 b_2 - b_1 \cot \theta = 1 + b_2 \cot \theta \quad \ldots (5)$$

$$\text{(Imag.)} \quad b_2 - \cot \theta - b_1 g_2 = -g_2 \cot \theta \quad \ldots\ldots (6)$$

$$\text{from (6)} \quad b_1 g_2 = (g_2 - 1) \cot \theta + b_2$$

$$\text{or} \quad b_1 = \frac{(g_2 - 1) \cot \theta + b_2}{g_2} \quad \ldots\ldots (7)$$

Substituting (7) in (5) will give $\cot \theta$ and θ.

Example. A quarter wave earthed vertical aerial is to be fed through cable which is normally made for



Fig. 2.
Cable transformer, showing alternative methods of phase-correction

feeding dipoles and which has a characteristic impedance of 70 ohms. The aerial impedance is 35 ohms. As a matter of interest let the frequency be 160 Mc/s.

In this case $g_2 = 2$. The value of b_2 is arbitrary, but, as an intelligent guess, let us make $b_2 = 1$. (At 160 Mc/s., this is equal to 14.3 micro-microfarads.)

Then, by (7), $b_1 = \dfrac{\cot \theta + 1}{2}$

and, in (5),

$$4 + \cot \theta + 1 - (\cot \theta + 1) \cot \theta = 2 + 2 \cot \theta$$

giving the quadratic $\cot^2 \theta + 2 \cot \theta - 3 = 0$

whence $\cot \theta = 1$ or -3 and $b_1 = 1.0$.

The length of line for $\cot \theta = 1$ is $\frac{1}{8}$ wavelength, and for $\cot \theta = -3$ is 0.45 wavelength.

The shorter length will be chosen since the 0.45 wave line would require an inductance at end 1 so that, at 160 Mc/s., using polythene cable, the length is therefore about 6 in. The element b_1 can be a fixed capacitor or another $\frac{1}{8}$ wavelength of open circuited line. The element b_2 can be made to include the aerial terminal-bushing stray capacitance and may be adjusted, possibly by shortening the line a little.

Now let us investigate the performance over a band of frequencies, assuming that the transformer is set up correctly at 160 Mc/s. and that the aerial resonance is very broad or, alternatively, that the aerial can be re-tuned. If a whip aerial is employed, it will be necessary to tune it by adjustment of its length since the necessary small diameter prevents it from having broad-band characteristics.

Fig. 2 shows the alternative versions of b_1, i.e., capacitor or line section.

Then at $f_0 = 160$ Mc/s.

(c) $b_1 = 1.0$ $\cot \theta = 1.0$

(l) $b_1 = 1.0$ $b_2 = +j1.0$ $g_2 = 2.0$

and at $f_1 = 176$ Mc/s.

(c) $b_1 = 1.1$ $\theta = 49.5$ $b_2 = +j1.1$

(l) $b_1 = \tan 49.5° = 1.171$ $\cot \theta = .854$ $g_2 = 2.0$

$$g_1 = \frac{1 - jy_2 \cot \theta}{y_2 + j \cot \theta} + jb \quad \ldots\ldots (8)$$

using b_1 (c) $y_1 = 1.06 + j0.34 = 1.12\angle -17\frac{1}{2}°$

and b_1 (l) $y_1 = 1.06 + j0.41 = 1.13\angle -21\frac{1}{2}°$

The capacitive phase corrector is thus slightly better than the line equivalent, but in any case the resulting mismatch S.W.R. at the band extremities would not exceed 1.5, which would satisfy many practical cases. Thus with a suitable broadly-tuned aerial the range 160 Mc/s. ± 10 per cent could be covered by a simple fixed device comprising two one-eighth wavelengths of cable and a suitable mounting bush capacitance for the aerial.

A Method for the

Measurement of Capacitance and Resistance

By G. T. BAKER, M.Sc.

(British Telecommunications Research, Ltd.)

An electronic chronometer is used to measure the time taken for a capacitor/resistance combination to discharge between given potential limits. Alternatively, the discharge time is compared with two fixed intervals to determine whether a component is within a given range of values.

A WIDELY used method for the measurement of short time intervals involves the discharge of a capacitor through a resistance.[1,2] The time is given by:—

$$t = CR \log E_o/E_t \quad \ldots\ldots (1)$$

where E_o,E_t are the boundary potentials. Electronic technique provides alternative methods for measuring these times and it is possible to use Equation (1) to determine one of the other parameters, e.g., capacitance or resistance. By fixing E_o/E_t and either R or C the equation becomes:

$$C = kt \text{ or } R = k_1 t \quad \ldots\ldots (2)$$

If the values of k and k_1 are suitably chosen, the time measurements will correspond directly to capacitance or resistance units, e.g., microfarads or ohms. Two types of measurement are described. In the first the actual time period is determined to give precision measurements of capacitance and resistance. In the second, the time is compared with pre-set values to determine whether the capacitor or resistor under test is within a specified range.

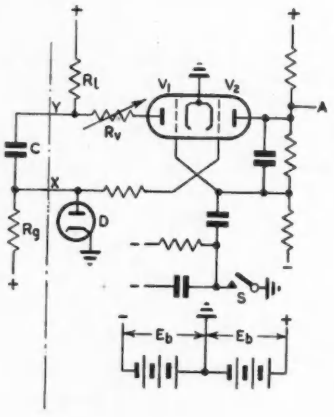

Fig. 1

Single-shot multivibrator circuit used for measurement

The requirements of the measurement circuit can be obtained from Equation (1). At $t = 0$, potential E_o must be applied to the capacitor and a signal extended to the timing equipment to initiate the measurement cycle. When the potential on the capacitor falls to E_t, a "stop timing" signal must be generated. The capacitor potential tends to move through the operative point E_t comparatively slowly and trigger circuits should be included, so that the beginning and end of the timing cycle are clear and well-defined. The potential measuring circuit should constitute no load on the capacitor, otherwise the discharge rate is modified. Preferably E_t should be a fixed fraction of E_o, so that variation in applied potentials does not affect their ratio.

A number of circuits was investigated and the "single-shot" multivibrator shown in Fig. 1 was found to be the most useful. Valve $V2$ is normally conducting, since its grid is held at earth or cathode potential by the diode D. Part of the potential fall in the anode load resistor is transferred by a divider system to the grid of $V1$, holding this valve in a non-conducting condition. A sharp positive pulse applied to the grid of V_1, e.g., by closing switch S, causes the system to move rapidly to the condition wherein $V1$ is conducting and $V2$ cut off. C corresponds to the unknown capacitance in Equation (1) and the disturbing potential E_o is provided by the sudden shift of the anode of $V1$ towards the negative. The capacitor discharges through R_g (equivalent to R in (1)) until the potential of the point X reaches the lower cut-off potential of $V2$. Then the system reverts rapidly to its original condition. The purpose of R_v is discussed later.

The circuit fulfils the main requirements mentioned above. During the discharge period, the grid of $V2$ is considerably negative and does not constitute a load on the capacitor. Moreover, the on-and-off pulses are sharp and clean. It is difficult to measure the actual values of E_o, E_t, but this is unimportant as long as their ratio remains substantially constant. It is essential that the system should be stable and should have a linear response. The extent to which these criteria are realized is discussed in the next section.

Scale Shape

The operative elements of the circuit are shown in Fig. 2. R_a represents the internal resistance of $V1$ including R_v; other symbols are as Fig. 1.

$$E_b = R_a i_a + R_1(i_a - i_g) \quad \ldots\ldots (3)$$

$$E_b + v = R_a i_a + R_2 i_g \quad \ldots\ldots (4)$$

$$\text{Writing } R_s = R_a R_1/(R_a + R_1) \quad \ldots\ldots (5)$$

$$R_a E_b/R_a + v = i_g(R_s + R_2) \quad \ldots\ldots (6)$$

$$= C\dot{v}(R_s + R_2) \quad \ldots\ldots (7)$$



Fig. 2
The measuring element of the circuit shown in Fig. 1

$$= K\,EXP.\ -t/C\,(R_s + R_g) \quad \ldots\ldots \quad (8)$$

If the circuit values are so chosen that the measured discharge period is of the order of 0.1 sec. or more, the switching time can be neglected. At $t = 0$, $v = E_b$.

$$\text{Hence } K = E_b\,(R_s + R_a)/R_a \quad \ldots\ldots\ldots\ldots \quad (9)$$
$$= E_c \text{ (Equation (1))}$$

The system reverts to normal when the potential at X reaches the cut-off of $V2$.

$$\text{i.e., } R_g i_g = E_b + E_{co} \quad \ldots\ldots\ldots\ldots\ldots\ldots \quad (10)$$
$$R_s E_b/R_a + v_t = (E_b + E_{co})(R_g + R_s)/R_g \quad (11)$$
$$= E_t \text{ (Equation (1))}$$

The cut-off potential of the valve is largely proportional to the applied anode potential. Hence if E_{co} is written $p\,E_b$, Equation (1) becomes:

$$t = C(R_s + R_g)\log\left(\frac{1}{1+p}\cdot\frac{R_g + R_a}{R_a}\cdot\frac{R_g}{R_g + R_s}\right) \quad (12)$$

The capacitance scale is therefore of the required form, i.e., with R_g constant, $C = kt$. This is confirmed by the measured values shown on A, Fig. 3. Closer observation reveals a slight curvature due to strays which have been neglected on Fig. 2.

The resistance scale suffers from two defects. As long as R_g is large compared with R_s, the relationship is useful and linear. The R_s term in the first bracket displaces the line, so that its projection does not pass through zero. Moreover, as R_g is decreased until it becomes comparable with R_s, the final log. term diminishes, generating a curvature towards the origin. These details are illustrated by the observed values, shown in B, Fig. 3, and in the enlargement of the curved portion shown in C.

Precision Measurements

Very accurate measurements of capacitance and resistance can be obtained by measuring the discharge time by means of an electronic chronometer.[3]

It is doubtful whether the measurements described herein would, of themselves, justify the installation of a chronometer. It is believed, however, that this instrument will become a standard feature of most laboratories in the near future, because of its value in other directions. The capacitance and resistance measuring unit would then be in the nature of an accessory.

The chronometer consists of three parts; an accurate pulse source, which is usually a 100 kc/s. crystal controlled oscillator; a digital type electronic counter, and a gate which controls the passage of pulses from the oscillator to the counter. The timing circuit is connected to the gate in such a manner that pulses are allowed to pass only during the switched period of the multivibrator. The reading on the counter then indicates the required discharge time. Pentagrid valve $V3$ in Fig. 4 constitutes the gate. The point A is connected to the normally conducting anode of the multivibrator by a potential divider system, so that the inner grid of $V3$ is held at a substantially negative potential while the system is at rest. During the switched period the potential of this grid is made more positive, the capacitor causing it to follow the movement of the multivibrator anode. Pulses from the oscillator applied to another grid of $V3$ are freely transmitted to the counter until the system reverts to the normal condition.

For the measurement of capacitance, the multivibrator must include fixed resistances corresponding to R_g of such value that k in Equation (2) becomes unity. Several values can be included, each representing a different capacitance range. The optimum number of ranges depends on the number of significant figures available on the counter. With an instrument of five decades, two ranges, 0.001-0.1 μF and 0.1-10 μF, have proved sufficient. For a lesser number of digits it is convenient to limit each range to a 20 db. coverage. With these limits, correction

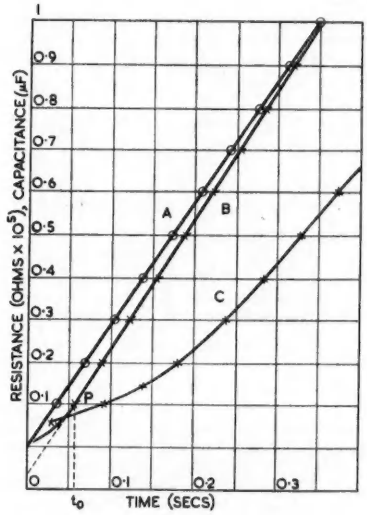

Fig. 3
Defects observed in resistance measurements
A : Time/Capacitance (R_g = 100kΩ)
B : Time/Resistance (C = 1μF)
C : Lower part of B × 10

can be made for the slight lack of linearity in the characteristic mentioned earlier.

The resistance values can be determined experimentally. A standard capacitor of the required full scale value is connected to the unit, and the resistance value adjusted until the desired reading is obtained on the counter. The valve compensation mentioned later should be approximately central. If the checking capacitor is of the decade type, the unit can be tested over the full range and errors due to non-linearity balanced. The range switch is of the wafer type with connexions as shown in Fig. 5. A 10 kΩ resistor is in series with one pole of the switch

and this must be in circuit when the range resistances are being determined.

For resistance measurements the lower bend of the characteristic shown in Fig. 3 must be obviated. This is effected by giving R_g an artificial zero in the form of the 10 kΩ resistor mentioned in the previous paragraph, which value must be deducted from the counter reading. Alternatively, an additional "single-shot" multivibrator can be inserted to delay the beginning of timing by an amount shown as t_0 on Fig. 3. The effect is to shift the origin to the point P so that resistance readings are given directly. Two resistance ranges are suggested, one 100 kΩ full scale, the other 10 MΩ. The internal capacitors are determined experimentally and wired as shown on Fig. 5.

Allowance must be made for valve ageing and replacements. In Equation 12 the valve affects two terms, R_a and p. The former represents a significant variation, and compensation has been inserted in the form of variable resistor R_v in series with the anode of $V1$. A range of about 2 kΩ is sufficient to cover most valves of the specified type. Variations in p, representing changes in the grid cut-off potential of the valve, are not so important, since p is very small and is largely masked by the unity in the same term. A single compromise adjustment on R_v is sufficient to cover both variations.



Fig. 4
"Gate" circuit between oscillator and counter

One position of the range switch is used for adjusting R_v. The operation virtually consists of measuring the capacitance of one of the included capacitors. This is a fixed and known value, and if a valve has been changed, it is a simple matter to adjust R_v until the original reading is obtained, since it should be constant for any given instrument. Another position of the range-change switch can be used for adjusting the zero delay when this is fitted. The external terminals are short-circuited within the instrument, and the time delay is reduced until the counter just reads zero.

Performance

The system includes no moving parts, and the accuracy depends entirely on the stability of the components used. Temperature changes are the main disturbing factor, but with suitable choice of equipment a variation less than about 4 parts in 10^5/°C. can be obtained.

The assumption that p (12) is a constant is not completely justified. The return switching action does not take place until the overall amplification of the system exceeds unity. Due to the lower bend in the valve operating characteristic, this does not occur at the true cut-off point and the switched time is dependent to some extent on supply potentials. For precision readings, therefore, these must be stabilized. Elaborate control is unnecessary since the time variation is only a very small proportion of the potential change. Mains ripple leads to erratic results, and the smoothing should be as efficient as possible. Other fluctuations were traced to the filament supply, although indirectly heated valves were used. The heater current should be derived from accumulators for the highest accuracy.

The effect of potential changes and random fluctuations has been considerably reduced by connecting the charging resistances R_g to the positive potential instead of to the cathode as is usual in multivibrator practice. The slope of the discharge curve at potential E_t is increased by a factor of about 4 or 5; the time change for a given potential fluctuation is decreased in the same ratio.

It was found difficult to obtain constant readings on a valve taking appreciable grid current, probably due to heating of the grid spiral. A series grid resistor is added to overcome this difficulty, but has the effect of allowing the point X (Fig. 1) to become positive. The diode D is introduced to hold this potential and to still further reduce grid current.

With the plate potential stabilized and heaters taken from the mains (via transformer), no difficulty was experienced in maintaining an accuracy of 0.1 per cent. With accumulator supply to the heaters, the maximum variation over a run of several hours was ±0.03 per cent. The residual variation was probably due to direct pick-up, since it appeared to coincide with the working of adjacent apparatus which was not entirely spark-free. The effect is fundamental to all trigger type circuits, and the only solution is complete shielding, together with adequate smoothing on all incoming wires.

The above results were taken on a switched time of 0.35 sec. As this period is reduced, the percentage variation is increased and the finite switching time becomes important. Experiments are being

Fig. 5
Correction circuit for the non-linearity shown in Fig. 3

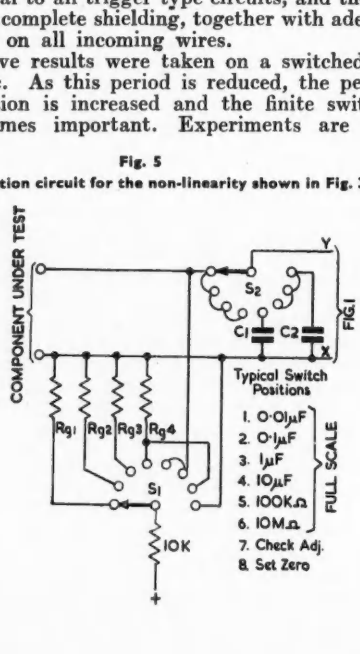

conducted with an H.F. pentode pair to determine the minimum switching time.

Tolerance Measurements

Precision measurements of the type described are required in comparatively small numbers. The majority of capacitors produced are for such purposes as smoothing, speech transmission, spark-quenching, etc., where the capacitance tolerance is wide, ±10 per cent being quite common. For such measurements, a modification of the instrument has been designed which gives a rapid, direct indication whether a capacitance is within a given range, usually expressed as a negative and positive percentage tolerance on a specified nominal value.

It is unnecessary to determine the actual switched time of the multivibrator, so that a gate circuit and chronometer are not required. Instead, the time is compared with two known values, T_n and T_p, representing the negative and positive time equivalents of the capacitance tolerances. The two preset time devices, in effect, constitute an electronic "go/no-go" gauge, so that for a good capacitor $T_p > t > T_n$.

In Fig. 6 the three lower units marked *N*, *O*, *P* represent multivibrators similar to that shown in Fig. 1. The nominal time T_o can be made any value, a convenient figure being about 0.35 sec., corresponding to a 1 μF capacitor associated with a 100 kΩ resistor. The R_g resistance forming part of the *N* unit is in the form of an 80 kΩ fixed and 20 kΩ variable; that of *P* is 100 kΩ and 20 kΩ variable. Over the range covered, resistance is substantially linear with time, so that the dials on the variable resistors can be scaled directly as percentage decrease and increase of time T_o. A selector switch associated with the *O* unit enables a number of resistances to be connected, so that the time T_o corresponds to a different nominal value of capacitor for each switch setting. 100 kΩ corresponds to a capacitance of 1 μF; other resistors might give 0.1 μF, 2 μF, etc.

The three multivibrators are switched simultaneously, the order of release being determined by the upper elements *A*, *B*, *C*. These are Eccles-Jordan toggles of conventional design,[4] with two stable positions. An external switch (not shown) restores all three to the normal or "reset" position prior to each test. The neon-tube associated with each toggle glows to indicate the operated or "set" condition. The arrowed connexions represent pulse operation paths, the pulse being emitted as the originating element returns to the normal condition.

Consider the sequence when a capacitor below the permitted tolerance is connected to *O*. The lower units release in the order *O*, *N*, *P*. *A* receives its "reset" pulse before being "set" by *N*, and therefore remains in the "set" condition. The glowing of the associated neon-tube indicates "capacitor below tolerance." If the capacitor under test is above the range permitted, the sequence terminates with *B* "set," the glowing of the neon-tube giving the appropriate signal. Only if the component under test lies between the specific values, i.e., if the units release in the order *N*, *O*, *P*, can the *C* toggle be "set" to indicate a useful capacitor.

Acknowledgment

This investigation was carried out in the Strowger Laboratories, Liverpool. The author wishes to thank the Chief Engineer of the Automatic Telephone & Electric Co., Ltd., for permission to publish this material.

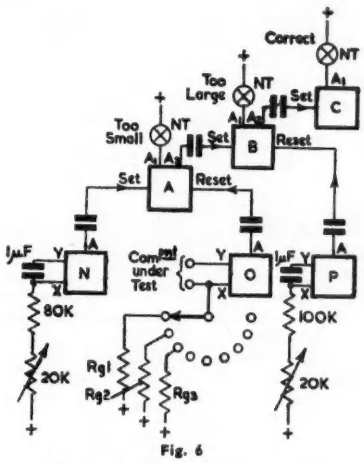

Fig. 6

Elements of the comparator circuit

References.

[1] R. S. J. Spilsbury and A. Felton: *J. Inst. Elect. Eng.*, *94*, p. 284 (June 1947).
[2] S. S. West and L. C. Bentley: *Electronic Engineering*, *19*, p. 207 (July, 1947).
[3] G. T. Baker: *J. Scientific Instruments*, *25*, p. 194 (June, 1948).
[4] G. T. Baker: *Ibid.*, p. 128 (April, 1948), Fig. 4.

New O.B. Television Transmitter

Television outside broadcasts from places not served by the special television cable will be considerably facilitated when this new transportable television transmitter, designed and produced by Marconi's Wireless Telegraph Co., Ltd., is brought into service by the B.B.C. Due to its small size and modest power requirements it can be installed in a single vehicle, which will carry also the fire-escape type extensible ladder for supporting the aerial.

The new double-sideband transmitter is designed to radiate 350 watts within the frequency range 174 to 216 Mc/s.

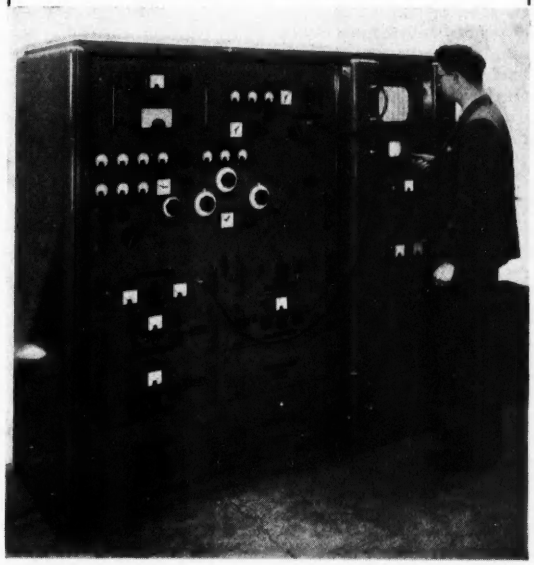

Time Base Expansion and Compression Circuits

for varying Trace Speed during time of sweep

By D. M. MACKAY, B.Sc.

(Wheatstone Laboratory, King's College, University of London)

THE Miller time base circuit, using a single valve, has already been described many times and in particular in *Electronic Engineering* for August 1948.[1] During the war the writer devised a number of methods[2] for varying the speed of sweep of the Miller time base at selected points during the sweep period, thus producing either an expansion or compression of part of the trace. A description of some of the experimental circuits may be of interest, the principle being equally applicable to all capacitor-controlled time bases.

In Fig. 1, C is the "Miller" capacitor, and the time of sweep is controlled by the values of R_g and C, with C_1 and R_1 in series across C. The value of R_1 is preferably some two or three times that of R_a, the anode resistance, (for reasons which will be seen later), and must be small compared with R_g. From the junction of R_1 and C_1 a diode is connected to earth through a potentiometer P which determines the diode anode voltage V_1.

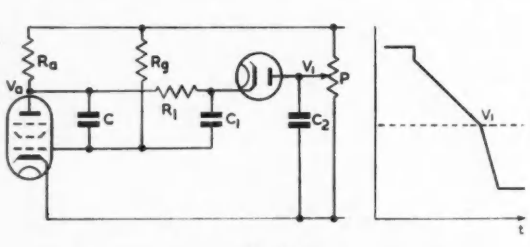

Fig. 1

Simple speed changing circuit producing an increase in speed at a selected voltage

Typical values (with EF50):

R_a=47k, R_g=3.3M, R_1=100k.
C, C_1 according to speeds required
C_2=8μF, P=100k

When the anode potential V_a falls to that of the diode (V_1) the potential across C_1 is clamped by the action of the diode and the effect of C_1 on the sweep velocity practically ceases. R_1 then becomes an additional anode load across R_a (hence the requirement that it should be two or three times as great), and the sweep continuous at a speed determined only by C and R_g. The effect is shown by the waveform adjoining the circuit diagram, which gives a sudden increase in speed of sweep beyond the point marked V_1.

A fast sweep changing to a slow one is provided by the circuit of Fig. 2. C_1 is connected across C through a diode D_1, the anode potential of which is determined by R_1 and P. When D_1 is non-conducting, C_1 has practically no effect on the sweep speed, but when the potential V_a falls below V_1, C_1 discharges through D_1 in parallel with C and thus slows down the sweep. At this stage R_1 is again effectively in parallel with R_a, and the value should therefore be kept high as before. The waveform is shown adjacent to the diagram.

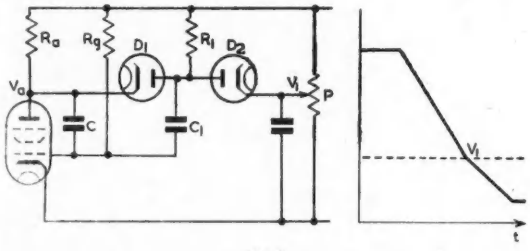

Fig 2

Double-diode circuit giving a decrease in speed at the required voltage

If the diode of Fig. 1 is reversed in connexions, a single diode variant of Fig. 2 is obtained, which has the same effect on the sweep speed. R_1 in this case is present initially as an additional anode load.

For compressing a portion of the scan, the circuit of Fig. 3 may be used. This is a combination of the principles of the preceding circuits. C_1 has no effect until V_a falls in potential to V_1, when D_1 ceases to conduct. C_1 then discharges through R_1 (which is small compared with R_g) until the potential V_a falls below V_2. At this stage D_2 conducts and clamps C_1 once

Fig. 3

Circuit for compressing a central portion of the trace

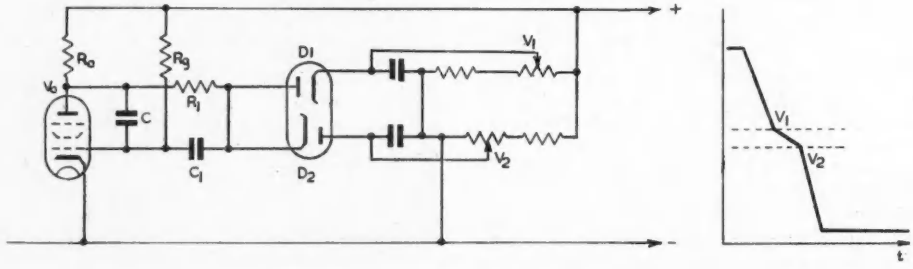

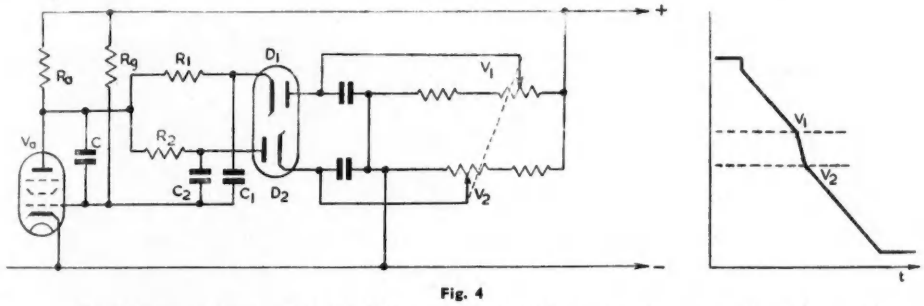

Fig. 4

Circuit for expanding a central part of the trace. $C_1 = C_2$ f the time-base is to resume its original speed

more, enabling the sweep to be resumed at its original speed.

Finally, the circuit of Fig. 4 can be used to expand a portion of the sweep. In this, C_1 slows down the sweep until V_a falls in potential to the value V_1, when D_1 clamps C_1. The sweep then falls at a rate governed by C and R_g. When V_a reaches V_2, D_2, which has been conducting, ceases to clamp C_2, and the sweep is again slowed down. If $C_1 = C_2$ and $R_1 = R_2$ the slope will resume its original value. The expanded portion may be moved up and down the time base by adjustment of V_1 and V_2 with a ganged potentiometer.

The foregoing, of course, represents a much-simplified description of the action of the circuits, but is adequate if the approximations mentioned are valid.

References

[1] Briggs B. H. "The Miller Integrator", *Electronic Engineering* 20, 243, 1948.

[2] MacKay D. M. "Improvements in or relating to Timebase Generators and Cathode-ray Oscillographs." Admiralty Patent No. 592372

The Videograph

A New Instrument for Home Entertainment

UP to now instruments for home entertainment have been produced as separate articles, with little or no attempt to incorporate them one in the other, and there is thus much waste of space, efficiency and money, if one purchases the units separately, and they rarely seem to go well together artistically. The possible exception is the radiogram which at least combines two uses in one, with considerable saving.

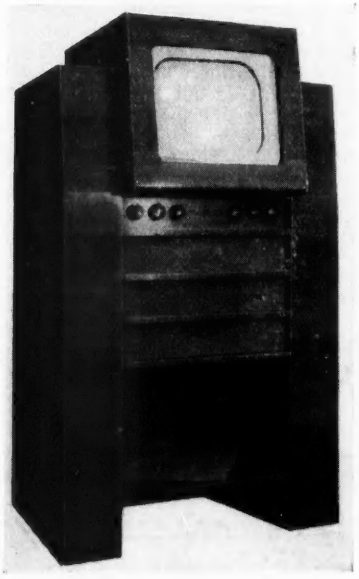

This view of the prototype model of the "Videograph" shows a promise that the futuristic interior will be encased in a smart exterior. The shoulders of the cabinet hold the "shorts" (both film and cocktail)

The logical extension of the radiogram idea was the addition to the television receiver of facilities to view recorded programmes, i.e., films; and thus was formed the "Videograph."

A typical model is shown, and consists of a normal television receiver, with the addition of a simple mechanism for running 16 mm. talkie film in front of a small electrostatic C.R.T. which scans through it on to a photoelectric cell and electron multiplier, the output of which can be switched into the video output of the receiver. The film runs smoothly, thus eliminating the complicated part of normal projectors, and is pulled by a small synchronous motor. The scanning potential for the electrostatic tube is obtained from the grid of the line output valve, ensuring automatic line lock, and the frame is locked by a novel method to the mains, ensuring automatic frame lock. Sound is picked off as usual, and is reproduced through the sound receiver. Later models will probably pick up sound by means of an iron dust, or wire, thread let into the film. This will make sound pick up much simpler.

All the film equipment is housed in one of the "shoulders" of the cabinet, which hinge open for loading in film, etc. Incidentally the other shoulder is a well stocked cocktail cabinet, surely a necessary part of a home entertainment device! Several record companies are planning to market recorded programmes, with subjects ranging from simple cabaret acts (dancing, singing, conjuring, etc.) to travel items, plays, instructional records, such as music lessons, engineering training, carpentry demonstrations, gardening, etc., and it is expected that public libraries will handle them on a loan basis, as they do at present with the (now) old fashioned printed books.

Our visionary contributor concludes with the regretful comment that there is, of course, no such thing as a Videograph—yet.

An improved

Insulation Resistance Bridge

By A. F. BOFF, B.Sc.

(Late of Standard Telecommunication Laboratories, Ltd.)

A robust self-contained instrument is described which permits rapid measurement of resistance in the range 10^8-10^{14} ohms. The test voltage may be varied continuously up to 500 volts, thus enabling voltage co-efficients of resistance to be determined

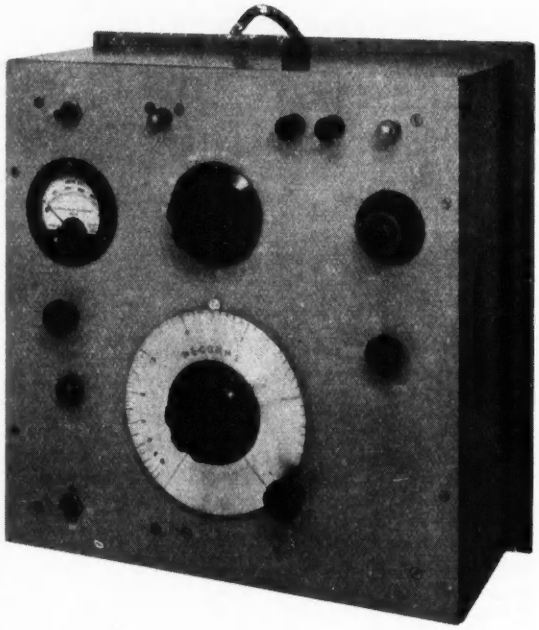

THE development of new insulating materials and the investigation of the electrical properties of textiles require measurements of resistivities approaching 10^{17} ohms-cm. For a sample 1 mm. thick having an electrode area of 100 cm.^{2}, the resistivity figure quoted corresponds to an actual resistance of 10^{14} ohms. Measurement of such a high value of resistance presents special difficulties which are not encountered when measuring lower values. The present methods in general use include: (a) Measurement of the steady current through the sample, when subjected to an electric stress, by means of a supersensitive galvanometer, and (b) ballistic measurement of the residual charge in a capacitor which has been allowed to discharge through the sample for a measured time. In most practical cases the sample may be subjected to a potential difference of 500 volts. When it is calculated that 500 volts across 10^{16} ohms cause a current of 0.000005 μA, the delicacy and limited range of method (a) is evident. In addition, it is impossible to protect the galvanometer effectively from current surges due to breakdown of the specimen. Method (b) requires a first-class capacitor and a sensitive galvanometer. It is laborious and measures only the average value of resistance over a voltage range. Voltage coefficients of resistance (often very considerable at high ohmic values) must therefore be estimated by measurements over successive voltage ranges as close together as sensitivity requirements will permit. The Wheatstone Bridge circuit would be suitable for high resistance measurements if the detector impedance were sufficiently high (preferably high compared with the greatest value of resistance to be measured), and had adequate sensitivity. Since the advent of the electrometer valve, several investigators have employed bridge methods, but owing, perhaps, to the numerous separate battery supplies used and the usually rather intricate setting-up procedure for devices designed to compensate for supply fluctuations, bridges for very high resistance measurement do not appear to have been universally adopted.

The method described here involves no new prin-

Fig. 1.
Schematic of the bridge



Fig. 2.
Balance detector (Terminals isolated from earth)

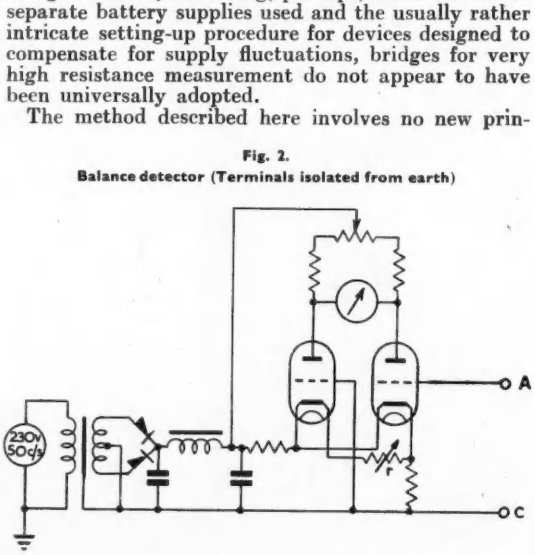

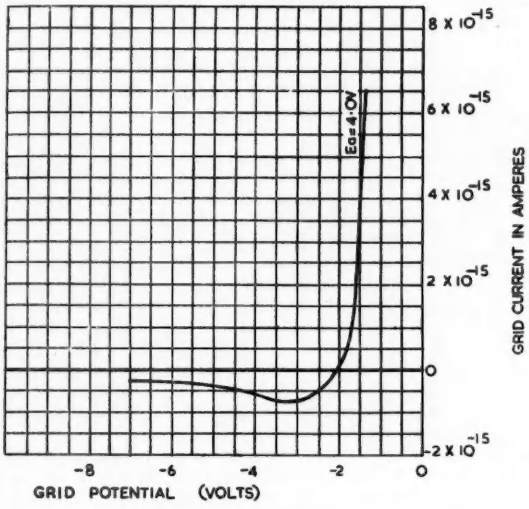

Fig. 3.
Grid current characteristic of average electrometer valve type ET 1

ciples, but represents a considerable simplification of technique without sacrifice of stability or accuracy, and permits rapid measurement of resistance up to 10^{14} ohms (corresponding for a convenient sample to a resistivity of 10^{17} ohms-cm).

Description of Apparatus and Circuits

The difficulties peculiar to the measurement of very high resistance are, in general, due to:—

Instability of the electrical circuits forming the detector.

Grid current flowing in the detector input circuit.

Time constants of the bridge arms.

Leakance across the high resistance arms of the bridge.

The following sections deal with these difficulties together with the means by which they have been overcome or reduced in this new instrument.

It is desirable that the high voltage supply should have one pole at earth potential and also that the resistance under test should be earthed at one end to facilitate screening. Since variable high resistances are not practicable, two arms of the bridge must be low. Maximum sensitivity will be obtained if the detector is connected between the junctions of the two high resistances and the low resistances. The basic circuit, therefore, becomes that of Fig. 1 where the point *D* is at earth potential, *R*3 is the unknown high resistance, *R*1 is the internal standard and *R*2, *R*4 are low resistance arms.

Fig. 4.
Polythene switch (approximately quarter scale)

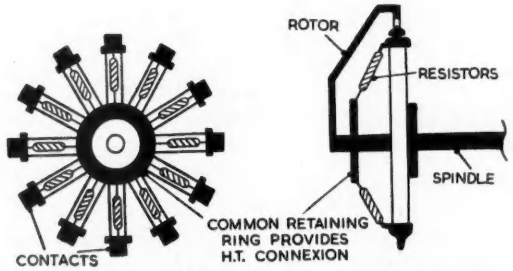

(a) SHOWING POLYTHENE SPOKES, COPPER CONTACTS & RESISTORS. THE ROTOR IS OMITTED

(b) SIMPLIFIED SIDE ELEVATION SHOWING POSITION OF RESISTORS & ROTOR

The Detector

The ideal detector would combine high sensitivity and inherent stability with respect to both electrical and mechanical disturbances. In addition, it would cause no shunting of the bridge arms nor pass current through them. It is well known that a thermionic valve, although presenting an impedance normally considered high, is limited to a few megohms by the existence of a finite grid current. This is not the familiar electronic current which flows when the control grid is made positive with respect to cathode, but a positive ion current existing when the grid is sufficiently negative to repel all electrons.

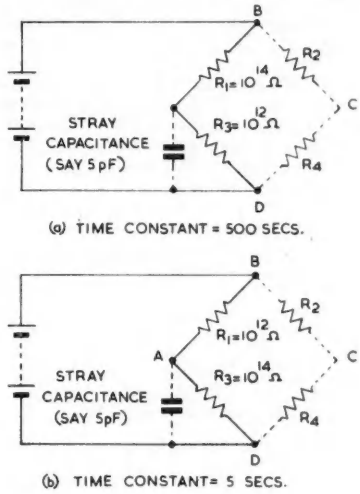

Fig. 5.
Showing how disposition of bridge arms affects charging time

The causes of this current have been listed by Metcalf and Thompson[1] as being:—

(1) Leakage over insulation.
(2) Ions formed by gas present in the valve.
(3) Thermionic grid emission due to heating of grid by the filament.
(4) Ions emitted by the filament.
(5) Photoelectric emission by control grid under action of light from filament.
(6) Electrons emitted by control grid under action of soft X-rays produced by normal anode current.

Item (1) may be effectively cancelled by means of guard rings and item (6) reduced by use of a low anode voltage,[2] but the remaining items depend solely on the valve design and manufacturing technique.



Fig. 6.
Conventional Wheatstone bridge

There are a number of specially constructed valve types now available, generally called electrometer valves,[3,4] in which the grid current has been reduced to a very low value. A typical curve showing grid current as a function of grid potential for one of these types is given in Fig. 3. It will be noted that at one value of grid potential the electron current and the positive ion current are equal, and there is zero resultant current. It has been found possible to work at this point over short periods, but the exact point is not sufficiently stable for general use and it has been found more satisfactory to accept the small residual positive ion current.

The circuit of Fig. 2 shows two electrometer triodes comprising a balanced detector system which is

Fig. 7.
(a) Inverse scale shape
(b) Constant accuracy scale

virtually independent of supply fluctuations. The valve filaments and anodes are supplied from a common D.C. line derived from the mains. If both triodes are identical, no out-of-balance results due to changes in supply. In practice the over-riding factor affecting the matching of the valves has been found to be the filament temperature. For this reason a variable resistance (r in Fig. 2) has been included. When correctly adjusted, the balance is undisturbed, apart from a slight relative thermal delay in the filaments by supply variations of up to ±20 per cent. Changes due to mechanical disturbances are effectively avoided by use of soft rubber anti-microphonic mounting for the valves. It will be seen that terminal C of the detector has a path to earth by way of the insulation of the mains transformer. A good impregnated mains transformer has an insulation resistance greater than 500 megohms and C may, therefore, be connected to the low resistance junction without detectable effect.

The Bridge Arms

To provide adequate sensitivity, when testing at low voltages, without resort to a sensitive galvanometer, the maximum ratio of unknown to standard was limited to 100. This implied the use of internal resistors covering the range up to 10^{12} ohms. Special sealed resistors, available commercially, were found suitable for this purpose, especially since the maximum voltage to which they were subjected (50 V) fell within the range over which, it was claimed, they had negligible voltage coefficient of resistance.

To carry the resistors, without introducing leakance, a twelve position switch was constructed, having radial spokes of polythene and a rotary contact arm (Fig. 4). The spring contacts of the latter were designed to automatically centre the polythene spokes to avoid warping. All corners and sharp edges were smoothed to avoid unwanted ionization. An important factor in the disposition of the bridge arms is concerned with time constants. When it is considered that a capacitance of 5 pF associated with a resistance of 10^{14} ohms has a time constant of 500 seconds it is seen that the problem is not easy. A large time constant may completely mask the balance point, since fluctuations of the high voltage supply or movements of the operator (which slightly modify the stray capacitances) cause random displacement of the balance indicator, at a rate exceeding that at which they can be accommodated by the circuit. In the design of the high insulation terminal and the range switch, capacitance has been kept as low as practicable. However, in use considerable capacitance is often inherent in the specimen. The time constant resulting from a given capacitance is greatly influenced by the relative positions of the high resistance arms of the bridge. The effect is demonstrated in Fig. 5, where it is shown that a 100 to 1 improvement results if it is arranged for the stray capacitances to be charged through the lower resistance. The low resistance arms of the bridge are by no means critical, but to avoid unnecessary drain on the high voltage supply the resistances should be as high as practicable. For a continuously variable wire wound potentiometer this sets an upper limit of 500 kΩ which may be chosen as the low resistance arm. A circuit

Fig. 8.
Bridge ratio arms showing scale shape network

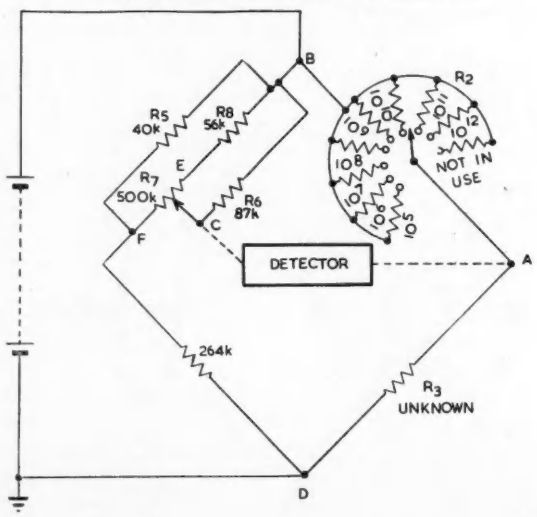

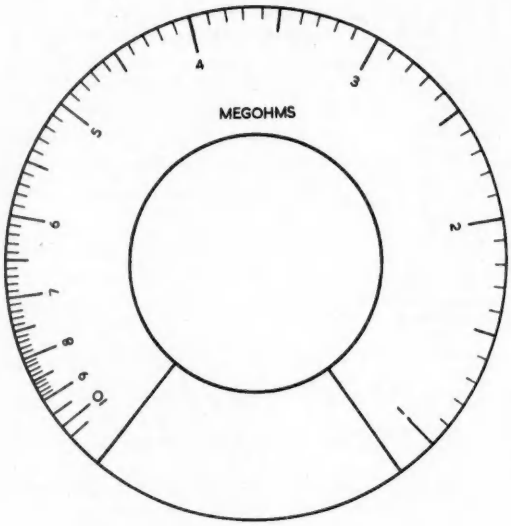

Fig. 9.
Actual scale shape in this instrument

of the type sketched in Fig. 6 has an inverse relation between the resistance $R2$ and the unknown $R3$, whereas, for constant accuracy of reading, a scale shape is required based on the law $R2 = Ae^{K\theta}$, where θ is the angular motion of the balance dial. Both scales are produced in Fig. 7 for comparison.

A close approximation to the ideal scale shape may be achieved by means of the network detailed in Fig. 8. Design of such a network is simplified by regarding *BC* and *CD* as a potentiometer across the high voltage supply. $R5$ is chosen to provide the maximum voltage required across arm *CD* of the bridge when the moving contact *C* is at *E*, while $R6$ must be selected so that when *C* is at *F*, the correct minimum voltage is obtained. Although the five resistors comprising *BC* and *CD* are interdependent, in practice the scale shape is governed, primarily, by the ratio $R7/R6$. Resistors $R8$ and $R5$ control the range and are finally adjusted during calibration. The technique is based on a method described elsewhere[5] and the resultant scale shape is shown in Fig. 9. The moving contact *C* is connected to terminal *C* of the detector and to the guard rings of the high insulation terminal and the electrometer valves.

High Voltage Supply

Owing to the very stringent conditions arising out of the time constant problem discussed in the preceding section, a mains operated source for the high voltage was not considered practicable. A battery power pack was, therefore, built into the equipment. The pack consisted of 15 miniature batteries (nominally 45 V each), occupying a total space of approximately 4 in. by 4 in. by 10 in. The maximum load on the batteries is only 2.5 mA and at the time of writing the equipment has been in regular laboratory use for almost twelve months without requiring replacements. The voltage applied to the bridge circuit is continuously variable and is indicated on a voltmeter incorporated in the apparatus to facilitate measurements of voltage coefficients of resistance.

Calibration and Accuracy

The variable bridge arms *BC* and *CD* were accurately calibrated in terms of external standard resistances of relatively low ohmic value, but the very high resistances, utilized for comparison with the unknown arm, presented considerable difficulty in the absence of known standards of comparable values. When in use in the circuit, these resistances may be subjected to any potential difference up to 50 volts. A calibration method, therefore, should not apply a stress exceeding this value and should, in addition, check the voltage coefficient effects over this range. The procedure adopted was as follows: each resistor was measured in terms of resistors one and two decades lower, using the accurately known low resistance arms *BC*, *CD*. Values not exceeding 100 megohms were measured on a precision Wheatstone Bridge.

Fig. 10. Complete circuit diagram

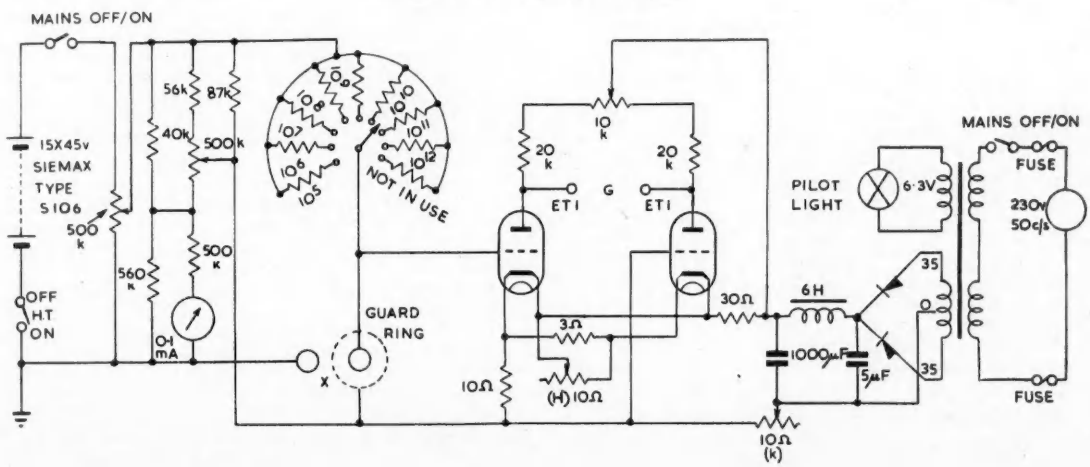

A progressive error would apply to each succeeding decade, but it is estimated that all internal resistors are known to approximately 2 per cent. The measurements were checked by other methods and found to agree within the experimental errors associated with the particular method employed. The detector system has a sensitivity of 16 μA/volt. When a test potential of 500 volts is employed a change of 1 per cent in the unknown will produce a current of 0.8 μA. For normal measurements, therefore, a 0-50 μA moving coil instrument is sufficiently sensitive to permit balance within the accuracy of the internal standards. A portable galvanometer, having a sensitivity of 26 mm/μA has been used with success for measurements at very low test voltages.

REFERENCES AND BIBLIOGRAPHY

[1] G. F. Metcalf and B. J. Thompson. A Low Grid Current Vacuum Tube. *Phys. Review*, 36, 1489 (1930).
[2] C. E. Nielsen. Measurement of Small Currents: Characteristics of Types 38, 954, 959, as Reduced Grid Current Tubes. *Review of Scientific Instruments*, 18, Jan., 1947.
[3] G. W. Warren. The Electrometer Triode and its Application. *G.E.C Journal*, May, 1935.
[4] J. A. Darbyshire. A New Electrometer Valve. *Electronic Engineering*, September, 1946.
[5] A. F. Boff. The Use of Standard Linear Potentiometer to give Inverse or Reciprocal Scales. In press.

A Super-Sensitive Amplifier for Measuring Small Currents. F. J. Moles, *G.E.C. Review*, March, 1933.

One Tube Balanced Circuit for D.C. Vacuum Tube Amplifiers of very Small Currents. Walter Soller, *Review of Scientific Instruments*, August, 1932.

An Electrometer for Measurement of Voltage on Small Ionisation Chambers. F. T. Farmer, *Proc. Phys. Society*, Part 6, September, 1942.

Condenser Chamber Measuring Apparatus. Spiers and Hay, *British Journal Radiology*, May, 1946.

Procedures in Experimental Physics. J. Strong (1945). Prentice-Hall.

How humidity Affects Insulation. *General Radio Experimenter*, July and August, 1945.

A Sawtooth Generator for Oscilloscopes

ONE major difficulty in the design of sawtooth voltage generators for oscilloscopes is the development of a circuit which is linear at the commencement of the sweep. A further difficulty is in the design of a generator whose waveform at the commencement of the forward stroke is not influenced by the shape of the triggering pulse.

The circuit of a generator which has been found to overcome these difficulties is shown in the Figure.

The capacitor *C*1 is alternately charged and discharged to form the flyback and forward strokes respectively. The discharge is through valve *V*1 which has strong negative feedback via its cathode resistor *R*9 causing it to behave as a constant current device. Valves *V*3 and *V*4 form an unstable amplifier of wide band width using a constant current valve *V*5 (similar to *V*1) as the common cathode impedance, and cause *V*2 to conduct and charge *C*1 for flyback strokes. Synchronizing signals may be applied via *V*6. Output is taken across *CD*.

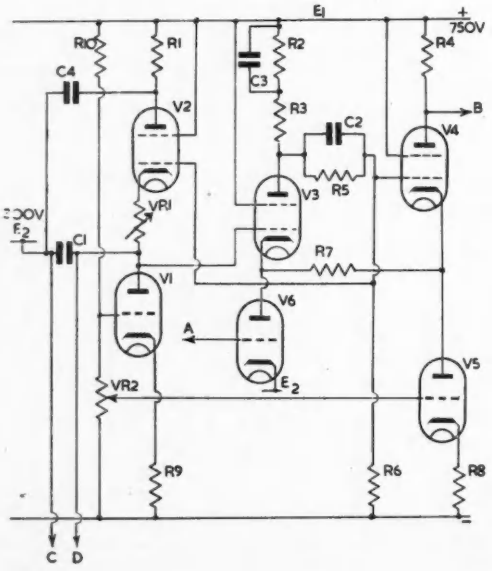

The operation of the circuit may be described as follows. Consider *V*2 and *V*4 to be cut off with *V*3 conducting. *C*1 will be steadily discharging through *V*1 producing the forward stroke of the scan. When the voltage on the anode of *V*1 has fallen to a sufficient extent it will cause *V*3 to stop conducting and its anode voltage will rise. This rise is transmitted by a D.C. connexion to the grid of *V*2 which starts conducting and quickly charges *C*1 (flyback stroke). It is likewise transmitted to the grid of *V*4 which also commences to conduct and so maintains *V*3 non-conducting. When, however, the voltage on *C*1 has risen sufficiently *V*3 again conducts, its anode voltage thus falling and returning *V*2 and *V*4 to the non-conducting stroke. The circuit has now reverted to the original condition with *C*1 steadily discharging.

The conditions of the valves may be summarized:

	V_2	V_3	V_4
Forward Stroke	OFF	ON	OFF
Flyback	ON	OFF	ON

*VR*2 adjusts the bias on *V*5 and therefore serves as a fine control of repetition frequency.

Synchronizing pulses are applied to the grid of *V*6, a pentode which is biased to cut-off except when caused to conduct by a pulse at *A*.

If sufficient resistance is introduced by *VR*1, the voltage of *C*1, due to the constant drain of current through *V*1, may not reach a large enough value to turn *V*3 on at the end of the flyback. The operation will therefore cease until a synchronizing pulse makes *V*3 conduct and thus commence the forward stroke. In this way the circuit gives a single sweep and flyback, leaving the spot waiting at the start position of the sweep. Brightening pulses for this mode of operation may be taken from *B* to intensify the trace during the forward stroke. Due to the control of *V*2 by the coupled pair *V*3, *V*4, the trigger pulse once having caused *V*3 to conduct has no further influence on the operation of the circuit and cannot interfere with the linearity of the sweep.

It was found that the charge and discharge of *C*1 has a tendency to "pull" the voltages of the power supplies *E*1 and *E*2. The decoupling combination *R*1, *C*4 may be arranged to eliminate this effect.

—Communication from E.M.I., Ltd.

NOTES FROM THE INDUSTRY

The Manchester Electronics Exhibition 1950

The Fifth Annual Electronics Exhibition organised by the North Western Branch of the Institution of Electronics will be held at the College of Technology, Manchester, on July 18, from 2.30 p.m. to 9 p.m. and on July 19 and 20 from 10 a.m. to 9 p.m. Part of the Exhibition will be devoted to the interests of the amateur constructor and there will be demonstrations of television reception on receivers designed for home construction.

Admission will be by ticket obtainable from Mr. A. Hickson, 205 Parrs Wood Road South, East Didsbury, Manchester, 20.

Award of the Albert Medal

The gold Albert Medal of the Royal Society of Arts for 1950 has been awarded, with the approval of Her Royal Highness The Princess Elizabeth, President of the Society, to Sir Edward Victor Appleton, G.B.E., K.C.B., M.A., D.Sc., Sc.D., LL.D., F.R.S., "for outstanding services to science and industrial research."

Sir Edward Appleton, who is now Principal and Vice-Chancellor of Edinburgh University, was Wheatstone Professor of Physics at the University of London from 1924 to 1936, and Jacksonian Professor of Natural Philosophy at Cambridge University from 1936 to 1939. From 1939 to 1949 he was Secretary of the Department of Scientific and Industrial Research. He was awarded the Nobel Prize for Physics in 1947.

Scottish Television Station

The contract for the site works and the construction of the approach roads for the main Scottish television transmitting station at Kirk o'Shotts has been awarded to Messrs. McLean and Company of Wishaw, Lanarkshire.

This station will have a 750-foot mast similar to those at Sutton Coldfield and Holme Moss.

Birthday Honours List

Mr. G. M. Wright, B.Eng., M.I.E.E., Engineer-in-Chief of Marconi's Wireless Telegraph Co., Ltd., has been awarded a C.B.E. in the Birthday Honours.

Mr. Wright originally joined the Marconi Company in 1912, and his work as a Research Engineer and Consultant gained for him an international reputation.

At the outbreak of war he became Assistant Director of Scientific Research and Chief Scientist at the Admiralty Signal Establishment. He returned to Marconi's in 1946, and in November 1948 was appointed a Member of the Radio Research Board of the Department of Scientific and Industrial Research.

Danish Radio Exhibition

The Danish State Radio and Denmark's Radio Industry are arranging an exhibition in Copenhagen from August 11 to 20, to mark the 25th anniversary of the State Radio.

The exhibition, which will be under the patronage of H.M. King Frederik, will include radio and electrical measuring equipment, radio components, radio and television apparatus, and will demonstrate working television and music studios. Most of the products on show will be of Danish manufacture.

The Forum, the largest exhibition hall in Scandinavia, will be used for this exhibition.

B.B.C. Orders for Television Equipment

The B.B.C. has ordered four sets of television camera equipment, two from Marconi's Wireless Telegraph Company, Ltd., and two from Pye, Ltd.

Two of these equipments, each comprising a mobile control room with three operational cameras and associated equipment, will be used initially at the Festival of Britain next year.

The other two equipments, each providing three operational cameras with their control equipment, will be used for the new television studios at Lime Grove, Shepherds Bush, and for outside broadcasts.

Government Department Electrical Specification

The Technical Panel of the Engineering Standards Co-ordinating Committee concerned with cables and wires (Secretary: Ministry of Supply, I.E.M.E., "Aquila," Golf Road, Nr. Chislehurst Station, Bromley, Kent) has recently issued a 1950 edition of GDES.25—Natural Rubber and Polychloroprene Sheathings for Electric Cables and Flexible Cords.

The main difference from the 1948 issue is in the introduction of a tear resistance test and increase of the tensile strength requirements of general purpose natural rubber and polychloroprene compounds. There are a number of other changes.

Copies can be obtained from H.M.S.O. price 3d.

Education and Training of Laboratory Technicians

In recent years there has been a growing recognition of the importance of securing increasing numbers of well trained technicians in science laboratories, including research laboratories in industrial establishments, research associations and academic institutions, as well as laboratories for instructional purposes in universities, technical colleges and schools.

The City and Guilds of London Institute has considered the whole question of the training and certification of laboratory technicians on the broadest lines and a national basis, having recently adopted regulations and syllabuses for the "Laboratory Technicians' Intermediate Certificate Examination," which come into force in the academic session 1950-51.

The scheme has been prepared by the Institute's Advisory Committee on Laboratory Technicians' Work, upon which serve representatives of laboratory technicians, professional institutions, industry, the Ministries of Education and Supply, and associations concerned with technical education.

Copies of the scheme are available on request from the Department of Technology, City and Guilds of London Institute, 31 Brechin Place, South Kensington, London, S.W.7.

British Standards Institution Annual General Meeting

The Annual General Meeting of the British Standards Institution will be held on Tuesday, July 11, 1950, at 3 p.m., in the Council Room of the Institution at 24 Victoria Street, London, S.W.1.

Changes of Address

The Department of Scientific and Industrial Research has moved from Dorland and Rex House, Regent Street, to Charles House, 5-11 Regent Street, London, S.W.1. The telephone number remains Whitehall 9788.

New Electronic Products, Ltd., have opened new premises at Glasgow Terrace, Grosvenor Road, London, S.W.1, to which address all communications should be sent. The telephone number is Victoria 0884/5.

The offices of the Society of Relay Engineers have been transferred from 23 Dalkeith Place, Kettering, to Albion Road, Kettering, telephone Kettering 3422. The Secretary is Mr. T. H. Hall, M.Brit.I.R.E.

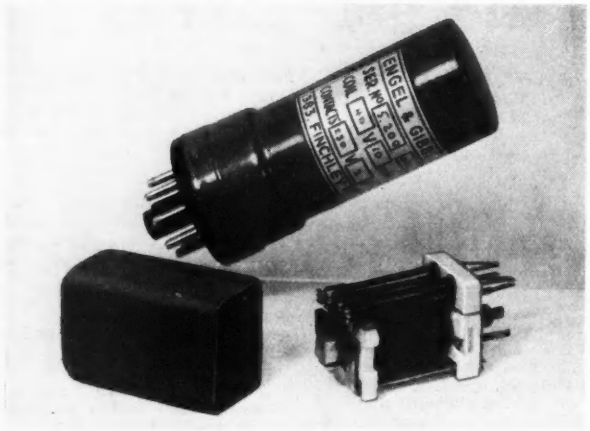

Electronic

A monthly record of British elec-
accessories, compiled from information

Plug-in Midget Relay

FITTED with aluminium cover processed to protect it from corrosion and adverse conditions encountered in the tropics, the relay is fitted with standard 8-pin international octal base. Rating and operating characteristics are shown on a side transfer. Circuit diagram and internal connexions are shown on a transfer fixed on top of the cover.

The relay operates on A.C. or D.C., the standard type requiring approximately 1.5W on D.C. and 4.5 V.A. A.C. to operate it. In the standard double-pole changeover version, the contacts are rated at 250 volts 3 amps. per pair non-inductive load A.C. 50 cycles. On D.C. the contacts are derated to 24V D.C. 3 amps or 200 volts D.C. 0.1 amp., where a suitable arc quenching circuit is arranged external to the relay.

Miniature Relay

THERE are two types, both the same physical size, the "dust cover" type and the "hermetically sealed" type.

This relay will operate on D.C. only and requires approximately 1W for standard operation. If A.C. only is available for control, a suitable rectifier and smoothing circuit has to be incorporated external to the relay. The contact arrangement is normally double-pole changeover type. The contacts are designed primarily for low voltage D.C. work, but will handle up to 300 mA, at 240V A.C.

The coil can be wound for direct operation on voltages up to 50V D.C. and for higher control supply voltages a series resistance is required.

The relay is suitable for chassis mounting and single-screw fixing is provided together with a series resistance if required.

Engel and Gibbs, Ltd.,
983/5 Finchley Road,
Golders Green,
London, N.W.11.

Magnetic Tape Recorder

(Illustrated below)

THE Cine-Soundmaster is a portable electronic sound recording/reproducing unit which, by means of a special flexible coupling, can be easily connected to most types of 8 mm., 9.5 mm., and 16 mm. sound or silent projectors. In this way a sound commentary with musical background and effects may be added to an otherwise silent film.

The recorder operates with spools of standard $\frac{1}{4}$ in. iron oxide plastic tape of sufficient length to provide 30 minutes of playing time. Errors in recording can be erased and the recording tape used many times over for fresh recordings. For the purpose of editing, the tape can be cut and rejoined without difficulty.

Scophony-Baird Ltd.,
Wells,
Somerset.



Valve Handling Tools

ILLUSTRATED right is one of two types of valve extracting tools which have been added to the "Spearette" range of miniature valve handling tools. The larger of the two tools, i.e., B8B size, has been modified for extracting the Mazda S.P. 41 and 61 valves. The B8A



Type Extractor is priced at 7s. 6d., and B8G, B8B and S.P.41 at 10s. 6d.

Spear Engineering Co., Ltd.
Titan Works,
Limpsfield Road,
Warlingham, Surrey.

Haynes P.M. Focusing Units

(Illustrated above)

TWO new types have been introduced, the PM15A and the PM20A for use with tetrode and triode C.R. tubes respectively. These are fitted with vertical and horizontal shift controls conveniently placed at the back, as well as a focusing adjustment operating at the rear and beyond the base of the tube. Shift is produced by a slight movement of a "shuffle" plate which engages only a small part of the flux in the region of the gap, and the picture may be critically centred without derangement of focus. Resort to tilting is thus unnecessary, the focusing unit being firmly mounted with its axis aligned and concentric with the neck of the tube, for which support is provided. The focusing control by variable gap works through gears, and the control knob may extend out at the rear of the cabinet, affording the same ease of adjustment as that offered by the variable resistance used with focusing coils.

Haynes Radio Ltd.,
Queensway,
Enfield, Middlesex.



Equipment

tronic apparatus, components and supplied by the manufacturers.



Indoor Television Aerial

(Illustrated above)

THE " Flexible Dipole " is a full-size television aerial for indoor installation ; when used in good or medium field-strength areas it will give similar results to those of a standard aerial. Coaxial feeder cable of 50-55 ohms impedance is used to couple the dipole to the receiver, and a transformer rejector unit gives correct coupling of the aerial to the feeder cable.

As a rule in locations up to about 10 miles from the transmitter the flexible dipole may be installed in a ground floor room with the receiver ; at distances greater than 10 miles the dipole is better installed in an upper storey or loft.

The aerial can be fixed by the side of a window behind curtains, and is therefore unobtrusive. It works equally well with the majority of receivers. There are two models, one for London and one for the Midlands, and they are both supplied with 24 feet of coaxial feeder cable.

E.M.I. Sales and Service Ltd., Hayes, Middx,

Television Receiver Knobs

(Illustrated below right)

THE television receiver knobs illustrated bottom right, have been designed for better identification. The knobs' profile and straight-knurling gives a good grip and ensures fine adjustment and control, which is particularly necessary for focusing.

They all are 1½ in. diameter by ⅝ in. projection, having a standard ¼ in. diameter bore for ¼ in. shafts. All the knobs are obtainable in black or brown, with switch, focus, volume, contrast and brightness engravings.

Crocodile Clips

(Illustrated bottom left)

NEW additions to the range of Bulgin crocodile clips are the CR. 15-18 general purposes types of 25A rating, to supplement the original 5A size varieties. Others are the CR. 21-23 " Fine Wire " types of up to 5A rating (specially made for gripping flex-strands and fine wires) and the CR. 25-28 " Battery Charger " types, specially shaped to grip car battery lugs and rod or bus-bars. These clips will not turn or displace inadvertently, and are particularly safe and useful with accumulators.

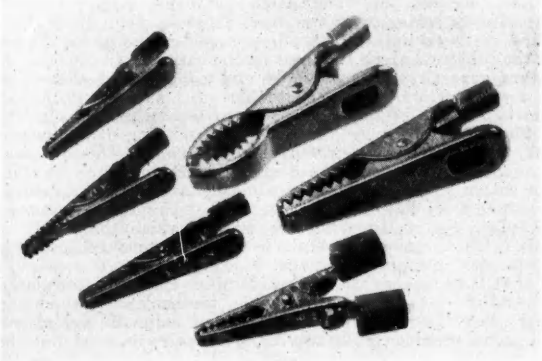

A. F. Bulgin and Co. Ltd., Bye-Pass Road, Barking, Essex.

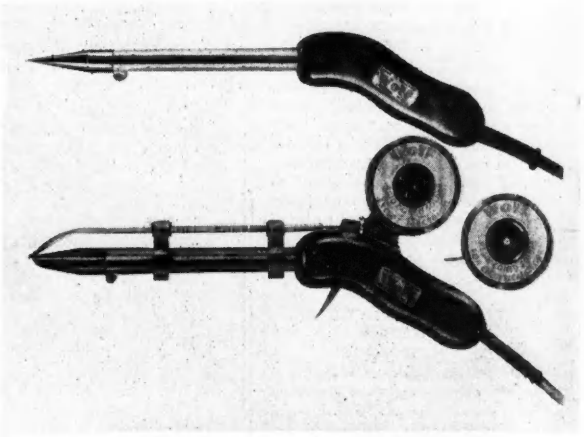

Electric Solderguns

(Illustrated above)

A new range of Electric Solderguns has been produced by Wolf Electric Tools, Ltd., which they claim will overcome hitherto common criticism of this type of equipment. Industrial soldering requirements have long called for soldering tools which will reach operating temperature quickly, will maintain a correct constant heat, prove economical in current consumption and are " easy in the hand " for long production periods.

The illustration pictures two irons from their range of six hand models ; particular attention is directed to the off-straight hand grip which tends to much more comfortable control. By arrangement within the heating element, the heat is localized around the copper bit, and with the elimination of wasted heat areas considerable economy in current consumption has been effected. At the same time tendency towards excessive temperature rise is avoided and this in turn prolongs heating element life and saves oxydization of the copper bits.

Wolf solderguns can be supplied for the following voltages : 24, 50, 100/110, 115/130, 200/220, 225/250, and each gun is fitted with six feet of 3-core cable. Models are available for a wide range of purposes from fine instrument to heavy duty work.

Wolf Electric Tools, Ltd., Pioneer Works, Hanger Lane, Ealing, London, W.5.



THE THEORY AND DESIGN OF INDUCTANCE COILS
By V. G. WELSBY

This book is intended to assist the circuit designer in selecting the coil design more suitable for a given purpose, and to enable him to predict the changes which must be made in a given design in order to obtain any desired performance of the resulting coil. It will also appeal to students who must obtain a clear understanding of the applications and design of inductance coils.

60 illustrations. 18s. Postage 6d.

THE ELECTROLYTIC CAPACITOR
By A. M. GEORGIEV

This is a practical book which will be of value not only to engineers concerned with the actual design and manufacture of electrolytic capacitors, but also to that larger group of engineers, technicians and maintenance men concerned with equipment in which electrolytic capacitors are used, e.g., radio receivers and transmitters ; sound systems and other electronic apparatus ; telephone circuits ; electric welding equipment ; and single phase induction motors.

15s. Postage 6d

THE MODERN BOOK CO.
(Dept E.7.)
19-23, Praed Street, London, W.2.
We are Scientific & Technical Book Specialists

LEWIS'S of Gower Street

Invite inspection of their stock of books on all branches of

RADIO and ELECTRICAL ENGINEERING

Catalogues on request.

FOREIGN BOOKS, Select Stock. Books not in stock, obtained under Board of Trade Licence.

Secondhand Department

140 Gower Street, W.C.1

A constantly changing large stock of scientific and technical literature on view.

Books sought for and reported free of charge

Large or small collections bought

LONDON: H. K. LEWIS & Co. Ltd.
136 GOWER STREET, W.C.1
Telephone : EUSton 4282
Established 1844
Business hours: 9a.m. to 5 p.m. Sats. to 1 p.m.

Elements of Electronics

By G. Windred. 197 pages, 100 figures, 6 plates. Chapman & Hall, Ltd., 1949. Price 15s.

THE subject of "Electronics" covers an extremely wide field, as readers of ELECTRONIC ENGINEERING are undoubtedly aware, ranging from atomic theory, circuit theory and wave propagation theory to practical engineering topics such as sound films, sound broadcasting and television. To cover this wide field within the scope of a single volume may well be considered an impossible task; nevertheless the author of this book, the late Mr. G. Windred, has been reasonably successful in giving the reader a bird's-eye view of the subject. Such a view is not without value since it enables the reader to see clearly how the fundamental researches of Sir J. J. Thomson, Lord Rutherford, Sir J. A. Fleming and many others laid the foundations for developments which affected directly or indirectly the lives of every human being in the civilised world.

The early chapters of the book survey in broad outline the discovery of the electron and the classical researches which enabled the charge and mass of the electron to be evaluated, the principles of thermionic emission and the behaviour of electrons *in vacua* and gases, and the photo-electric and photo-voltaic effects. The characteristics of thermionic valves are then discussed and the uses of valves as oscillators and in amplifiers are explained, including some reference to magnetrons and velocity-modulated valves, e.g., klystrons.

The later chapters cover the applications of electronic techniques; these range from mercury arc rectifiers for supplying thousands of kilowatts of power to electric traction systems, X-rays for medical and industrial purposes, cathode ray tubes, television, the recording and reproduction of sound on film, the electron microscope, cyclotrons and betatrons for producing high-voltage electron and ion beams, and finally radiolocation. Each chapter concludes with a list of book references for further reading, with comments on the treatment the subject is given.

The drawings are generally clear but there are a few errors, for example grid bias is omitted for the second stages of the amplifiers in Figs. 51 and 52, the grid-leak is missing in the quartz crystal controlled oscillator shown in Fig. 58 and the potentiometer P in Fig. 65 should be connected to the positive side of battery B_1. There are also some misconceptions, for example on p. 156 it is said that "the speed of propagation of radio waves is 186,000 miles per second and the entire process of signal production, transmission and reception is virtually instantaneous . . . this is an important factor which makes television possible." The important factor is not, of course, the speed of propagation but that all components of the signal should be transmitted with the same speed.

Perhaps the most important omission is the lack of an adequate account of the control of industrial processes by electronic techniques. It is in this field that electronics has made a most valuable contribution to mass production methods, notably in the United States of America, and it may well be that industry in this country would benefit from the wider use of such techniques.

However, the author has on the whole selected his material well and given it a clear and concise treatment, well suited to the needs of the general reader and the student of electrical technology who requires a survey of the subject. The specialist in any one of the many aspects of electronics covered by the book will probably find his particular subject dealt with all too briefly, but this is inevitable in view of the limited space available.

W. J. BRAY.

BOOK

Electric and Magnetic Fields

By Stephen S. Atwood. Third Edition Chapman & Hall, Ltd., 1949. 475 pp. Price 44s.

THIS book, by the Professor of Electrical Engineering at the University of Michigan, is intended to serve as an introduction to the mathematical theory of electricity and magnetism for first and second-year students of physics and electrical engineering. It is in four parts dealing respectively with the electric field, the magnetic field, the ferromagnetic field, and combined electric and magnetic fields. The mathematical treatment is simple and concise and should be intelligible to anyone with an elementary knowledge of the calculus (there is a glaring mathematical error on p. 193). The physical principles underlying the mathematical results are clearly explained, and in the first chapter a statement of the way in which the theory is built up from experimental results is given.

Considerable emphasis is placed throughout the book on the plotting of electric and magnetic fields, and two chapters are devoted to the

REVIEWS

solution of Laplace's equation by field-plotting methods. There are a large number of carefully drawn field diagrams and many of these are for systems of practical importance, such as transmission lines and cables. An admirable feature is that there are frequent references to atomic and nuclear theories and the light they shed on electric and magnetic phenomena. An appendix entitled "Electrons in Atoms" gives the necessary background of atomic structure and quantum theory. Other appendices deal with the conversion of systems of units (in accordance with modern practice this edition has been rewritten using the rationalized M.K.S. system) and a brief historical survey.

This book will be found useful by the class of students for whom it is written, and it forms an excellent introduction to more advanced works on the subject. One minor criticism is that there is no mention of the very powerful method of solving Laplace's equation by conformal transformations.

J. BROWN.

Industrial Electronic Control

By W. D. Cockrell, pp. 385 + XV, 2nd. Edition. McGraw-Hill Book Company, Inc., London, 1950. Price 34s. net.

FIRST produced in 1944, this second edition of the book contains additional matter on electronic counting and switching, and closed-cycle systems. Primarily, the book is written for electrical engineers with little or no experience of electronic techniques, and accordingly starts with a section (six chapters) on valve fundamentals, with special reference to industrial types such as gas-filled rectifiers, ignitrons, thyratrons, and the like. Then follows five chapters on other circuit components, and not till nearly half-way through the volume does any discussion of complete circuits start; with five chapters on basic units, rectifiers, amplifiers, oscillators, timing and switching circuits, etc.

The added thirty page section on closed-cycle control systems is treated in a mildly mathematical manner and is adequate for its purpose, giving due deference to Nyquist and Bode, although perhaps the information is not sufficiently linked with practicalities. The book ends with what is probably the most useful section, on practical industrial systems, illustrated in fair detail from commercial examples. Especially covered are photo-electric systems; D.C. motor control; A.C. relays, timers and power control systems; and welder controls. The more "refined" industrial controls of temperature, pressure, moisture and *p*H, are not mentioned, presumably because they are so often better done by non-electronic methods, nor are many other points which while perhaps, strictly speaking, not being control problems, might have been included.

A lengthy appendix contains the inevitable colour codes and nomograms, optical data and some other miscellanea. The book is, of course, American, and has the advantages and disadvantages so implied, but will be of general use to the British reader. It will find its greatest service as an elementary introduction for the uninitiated or as a general reference volume for the practical man.

E. D. HART.

Principles of Electricity and Electromagnetism

By G. P. Harnwell. pp. 670, 2nd. Edition. McGraw Hill, Ltd. 1949. Price 36s.

THE important thing to realize about this book is that if you adopt it you are taking the plunge into the 20th century and leaving behind the 18th-19th century approach to "electricity and magnetism." (Most of us realize that this must be done some time, though we may shirk the effort on the pretext of fearing the effect on the student who is forced to change his system of units somewhere between matriculation and a university degree.) For the most obvious feature of this book is the use of rationalized M.K.S. units, which simplify the equation of electromagnetic fields as in transformers and radio waves—at the expense of complicating slightly the formulae for forces between charged pith balls and between permanent magnets. The other "modernisms" are the derivation of magnetic phenomena entirely from the effects of electric currents (independent of magnetic poles), and the choice of B rather than H as the basic magnetic quantity. This last feature has been over-done. To describe $H = B/\mu$ as a concept convenient for describing the properties of magnetic materials surely underrates the value in electromagnetism of the idea of "magneto-motive force"; and when, having found that B has the dimensions of volt-sec. per square metre, we are told that "The volt-second is called the *weber*, hence B is measured in units of weber per square meter," we stop to ask whether there ever was a man named Weber who was interested in ferromagnetism.

CHAPMAN & HALL

Ready this month

INTRODUCTION TO ELECTRONICS

by

J. Yarwood, M.SC., A.INST.P.

344 pages. 121 figures. 28s. net.

Recently Published

AN INTRODUCTION TO LUMINESCENCE OF SOLIDS

by

H. W. Leverenz

(Research Chemico-physicist, R.C.A. Laboratories, Princeton, N.J.)

586 pages. 143 figures. 96s. net

An up-to-date text book by an acknowledged authority on the subject of luminescence.

37, ESSEX STREET, LONDON, W.C. 2

TRANSIENT PERFORMANCE of ELECTRIC POWER SYSTEMS

By Professor R. Rudenberg, Harvard University, 826 pages, 9 × 6, illustrated. 102/-

This is an enlarged edition in English of the classic German text, main sections being — Rotating Masses, Influence of the Earth, Variable Resistance, Interruption of Electric Arcs, Magnetic Saturation in Circuits at Rest, Saturated Rotating machinery.

Readily available from all technical booksellers.

McGRAW-HILL, PUBLISHING CO., LTD.
ALDWYCH HOUSE, LONDON, W.C.2



by the

Fielden

Servograph

SERVOGRAPH OPERATES DIRECTLY FROM VERY LIGHT CURRENT SOURCES, consuming but a few micro watts for full scale deflection.
Its working principle is unique and sets up a new high standard of accuracy and robustness for graphical recording meters SEVOGRAPH'S accuracy is to *BSS.89 for Grade 1 Indicating* Instruments— because its servo-driven pen arm removes all load from the instrument movement, admits a robust and trouble-free pen, and maintains this accuracy with full or empty ink reservoir. Needing no levelling, it operates correctly in any position and can be connected directly to tachometers, thermo-couples, resistance thermometers, CO_2 indicators, pH meters and so on, repeating their accuracy on the chart. Equally useful, too, as an ammeter, voltmeter, etc., it may embody a moving iron, moving coil, dynamometer or electrostatic movement.

Please write for technical leaflets 100/4

Movements available from 50 micro-amps or 15 milli-volts upwards.



FIELDEN (ELECTRONICS) LIMITED

PASTON ROAD, WYTHENSHAWE, MANCHESTER.

Fielden Electronics (Australia) Pty Ltd., 409 Collins Street, Melbourne, Australia.

Specialists in Industrial Electronic Equipment

Hopwood

BOOK REVIEWS (Continued)

Considering the size of the book, one is at first surprised at the extent to which reference is made to other treatises for fuller details of almost every topic, though one is pleased to see British books represented in these references by such authors as Hague, Jeans, Mott and Moullin. The reason for limited treatment is that the scope of this book is really much wider than its title, and covers three fields:—

(1) The laws of electromagnetism, i.e., fields associated with charges and currents, leading to Maxwell's equations and radiation.

(2) The physics of materials used in the applications of electromagnetism, covering such features as thermo-electric and Hall effects, dielectric polarization, Fermi statistics in relation to semi-conductors and a particularly thorough section on the physics of magnetic bodies.

(3) An account of the applications of electromagnetic principles to electrical machines, radio, etc.

The treatment of the applications is necessarily introductory rather than comprehensive, but the standard reached is indicated by the inclusion of reference to the following: Johnson noise and shot noise (the latter without mentioning the effect of space-charge); the gyromagnetic frequency in the propagation of radio waves through the ionosphere; waves in a rectangular guide; the synchrotron particle accelerator; the Scott connected transformer for conversion between 2-phase and 3-phase power; the use of a synchronous motor as a capacitor; Nyquist's criterion for stability of a feed-back amplifier.

There are five appendices, but the weakest point is the index, which lacks cross-references: thus Nyquist's stability criterion is not to be found under "Nyquist" or "stability," but only by implication under "amplifier, feedback."

D. A. Bell.

Electrical Transmission of Power and Signals

By E. W. Kimbark, 461 pp. 229 diagrams. 23 tables. John Wiley & Sons, Inc, New York. Chapman & Hall, Ltd., London, 1949. Price 48s.

THIS book is intended for junior and senior students in electrical engineering and the author claims that it is the first book ever written that presents the basic theory of transmission lines together with applications to the three fields of power, telephony, and ultra high frequencies.

The first five chapters are devoted to describing and deriving the parameters of simple two conductor lines, multi-conductor lines, stranded and miscellaneous conductors and ground return lines.

In Chapter 6 the reader is introduced to the formulation of the differential equations representing the transmission of current and voltage along a transmission line with uniformly distributed parameters, and to the solution of the equations for the steady state case.

The representation of a smooth line as the extreme case of an infinite number of T or π networks in cascade is then dealt with, and the point is emphasized that by this means the use of differential equations may be avoided.

The next chapter is concerned with transient phenomena on transmission lines, and although presented in a clear pictorial manner the emphasis is far too strong on lightning surges and not enough on the equally important aspect of waveform distortion of signals in communication systems and the significance of this in television transmission, for example.

Chapter 12, dealing with telephone and telegraph transmission, is perhaps the least satisfying in the book and parts of it might well be omitted altogether. The statement on p. 263 that different groups of carrier frequencies are generally used for transmission in each of the two opposite directions, applies only to systems on open wire lines, which do not form the majority of carrier circuits in this country or in America.

Wave filters are discussed adequately in 26 pages, but it is surprising that other important networks such as attenuation and phase equalizers are dismissed in a few lines.

The book concludes with a chapter on Wave Guides presented in a simplified form, while the two appendices contain a lot of useful information on conductors and transmission lines, presented in tables and curves.

Each chapter contains a good bibliography, and the author has achieved a welcome consistency in the style and standard of presentation. This book may be recommended to all students of electrical transmission courses.

L. I. Farren.

FINE RESISTANCE WIRES

NICKEL-CHROMIUM — FOR HIGH VALUE FIXED AND VARIABLE RESISTORS AND POTENTIOMETERS

COPPER-NICKEL — FOR ELECTRICAL MEASURING INSTRUMENTS OF ALL TYPES

MINALPHA — FOR STANDARD RESISTANCE EQUIPMENT

MANCOLOY 10 — FOR LOW RESISTANCE MEASURING AND RADIO EQUIPMENT

Comprehensive details of the properties of these alloys and of recommended uses of our precision-drawn resistance wires are given in Booklet 1440, freely available on request.

JOHNSON, MATTHEY & CO., LIMITED,
HATTON GARDEN · LONDON, E.C.1

Johnson Matthey

G.D. 142

AUSTINLITE controls the current

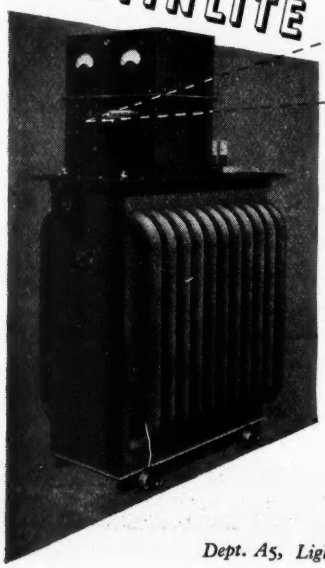

Austinlite Rotary Switches are used to control the Auto-Transformer regulating the A.C. supply to these Electro Plating Rectifiers, manufactured by Partridge, Wilson & Co. Ltd.
Full details of the Austinlite 50 amp. Rotary Switch and of the **new** 30 amp. switch will be gladly supplied on request.

A Chance PRODUCT

AUSTINLITE LIMITED, (*A subsidiary of Chance Brothers Limited*),
Dept. A5, Lighthouse Works, Smethwick 40, *Birmingham. Telephone: West Bromwich* 1051.

Suppress E.H.T. radiation

SIMPLY EFFECTIVELY ECONOMICALLY

with **'dag' COLLOIDAL GRAPHITE**

A quick-drying conducting paint of 'dag' colloidal graphite applied by brush to the inside of a television cabinet effectively suppresses radiation from the E.H.T. valve, the line transformer and their associated circuits. A radio receiver can be satisfactorily operated on the long waveband *within a few feet* of a television receiver thus treated.

SEND FOR DETAILS

To: ACHESON COLLOIDS LIMITED
18 PALL MALL, LONDON, S.W.1.

Please supply full technical information concerning the treatment of television cabinets with 'dag' dispersion 479.

NAME.....

ADDRESS.....

.....

.....

dag TRADE MARK DISPERSIONS

D/18

TELCON'S LATEST MAGNETIC DEVELOPMENT

H.C.R. ALLOY

is now available in commercial quantities

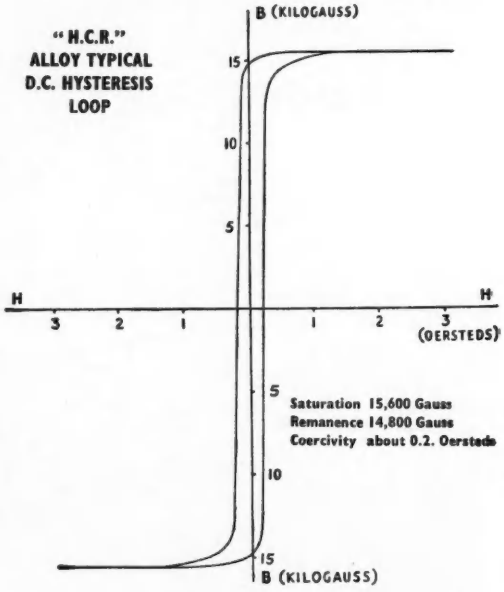

The magnetic properties of this alloy make it suitable for mechanical rectifiers, magnetic amplifiers and special forms of reactors.

Founded TELCON 1864

Full technical details on request from :

THE TELEGRAPH CONSTRUCTION & MAINTENANCE CO. LTD
Founded 1864
Head Office: 22 OLD BROAD ST. LONDON, E.C.2. Tel: LONdon Wall 7104
Enquiries to TELCON WORKS, GREENWICH, S.E.10. Tel: Greenwich 3291

The Metrovick Stabilised D.C. Power Unit

IN laboratories and meter testing stations there is often a demand for a highly stable d.c. voltage supply. The Power Unit, Type **222**, has been produced to satisfy this demand.

SPECIFICATION

Supply: 200/250V, A.C., 50 c/s., single-phase.

Output: Between 660 and 680 volts D.C. (fixed) at up to 250 mA.

Stability: Maximum drift over 10 min-4 parts in 100,000.
Maximum drift over 1 hr-1·5. parts in 10,000.
These figures apply for mains input changes not exceeding ± 5% after warming up period of two hours.

Output Impedance: Better than 0·1 ohm.

Output Ripple: Approximately 2mV r.m.s.

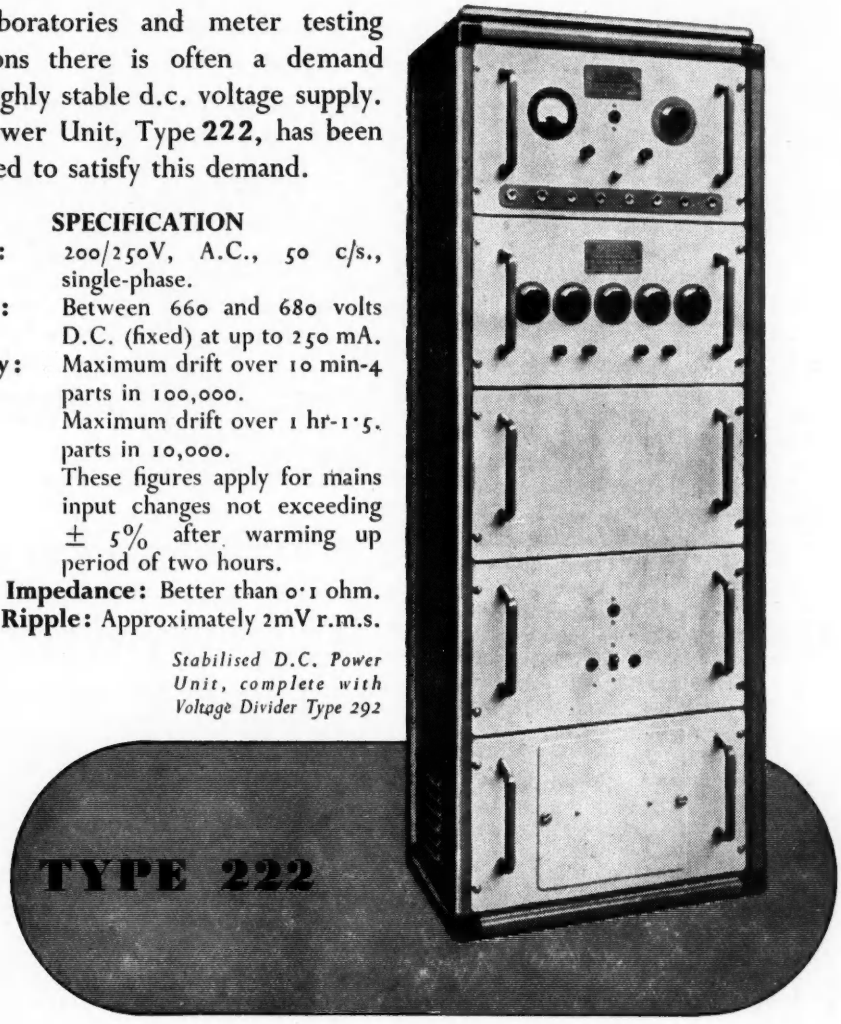

Stabilised D.C. Power Unit, complete with Voltage Divider Type 292

METROPOLITAN-VICKERS ELECTRICAL CO. LTD.

TRAFFORD PARK, MANCHESTER 17

R/E 904

A CAPACITOR...



Actual photograph

for the tightest of TIGHT CORNERS

TRULY MINIATURE There are more than two hundred Type W99 Capacitors piled on this standard match box! Another new development by Hunts to meet the increasing needs of designers and manufacturers for a quality capacitor for use in light weight, compact equipment employing miniature valves and for T.V. equipment.

TYPE W99 MIDGET MOLDSEAL METALLISED PAPER

CAPACITANCE TOLERANCE: ± 20% *(closer tolerances are available)*

TEMPERATURE RANGE: −40°C. to +71°C.

INSULATION RESISTANCE Not less than 20,000 megohms.

SELF HEALING

WKG. VOLTAGE	CAP. μF.			SIZE
150 D.C.	0.004	to	0.01	A
	0.02	to	0.04	B
350 D.C.	0.001	to	0.003	A
	0.004	to	0.01	B
600 D.C.	2.5pF	to	0.0005	A
	0.001	to	0.002	B
300 A.C.	0.00005	to	0.001	A
	0.002			B



Registered Trade Mark

HUNTS CAPACITORS

THE TRADE MARK OF RELIABILITY

● *Full details of all Hunt's types, samples and advice on any capacitor application gladly supplied.*

DRY ELECTROLYTICS. METALLISED PAPER. FOIL & PAPER STACKED & SILVERED MICAS, ETC.

A. H. HUNT LTD., WANDSWORTH, LONDON, S.W.18
Tel.: BATtersea 3131 **Established 1901**

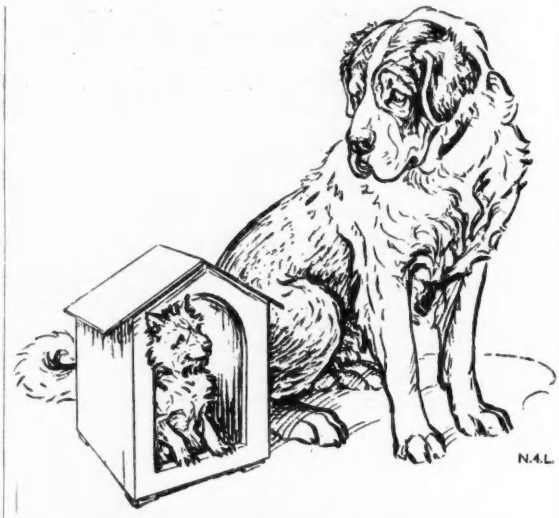

Takes up less room

In a typical case, a conventional battery occupying 18 cu. ft. of space was replaced by a Nife battery of identical capacity but only needing 14 cu. ft. Moreover, as the gas produced by a Nife battery is innocuous, no separate battery room was needed. This compactness of Nife Batteries is only one of the reasons for choosing Nife for switchgear operation. In addition, Nife is made principally of steel, and so is chemically and physically almost indestructible. Nife is also unaffected by the heaviest rates of charge and discharge, and so is electrically most reliable. Many records show that it costs practically nothing to maintain a Nife battery. That's why so many are in use in the main grid power stations. (*N.B. Nife batteries are not yet available for private cars or domestic radio.*)

CUT YOUR COSTS WITH



NIFE

STEEL BATTERIES

NIFE BATTERIES · REDDITCH · WORCESTERSHIRE

FOR USERS OF NAGARD TYPE 103 OSCILLOSCOPE

UNIT CONSTRUCTION

The unit construction enables any one of these amplifiers to be used in the NAGARD Type 103, then providing time and voltage calibration.

They can also be had as self-contained cased or rack-mounted instruments with inputs and outputs to meet specific requirements.

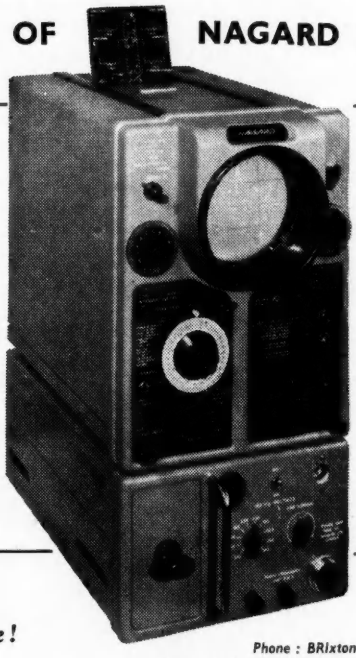

THREE NEW

D.C. AMPLIFIERS

D.C. to 20 k/cs.
GAIN OVER 100,000
NOISE LEVEL 5μV.

D.C. to 2 Mc/s.
GAIN OVER 15,000
NOISE LEVEL 60μV.

D.C. to 10Mc/s.
GAIN OVER 250
RISE TIME 0·05μsecs.

ALL STABLE AND DRIFT FREE

SEE what you measure!

NAGARD LTD

Phone : BRIxton 3550
Grams : Intertel, Claproad, London.

245, BRIXTON ROAD, LONDON, S.W.9

The AUTHORITY ON *Power Equipment for* ELECTRONICS



LOW VOLTAGE ROTARY TRANSFORMER. 12 volts to 600 volts 200 m.a.



STANDARD RADIO AND TELEVISION ROTARY CONVERTER with filter and sound-proof cabinet. 230 volts A.C. Single Phase output.



MINIATURE ROTARY TRANSFORMER. 24/36 volts D.C. input. 60 watts output.



HIGH FREQUENCY MOTOR-ALTERNATOR. 200 watts 400 cycles output from 220 volts D.C.

For details and technical specification of Power Equipment for all Electronic purposes including the equipment illustrated, write for fully illustrated and descriptive lists 3 R.C. and 16 H.F. In prototype stages let your designers meet ours.

ELECTRO DYNAMIC CONSTRUCTION COMPANY LIMITED

Head Office and Works: **ST. MARY CRAY · KENT**
BRANCH WORKS: BRIDGWATER · SOMERSET

'Phone: Orpington 2560-3

E.D.C. 19

your recording problems solved by a



oscillograph

ME? Trolley Mounted Oscillograph with F.M. Amplifiers for Capacity Pick-ups

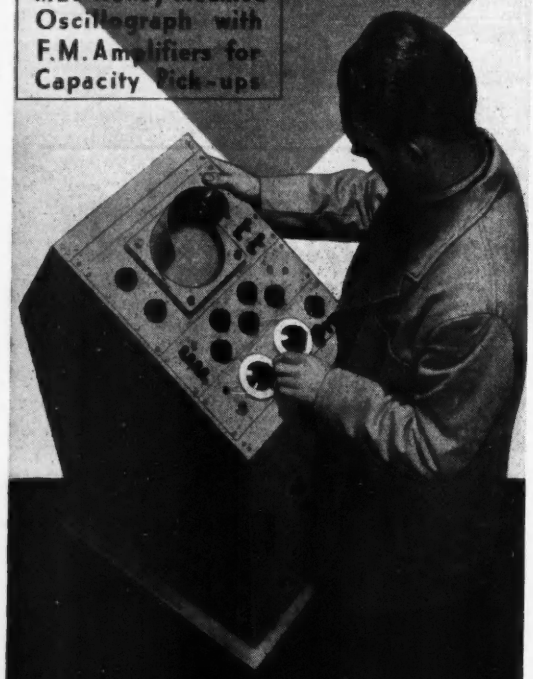

SOUTHERN INSTRUMENTS LIMITED

FERNHILL HAWLEY CAMBERLEY SURREY

TELEPHONE CAMBERLEY 1741

SMAKERS & IMPRO
odern factory. Opportuniti
5-day week, good wages,
l holiday. Canteen an
ie Savings Group ppl
ons Ltd., Queen S

a good saver is a good worker

Starting a Staff Savings Group is a simple process. All the information, equipment and publicity material you require will be gladly sent free of charge on application to your Local Savings Committee or to the National Savings Committee, 39 Hyde Park Gate, London, S.W.7.

Issued by the National Savings Committee

The Advance Signal GENERATOR.... TYPE D1

RANGE : 10 to 310 Mc/s

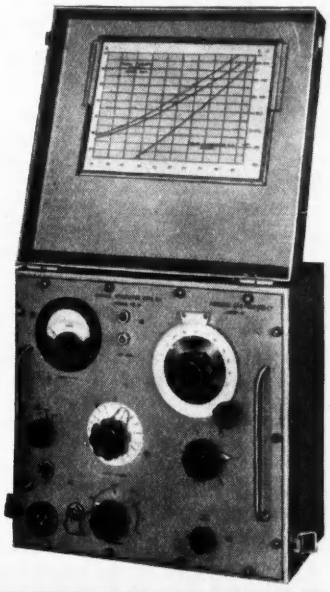

THIS "ADVANCE" Signal Generator is compact in size, light in weight, and can be operated either from A.C. Power Supply or low-voltage high-frequency supplies. A Colpitts Oscillatory circuit is employed, which may be plate modulated by a 1,000-cycle sine wave oscillator, or grid modulated by a 50/50 square wave. Both types of modulation are internal, and selected by a switch. The oscillator section is triple shielded and external stray magnetic and electrostatic fields are negligible. Six coils are used to cover the range, and they are mounted in a coil turret of special design. The output from the R.F. oscillator is fed to an inductive slide wire, where it is monitored by an EA50 diode. The slide wire feeds a 75-ohm 5-step decade attenuator of new design. The output voltage is taken from the end of a 75-ohm matched transmission line.

Light Weight	34 lb.
Negligible Stray Field.	
Frequency Calibration	±1%
Modulation 30% sine wave 1,000~ and pulsed 50/50 square wave at 1,000~	
Max Attenuation error at 300 Mc/s. ...	±2db
Precision Slow-motion Dial.	
Wide Range	10-310 Mc/s.
Compact	12½" × 13½" × 7½"
Dual-Power Supply	110-250 V., 40-100~ / 80 V., 500-2,000~

PRICE £80

Full details are given in Leaflet No. S6/L a copy of which will gladly be sent on request.

ADVANCE COMPONENTS LTD
BACK RD, SHERNHALL ST, WALTHAMSTOW, LONDON, E.17. 'Phone : LARkswood 4366/7/8

BARE & INSULATED RESISTANCE WIRES

Eureka (Regd.) and Nickel-Chrome

'Eureka' (Regd.) and Nickel-Chrome Resistance Wires can be supplied BARE or with STANDARD COVERINGS of cotton, silk, rayon, enamel and glass.

These wires have been used for many years for winding resistances for instruments, control apparatus, etc.

'Eureka' with its low temperature coefficient is always in demand for precision work, while Nickel-Chromes are used where a high resistance is required in a limited space.

Full details gladly supplied upon request — please address your enquiries as follows :

INSULATED WIRES:
The London Electric Wire Company and Smiths Limited.

BARE WIRES:
Vactite Wire Company Limited.

THE LONDON ELECTRIC WIRE COMPANY AND SMITHS, LIMITED
LEYTON, LONDON, E.10.

VACTITE WIRE COMPANY LTD.
75 ST. SIMON STREET,
SALFORD 3, LANCS.

SPLENDID ISOLATION

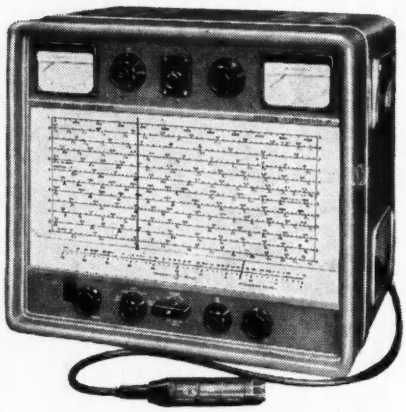

SIGNAL GENERATOR TF867

Because its superiority is unchallenged, Signal Generator type TF 867 stands alone, in splendid isolation. Beautifully designed and finished, its behaviour is impeccable over the range 15 kc/s to 30 Mc/s. Especially noteworthy are an expanded wide-view scale and a concentric terminating unit which, while showing exact circuit conditions on an animated diagram, is also a dummy aerial and impedance source of 75Ω or 13Ω. Other facilities of the Signal Generator include crystal standardisation, freedom from unwanted frequency modulation, deep amplitude or carrier shift modulation and stabilised output control. Output is variable from 4V to 0.4μV and calibration indicates true artificial signal e.m.f. irrespective of load. For further information please apply:

MARCONI INSTRUMENTS LIMITED

ST. ALBANS, HERTFORDSHIRE · Telephone: St. Albans 6161/5

Northern Office: 30 Albion Street, Hull · **Western Office:** 76 Portview Road, Avonmouth · **Southern Office & Showrooms:** 109 Eaton Square, London, S.W.1 · **Midland Office:** 19 The Parade, Leamington Spa.

Please ask for folder
"SUMMARY OF COMMUNICATIONS TEST GEAR"

The AIRMEC *Electronic method of*

FREQUENCY MEASUREMENT

An instrument suitable for frequency measurements up to 20,000 c/s or for high speed revolution counting up to 1,200,000 r.p.m. No load need be imposed on the equipment being tested and one advantage is that the meter will work with a great variety of pick-ups.

Accuracy is ±1% of full scale deflection and provision is made for quickly checking the calibration.

Pamphlet 20 gives further details.

Ranges	0-200, 0-2000, 0-20,000 c.p.s. or up to 1,200,000 v.p.m.
Accuracy	±1% of full scale deflection and unaffected by input wave form or supply within wide limits.
Calibration Check	A simple self checking, calibration device if provided.
Input Signal	Input signal voltage may be any value from 0.1 volts to 20 volts peak.
Supplies	A.C. mains operated.

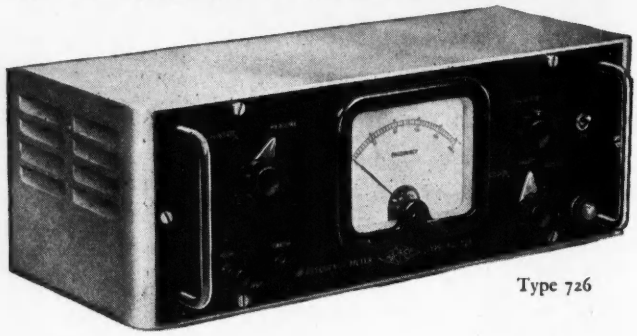

Type 726

AIRMEC LABORATORIES LTD

HIGH WYCOMBE · BUCKINGHAMSHIRE · ENGLAND

TEL: HIGH WYCOMBE 2060 *CABLES: AIRMEC HIGH WYCOMBE*

DESIGNERS AND MANUFACTURERS OF SCIENTIFIC AND INDUSTRIAL ELECTRONIC EQUIPMENT

A.L.(W)2

THE FOX *Helical*
POTENTIOMETER
type PXF 5/H 10
is now available for general release to the Electronic Industry.

BRIEF SPECIFICATION

Resistance range, 20 ohms to 50 K. ohms.
Helical turns, 10.
Rotation, 3,600 deg.
Number of wire turns, 2,000 to 12,000.
Wattage, 5.

Toroidal
POTENTIOMETERS
10–1000 WATTS



Ceramic Insulation only—and approved for tropical conditions.

Complete Ceramic Rings for strength.

Approved by all Government Departments.

Reasonable Delivery.

Specialists in **all types of Toroidal Windings.**

P·X·F

Also precision Toroidal-wound Potentiometers, including 360° of winding with up to eight tapping points. All are available with sealed spindles and glass terminal seals.

Write for full details to :—

P. X. FOX LIMITED

TOROIDAL POTENTIOMETER SPECIALISTS

HORSFORTH, YORKSHIRE, ENGLAND.

Telephone : Horsforth 2831/2. - *Telegrams :* "Toroidal, Leeds."

n.d.h.

COMPACT VACUUM PUMPING SYSTEM

Suitable for Many Applications in the Electronic Industries

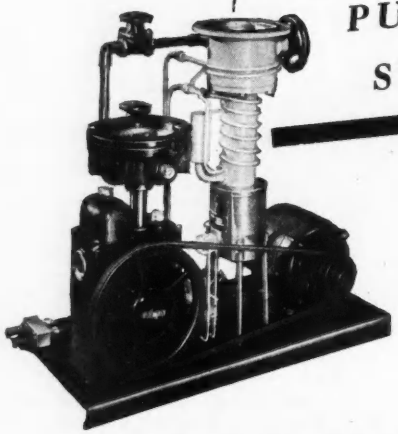

■ Any combination of the 'Speedivac' Rotary and diffusion pumps can be mounted with accessories to suit general or specific vacuum applications. Sizes are available for lecture, research or production work.

■ Compact, self-contained vacuum unit incorporates water connections, electric switches, traps, gauges and vacuum valves.

■ A wide range of experimental and production vacuum units are available for specific vacuum techniques in the electronic industries.

. . . For Better Vacuum Service . . .

W. EDWARDS & COMPANY (LONDON) LTD.
LOWER SYDENHAM, LONDON, S.E.26

Telephone : SYDenham 7026 (8 lines)
Telegrams : EDCOHIVAC, Souphone, London

BALDWIN

Mounting interchangeable with the 3½-inch round flush pattern

FIRST - GRADE TO B.S. 89

Dimensions to K. 113

May be illuminated dial

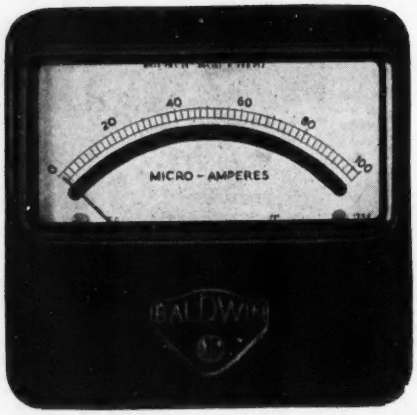

MOVING - COIL for d.c.

RECTIFIER for a.f.

THERMAL for h.f.

Leaflets 101 & 101A.

4-INCH FLUSH MOUNTING OF PARTICULAR APPLICATION TO ELECTRONIC TEST GEAR

Also 2½-inch and 3½-inch round patterns and 6-inch portables

BALDWIN INSTRUMENT CO. LTD., DARTFORD, KENT

Northern Agents : F. C. ROBINSON & PARTNERS LTD., 308 Deansgate, MANCHESTER, 3.

The basis of world standards

Technical excellence supported by constant research and an unrivalled knowledge and experience of Radio Frequency Cable applications, ensures the continuance of the lead established by TELCON in the Radio Frequency Cable field.

Even before the introduction of Telcothene as a cable dielectric, an application pioneered by TELCON, a range of Radio Frequency cables with unique capacity and attenuation characteristics was produced, using Telconax.*

Today, developments are still going on and the solution of any problems involving the application of Radio Frequency cables will be found in the wide range manufactured by TELCON.

* *Telcothene (Regd.)—Polythene processed by Telcon to provide specific characteristics.*

TELCON R.F. CABLES

THE TELEGRAPH CONSTRUCTION & MAINTENANCE CO. LTD

Head Office: 22, OLD BROAD STREET, LONDON, E.C.2. *Telephone: LONdon Wall* 7104

Enquiries to TELCON WORKS, GREENWICH, S.E.10. *Telephone: GREenwich* 3291

TELCON Founded 1864

FROM B B C STUDIOS TO
HOME REPRODUCERS
it's
The same skill and quality that is demanded for B.B.C. FADERS goes into the construction of all Painton products.
Wherever trouble-free, noiseless variation of level is required, either by fading or attenuation to predetermined settings, you can, with confidence, rely upon
control by PAINTON
PHOTOGRAPHS BY KIND PERMISSION OF THE B.B.C.
PAINTON & CO LTD · KINGSTHORPE · NORTHAMPTON

TUSKITE

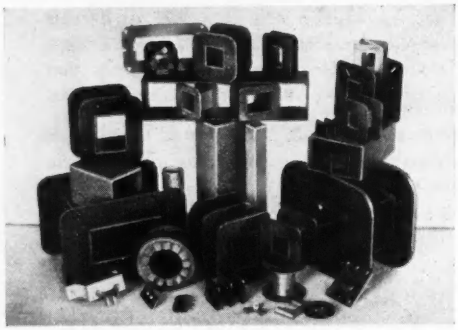

The Name to remember for . . .

BOBBINS, FORMERS, TUBES & SHROUDS

Your enquiries will receive our immediate attention

ARMAND TAYLOR & CO. LTD.

TUSKITE WORKS, MARSH ROAD, PITSEA, ESSEX

Telephone : VANGE 2167.

An announcement

CONCERNING . . .

R.F. E.H.T.

Due to a recent change in sales policy our E.H.T. equipment is now directly available to all interested in high voltage.

Full range obtainable

2·5 — 100 KV.

Breakdown Testers
Stabilised Supplies
Television E.H.T. Packs
Nucleonic Equipment

BRANDENBERG DESIGNS

LIMITED

196 DAWES ROAD, LONDON, S.W.6

FULham 1534

You're SURE to get it at

STERN'S

ESTABLISHED 25 YEARS

Coils. Denco T.R.F. Matched Pair Medium and Long Waves, **6/6** pair. Weymouth T.R.F. Matched Pair M. and L. Waves, **9/6** pair. Superhet Matched Pair S.M. and L. Waves, **8/9** or **11/6** pair. All types Wearite "P" Coils, **3/-** each, in stock. Weymouth Midget 1⅛ in. × ⅞ in. dia., Iron Core, Aerial H.F. or Osc., **3/6** each.

Osmor Midget Coil Pack. Size 3½ in. × 2⅛ in. × 1⅛ in., covering S.M. and L.Waves. Coils wound on Polystyrene Formers with adjustable iron cores ensures efficient performance. Factory wired and aligned. Price, including full circuits, for Superhet 465 Kc/s. Unit **33/-**. For T.R.F. circuit covering M. and L.Waves, **30/-**. The Battery Portable Superhet Pack, including ready wound Frame Aerial, covering S. M. and L. waves, **37/6.**

Aluminium Chassis. Substantially made of gauge 16 S.W.G. with four sides : 7 in. × 4 in. × 2 in., **3/3** ; 9 in. × 5 in. × 2⅛ in., **4/-** ; 10 in. × 6 in. × 2⅛ in., **4/11** ; 10 in. × 8 in. × 2⅛ in., **5/6** ; 12 in. × 9 in. × 2⅛ in., **6/8** ; 14 in. × 9 in. × 2⅛ in., **6/11** ; 16 in. × 8 in. × 2⅛ in., **7/3** ; 16 in. × 9 in. × 3⅛ in., **8/6.**

Metal Rectifiers. Westinghouse, 250μA, **11/6.** 1 mA, **10/6.** 5 mA, **4/9**

Selenium Rectifiers. H.T.L. Wave, 250 V 50 mA, **5/6** ; 200 V 100 mA, **5/9** ; 250 V 100 mA, **7/6.** Bridge Rectifier, 6 V 1½ amp., **7/6** ; 12 V 1½ amp., **11/6** ; 12 V 3 amp., **19/6** ; 12 V 5 amp., **25/-** ; 24 V 3 amp., **23/6.**

Charger Transformers. Each has an input of 230 volts. Outputs : (a) 24 volt tapped 15 V, 9 V and 4 V, at 3 amps., **21/6** ; (b) 30 volts tapped 15 V and 9 V at 3 amps., **22/-** ; (c) 15 volts tapped 9 V, at 3 amps., **14/3** ; (d) 12 volts at 1½ amps., **11/3** ; (e) 15 volts tapped 9 V at 6 amps., **19/9.**

Filament Transformer. Inputs 230 volts, outputs 6.3V 1½ amp., **7/6** ; 4V 1½ amp., **7/6** ; Input 200/250 V, output 4 V (C.T.) 1½ amp., 4 V 2 amp., 6.3 V 2 amp., **19/6.**

A Midget T.R.F. Battery Portable "Personal" Kit. A complete Kit of Parts to build a Midget 4-valve All-dry Battery Personal Set. Consists of Regenerative T.R.F. Circuit employing Flat Tuned Frame Aerial, with Denco Iron Dust Cored Coil, thereby ensuring maximum gain for Single Tuned Stage covering Medium Waveband.

Valve Line-up : IT4 (R.F. Ampl.), IT4 (Detector), IS5 (1st A.F.) and 3S4 (output). Includes latest Rola 3-in. Moving Coil Speaker, and a Chassis already drilled and shaped. A consumption of only 7 mA ensures long battery life. The Kit is designed for a cabinet, minimum size 6½ in. × 4½ in. × 3 in. Detailed Building Instructions, with Practical Layout and Circuit included with Kit make assembly easy.

Price for Complete Kit, £3/18/9 (plus **16/7** P.T.). Suitable unpolished Cabinet, 6½ in. × 4½ in. × 3 in., **12/9.** Ever Ready B114 Battery, **9/7.** Building Instructions, Circuit, etc., supplied separately, **1/-.**

"Wireless World" Midget A.C. Mains 2-Valve Receiver. We can supply all the components, including valves and M/Coil Speaker to build this set as specified in the March issue, at a total cost of **£3.** Reprint of detailed assembly instructions and circuit supplied separately for **9d.**

Mains or Battery Personal Kit. A Kit of Parts to build our new Midget 4-Valve Superhet "Personal" Set, covering Medium and Long Wavebands and designed for Mains or Battery operation, is now available. This 2-waveband superhet receiver is designed to operate on A.C. mains 200-240 volts, or by an "All-Dry" battery, either means being selected by the turn of a rotary switch. It is so designed that the mains section, size 4½ in. × 3½ in. × 1½ in., is supplied as a separate Kit (which may be added at any time). The Kit can therefore be supplied either as an "All-Dry" Battery Personal Set, or by incorporating the mains section as a Midget receiver for combined Battery/Mains operation).

The circuit incorporates delayed A.V.C. and pre-selective audio feedback. A Rola 4-in. P.M. speaker with a generous sized output transformer ensures excellent quality reproduction. Two ready wound frame areials and a drilled midget chassis are included. The overall size of chassis when completely wired is 8½ in. × 4 in. × 2½ in. Valve line-up 1R5 (freq. ch.), IT4 (I.F. amp.), IS5 (diode det. and audio amp.), and 3S4 (output tet.). The set is easily built from the very detailed building instructions supplied, which includes a practical Component Layout, with point-to-point wiring diagram, and a circuit diagram.

Price of **Complete Kit** (less Mains Unit), including P.T., **£6/13/9.** Price of **Mains Unit Kit, £1/17/6.** Price of **Ever Ready B114 Battery, 9/7.**

An attractive Walnut-finished Portable Cabinet to house the combined receiver is also available. This cabinet is also quite suitable for the "All-Dry" battery version. **Price 19/9.**

The complete assembly instructions mentioned above can also be supplied separately for **1/9.**

A complete **Kit of Parts** to build a miniature **"All-Dry" Battery Eliminator,** giving 69 volts H.T. (approx.) and 1.4 volts L.T. This Eliminator is suitable for use with any Personal battery set requiring H.T. and L.T. as above (or even for sets requiring approx. 90 volts).

It is housed in a light aluminium case, size 4½ in. × 3⅜ in. × 1½ in., and can therefore be accommodated in most makes of Personal receivers.

Price of **Complete Kit** including detailed assembly instructions and layout **£1/17/6**

The Midget A.C. Mains 3-Valve Receiver circuit, as published in the "Wireless World." We can supply all the components to build this set, which covers Medium and Long Waves, for **£4/5/-** (including complete assembly instructions). A reprint of complete assembly instructions can be supplied separately for **9d.** (including postage).

We can now supply an attactive walnut-finished Cabinet for the "Wireless World" 3-Valve Set, with a complete Slow-Motion Dial and Drive Assembly (Station-named Dial to latest wavelengths). Inclusive price **£1/14/6.** Cabinet available separately for **21/-.**

★Send 3d. Stamp for our Comprehensive Kit and Component Stock List. When ordering, please cover packing and postage.

STERN RADIO LTD., 109 and 115 FLEET STREET, E.C.4.

Telephone : CENtral 5814 and 2280

We shall be pleased to select for any prospective purchaser a galvanometer suited to any particular industrial application or measurement problem.

A NEW SULLIVAN SUSPENDED COIL PORTABLE GALVANOMETER UNIT

. . . which may be supplied alone or boxed complete with scale, illumination (with mains transformer) and novel scale magnification.

The unit is exceptionally well constructed and reliable in performance and is **completely enclosed within a draught and dust-tight bakelite case** measuring only 8 cm. by 4 cm. by 12 cm. high. When boxed as a complete measuring system it measures only 26 cm. by 17 cm. by 15 cm.

A complete series of these portable galvanometer units is available, mounted or unmounted, with many scale arrangements and **for any Sensitivity, Time period or Resistance.**

H. W. SULLIVAN
LIMITED
LONDON, S.E.15.

Telephone NEW CROSS 3225 (P.B.X.)

NOT JUST A FEW BARS BUT A COMPLETE INTERLACED PATTERN!

THERE are cheaper Pattern Generators than the Murphy T.P.G. 11 but their performance is limited. You pay more for the Murphy because it gives you the first essential—THE COMPLETE SYNCHRONISING WAVEFORM AS USED IN THE B.B.C. TRANSMISSION — *necessary* for the correct alignment of Television receivers.

Far better to pay the extra cost and have a Murphy T.P.G. 11 with a pattern which checks EVERYTHING rather than a cheaper unit which gives an over-simplified pattern with many deficiencies. The Murphy is cheaper in the end—and a lot more satisfactory

★ *In one large firm of Television Service Engineers, the introduction of the Murphy T.P.G. 11 enabled the time taken on diagnosis repair and re-alignment to be cut by half !*

THERE IS NO SUBSTITUTE FOR THE
MURPHY TV
PATTERN GENERATOR
(TPG II)

F. LIVINGSTON HOGG

SPECIALIST IN HIGH-GRADE INSTRUMENTS FOR THE COMMUNICATIONS INDUSTRY

65 BARNSBURY STREET, LONDON, N.1.

For further details and appointments for demonstrations ***Telephone TUDor 5277***

Widney Telescopic Mountings

PRODUCED IN 3 SIZES



Telescopic Mountings offer the most convenient means of obtaining complete accessibility of rack mounted equipment, as each chassis can be withdrawn completely clear of its framework for easy examination.

WRITE FOR ILLUSTRATED CATALOGUE DEPT. A.

Technical & Sales Agent
C. H. DAVIS
59, Brompton Road, LONDON, S.W.3
Phone: KENSINGTON 4201

A Widney PRODUCT — USED ALL OVER THE WORLD — ESTABLISHED 1890

MANUFACTURERS
HALLAM SLEIGH & CHESTON LTD
WIDNEY WORKS · BIRMINGHAM · 4
Phone: Aston Cross 0914 (4 lines) * Grams: Superfine, Birmingham 4

★

Antenna Theory and Design

By H. Paul Williams, Ph.D., A.M.I.E.E., Sen. M.I.R.E. This important two-volume work gives a complete account of the theoretical basis of antenna design followed by comprehensive guidance on the practical aspects of this work. Both volumes are profusely illustrated.

Vol. I
FOUNDATIONS OF ANTENNA THEORY
142 pages. 21/- net.

Vol. II
THE ELECTRICAL DESIGN OF ANTENNÆ
522 pages. 63/- net.

Pitman
Parker Street, Kingsway, London, W.C.2

LUMINESCENT MATERIALS

FLUORESCENT POWDERS for ELECTRIC DISCHARGE LAMPS
ZINC and CADMIUM SULPHIDE TYPE MATERIALS
RADIOACTIVE LUMINOUS COMPOUND

★ ★ ★

CATHODE RAY TUBE PHOSPHORS
X-RAY POWDERS and SCREENS
LONG AFTERGLOW PHOSPHORS

We also invite enquiries for any other luminescent materials to meet special requirements.

★ ★ ★

DERBY & COMPANY LTD.

Offices:
62-3 Cheapside, London, E.C.2.
Telephone: CITY 2633
Telegrams: PLATIVET, London

Works:
Millmarsh Lane, Brimsdown, Middx. HOWard 2208

PLAN YOUR CAREER

RADIO - TELEVISION and other INDUSTRIAL ELECTRONIC subjects

HOME STUDY COURSES

- ADVANCED RADIO
- INDUSTRIAL ELECTRONICS
- TELEVISION
- HIGHER MATHEMATICS
- PHYSICS

Obtain a copy of Free Booklet giving full details of these and Daytime Attendance Courses.

Write to Dept: 11

E.M.I. INSTITUTES
10 PEMBRIDGE SQUARE, NOTTING HILL GATE, LONDON, W.2
Telephone: BAYswater 5131/2.

Associated with "H.M.V." MARCONIPHONE COLUMBIA ETC

E. 166E

5 SOLON MODELS

SOLON electric soldering irons have proved their capacity for continuous service under the most exacting conditions. 5 models; 240 watt oval tapered bit; 125 watt oval tapered and round pencil bits and 65 watt oval tapered and round pencil bits. Each model complete with 6 feet of Henley 3-core flexible. Now available from stock. Write for folder Y.10.

W. T. HENLEY'S TELEGRAPH WORKS CO. LTD.
51-53 Hatton Garden, London, E.C.1

HENLEY SOLON ELECTRIC SOLDERING IRONS

+SECOND EDITION NOW OUT! 248 PAGES!

SOUND REPRODUCTION
by G. A. Briggs



REVISED AND ENLARGED, WITH 10 NEW CHAPTERS AND 193 ILLUSTRATIONS, INCLUDING 75 ENTIRELY NEW DIAGRAMS

Greatly enlarged, this fascinating work contains all the principal features from the first edition, additional pages on Cabinet Design, Disc Recording, Needles and Grooves, Pick-ups and Microgrooves and new chapters on the following :—

EXPONENTIAL HORNS AND MULTIPLE SPEAKERS - CABINET LINING - QUESTIONS AND ANSWERS - AIR LOADING - CROSS-OVER NETWORKS - DIRECTIONAL EFFECTS - MAGNETIC RECORDING RIBBON SPEAKERS - NEEDLE INSPECTION - SAPPHIRE, TUNGSTEN AND DIAMOND

OBTAINABLE FROM RADIO DEALERS, BOOKSELLERS OR DIRECT FROM THE PUBLISHERS

BOUND FULL REXINE 10/6 (11/- POST FREE)

LOUDSPEAKERS
by G. A. Briggs
3rd Edtn. (4th impression)
NOW READY!
The Why and How of Good Reproduction
88 PAGES
36 ILLUSTRATIONS
5/- (5/3 Post Free)

Enjoyment of these books is enhanced by the occasional flashes of humour now expected of Mr. Briggs.

Wharfedale WIRELESS WORKS,
BRADFORD ROAD, IDLE, BRADFORD, YORKS.
Telephone : Idle 461 Telegrams : "Wharfdel, Idle, Bradford.

THE
BRITISH NATIONAL RADIO SCHOOL
ESTD. 1940

Now in our eleventh year and still—

NO B.N.R.S. STUDENT HAS EVER FAILED

to pass his examination(s) after completing our appropriate study course. Nothing succeeds like SUCCESS and what we have done already for so many of your colleagues, we can do again for YOU.

All our courses are conducted by correspondence, on INDIVIDUAL lines and our Syllabus includes:

A.M.I.E.E. (in approved cases); M.Brit.I.R.E.; City and Guilds, Radio Telecommunications, Mathematics: P.M.G. (theory only) examination courses; also what we believe to be the finest RADAR course available anywhere.

Free Booklet from

STUDIES DIRECTOR
BRITISH NATIONAL RADIO SCHOOL
66 ADDISCOMBE ROAD, CROYDON
Phone Addiscombe 3341

A NEW B.P.L. INSTRUMENT

THE VOLTASCOPE—A combined valve-voltmeter and oscilloscope. VALVE-VOLTMETER — Infinite Input Resistance for D.C. ranges 0 to 300 volts. A.C. ranges 0 to 150 volts in 5 ranges. 3½-inch scale meter. OSCILLOSCOPE—3-inch screen tube provided with balanced amplifiers for Y and X plates giving a 5 times trace expansion. Maximum sensitivity 150mV/cm. Response from D.C. to 100 Kc/s.

Limited quantity available for early delivery.

BRITISH PHYSICAL LABORATORIES
HOUSEBOAT WORKS, RADLETT, HERTS.
Tel: Radlett 5674-5-6

THIS IS REOSOUND REG. TRADE MARK



RACK MOUNTING CABINET

FOR 19in. PANEL

CABINET to accommodate one 19″ × 10½″ × 14G. Steel Rack Panel with 17″ × 12″ × 2½″ Chassis and Angle Brackets in 18G. Steel; Panel secured by four Chromium Plated Screws Approximate overall dimensions 21″ × 12½″ × 11½″ high, Louvred on Back, having radiused front corners and Rubber Feet. **£3.15.**

Two Carrying Handles Extra **6s.**

Recessed Lid 14″ × 8″ in top Extra **10s.**

Finishes: Black, Grey or Brown Wrinkle Enamel.

Carriage: Paid to towns in the United Kingdom.

Illustrated Lists and Trade Terms on Application.

REOSOUND ENGINEERING & ELECTRICAL COMPANY, "REOSOUND WORKS", COLESHILL RD., SUTTON COLDFIELD

Tel.: SUT. 4685. Grams.: REOSOUND, SUTTON COLDFIELD

Scophony BAIRD

TRANSFORMERS & CHOKES

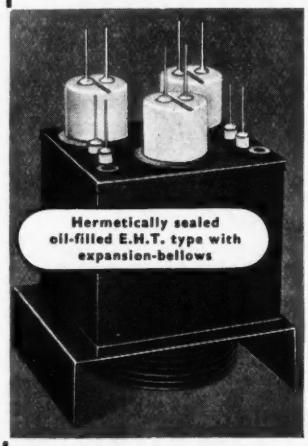

designed and manufactured to suit your specific needs

HERMETICALLY SEALED TYPES —up to 1KVA.

DOUBLE- and AUTO-WOUND OIL/AIR COOLED TYPES —up to 50KVA. (Single or 3-phase)

Send your next enquiry to:—

SCOPHONY-BAIRD LTD., (Division 6), WELLS SOMERSET

Telephone: WELLS 2081-5

AMBITIOUS ENGINEERS

IMPORTANT GUIDE TO SUCCESSFUL ENGINEERING CAREERS

After months of intensive effort, we are pleased to announce that the new edition of our 176-page Handbook, **"ENGINEERING OPORTUNITIES,"** is now ready for free distribution.

This book is, beyond argument, the finest and most complete Handbook on Successful Electrical Engineering Careers ever compiled. It should be on the bookshelf of every person interested in any phase of Electrical Engineering, whatever his age, position or experience.

This book shows, among other intensely interesting matter, the easiest way of passing **B.Sc., A.M. Brit. I.R.E., CITY AND GUILDS, G.P.O.,** and every other important technical examination, whilst details are given of over 200 Courses in all branches of Engineering. The Electrical Group of Courses includes: **Neon Lighting, Power House Design, Radio, Television, Alternating Current, Sound Film Projection, Mains Engineering, Measuring Instruments, Electrical Design, Electricity Supply, Electronic Engineering, General Electrical Engineering, Electrical Installations.**

The Handbook also explains the unique advantages of our Employment Dept.

We Guarantee "NO PASS—NO FEE"

If you wish to become Technically Qualified you cannot afford to miss reading **"ENGINEERING OPPORTUNITIES."** In your own interests send for your copy of this enlightening guide to well-paid posts **NOW—FREE** and post-free. Do not neglect this opportunity of investigating the possibilities within your reach.

BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY
337B, Shakespeare House,
17–19 Stratford Place, Oxford St.,
London, W.1

BIET

Bouquet for Savage Transformers

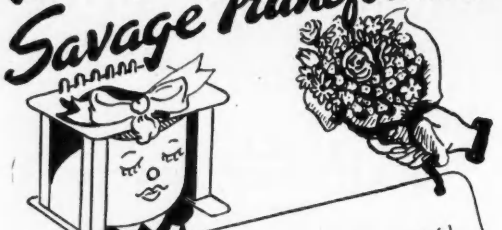

"... This is just to thank you very much indeed for the wonderful service which you gave us over the transformer for which we were very much pressed. We feel you must have started the manufacture of this transformer immediately after our telephone conversation, and for this we are most grateful, as it has got us out of a difficult situation.

A. Ltd., Middlesex

TRANSFORMERS SAVAGE OF DEVIZES LIMITED

SAVAGE TRANSFORMERS LTD. NURSTEED ROAD, DEVIZES, WILTS.

Telephone: Devizes 536

Instruments for Research and Industry

The
MICOVAC
ELECTRONIC TESTMETER

A self-contained battery operated versatile valve voltmeter designed for laboratory and portable use. Accessories include a V.H.F. probe, a 5,000 volt d.c. multiplier and a handy carrying case.

The 22 ranges cover:—

VOLTS 1 to 500 volts on d.c., a.c. and r.f.

CURRENT 10 microamps to 1.5 Amps on d.c.

RESISTANCE 0 - 10 and 0 - 100 Megohms.

★ *The accuracy on all ranges is within ± 3%*

ELECTRONIC INSTRUMENTS LTD
17, PARADISE ROAD · RICHMOND · SURREY · ENGLAND

HIGH VOLTAGE SUPPLIES

Model S4/50 Breakdown Tester

- Continuously variable 2–30 KV
- Positive or Negative output
- Available stabilised or unstabilised for breakdown testing
- Input A.C. 115–250 volts, 40-100 cycles

A complete range of Radio Frequency high voltage equipment is available from 2 to 50 KV at 1 mA

HAZLEHURST DESIGNS LTD.,
34a, Pottery Lane, London, W.11.
PARk 6955

TOLEDO

DARWINS
for
PERMANENT MAGNETS
of
EVERY DESCRIPTION

For Loud Speakers, Clocks, Relays, Meters, Magnetrons, Separators, etc.

Specialist manufactured for specialised industries. Cast or forged. Produced in all the latest types of Magnetic Materials. Complete with pole pieces if desired.

DARWINS LTD • TINSLEY • SHEFFIELD

D.10

Only with CO-AX R.F. CABLES

AIR-SPACED ARTICULATED **4mmf/ft**

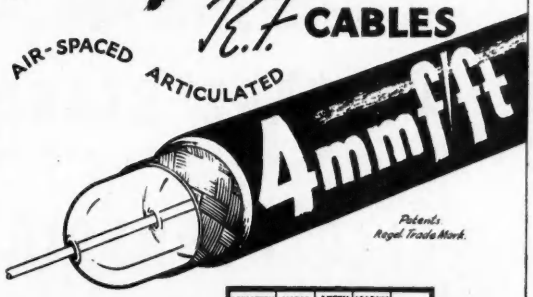

Patents Regd. Trade Mark.

THE LOWEST EVER CAPACITANCE OR ATTENUATION

IMMEDIATE DELIVERIES

SPECIALISTS IN AIR-SPACED ARTICULATED CABLES SINCE 1929

TRANSRADIO LTD.
CONTRACTORS TO H.M. GOVERNMENT
138A CROMWELL ROAD, LONDON SW7
ENGLAND

LOW ATTEN. TYPES.	IMPED. OHMS	ATTEN. db/100ft at 100 Mc/s.	LOADING Av. at 100 Mc/s.	Q.D.*	
A 1	74	1.7	0.11	0.36	HIGH POWER FLEXIBLE
A 2	74	1.3	0.24	0.44	
A34	73	0.6	1.5	0.88	
LOW CAPAC. TYPES.	**CAPAC. mmf/ft**	**IMPED. OHMS.**	**ATTEN. db/100ft. 100 Mc/s.**	**Q.D.***	
C 1	7.3	150	2.5	0.36	PHOTOCELL CABLE
P.C.1	10.2	132	3.1	0.36	
C 11	6.3	173	3.2	0.36	
C 2	6.3	171	2.15	0.44	
C22	5.5	184	2.8	0.44	
C 3	5.4	197	1.9	0.64	
C33	4.8	220	2.4	0.64	VERY LOW CAPACITANCE
C44	4.1	252	2.1	1.03	

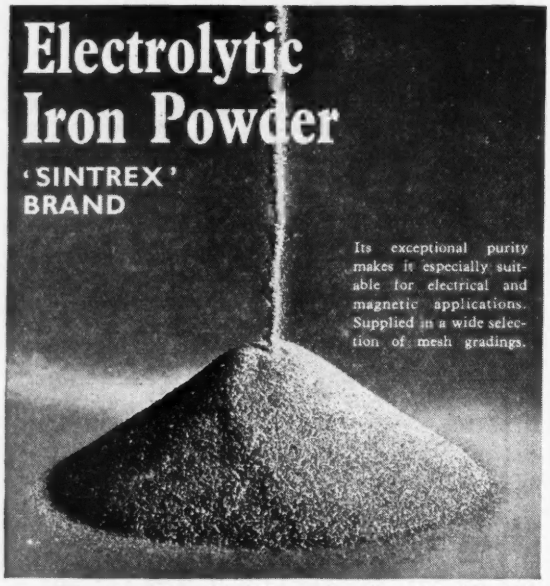
Electrolytic
Iron Powder
'SINTREX'
BRAND
Its exceptional purity makes it especially suitable for electrical and magnetic applications. Supplied in a wide selection of mesh gradings.

GEORGE COHEN
SONS & CO. LTD

BROADWAY CHAMBERS THE 600 GROUP LONDON - - - W.6
TELEPHONE: RIVERSIDE 4141

EE/501/IP20

WODEN TRANSFORMER CO. LTD

COMPOUND FILLED

TRANSFORMERS & CHOKES

for

UTMOST RELIABILITY



Woden Compound Filled transformers have been developed for use in exacting industrial and climatic conditions and have the following features :—

- *Complete moisture-proof filling compound*
- *Universal fixing for above or below chassis wiring*
- *Constant fixing centres and overall size*
- *Occupy minimum space and ensure clean and compact layout*

Send for latest catalogue

WODEN TRANSFORMER CO, LTD.,
MOXLEY ROAD, BILSTON, STAFFS.

J.T.L.

To be published shortly :—

The first two books of the new "Electronic Engineering" monographs

1 VOLTAGE STABILIZERS

By F. A. Benson, M.Eng., A.M.I.E.E., M.I.R.E.
(University of Sheffield) Price 12/6

2 ELECTROPHYSIOLOGICAL TECHNIQUE

By C. J. Dickinson, B.A., B.Sc.
(Magdalen College, Oxford) Price 12/6

To be followed at intervals by other monographs on the latest techniques and applications in the ever-widening field of electronics

Obtainable from all Booksellers or from :—

Electronic Engineering

28 ESSEX STREET, STRAND, LONDON, W.C.2.

Sintered Permanent Magnets

ALNICO · ALCOMAX · HYCOMAX

This Photo Electric Exposure Meter made by The Pullin Optical Co. Ltd. incorporates an Alcomax II Sintered Magnet. Where small complex shapes with high magnetic efficiency and stability are required sintered permanent magnets are essential.

ACTUAL SIZE OF MAGNET

MUREX LTD. RAINHAM · ESSEX · ENGLAND
Telephone: Rainham, Essex 240
LONDON SALES OFFICE
CENTRAL HOUSE · UPPER WOBURN PLACE · W.C.1 · Telephone: EUSton 8265

We also supply
TUNGSTEN
MOLYBDENUM
TANTALUM
ROD · WIRE · SHEET · STRIP



MAGNETIC RELAYS

LARGEST STOCK IN GREAT BRITAIN OF RELAYS, KEY SWITCHES AND UNISELECTORS

Government Contractors

RELAYS P.O. 3000 – 600 – HIGH SPEED
ALL NEW EX-MINISTRY GOODS

JACK DAVIS DEPT. E.E.
30 PERCY STREET, LONDON, W.1.
Phones: MUSeum 7960 LANgham 4821

LAMALAC INSULATION

SYNTHETIC RESIN LAMINATED MATERIALS
SHEET, ROD AND TUBE IN ALL DIMENSIONS
BOBBINS & COIL FORMERS TO ANY SPECIFICATION
MICA AND MICANITE SHEET AND MANUFACTURED PARTS

MICA & MICANITE SUPPLIES LTD.,
BARNSBURY SQUARE, LONDON, N.1.
Telephone: NORth 3032/5 Telegrams: MICASULIM – LONDON



MICA

DISCS
DIAPHRAGMS
ELEMENT STRIPS
CONDENSER PLATES
SPECIAL SHAPES
RAW MICA
WASHERS
Etc

BRITISH MICA Co LTD – BEDFORD.

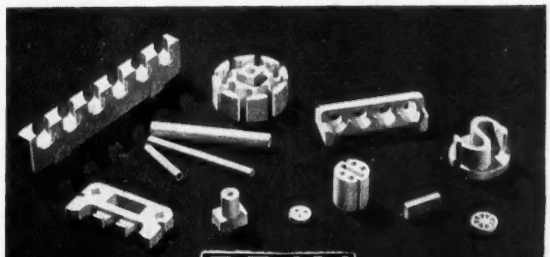

BRAY

ELECTRO-CERAMIC INSULATORS & REFRACTORIES
for the
TELECOMMUNICATION, RADIO & ELECTRICAL TRADES
Manufactured by
GEO. BRAY & CO. LTD.
LEEDS 2 ENGLAND

Varley
REGD. TRADE MARK

COMPONENTS
FOR
ELECTRONIC ENGINEERING HOME BUILT TELEVISOR

List No.

WS 903/4 4KV - 2V (2A) 4V (1A)	67/6
or	
WS 903/5 5 KV - 2 V (2A) - 4 V (1A)	72/6
EP 63 Mains Transformer ...	90/-
DP 52 Choke...	26/-
DP 62 Choke...	17/-

OLIVER PELL CONTROL LTD
CAMBRIDGE ROW BURRAGE ROAD, S.E. 18.
Telephone Woolwich 1422

Laboratory Research Workers & Technicians

A. F. JEFFREE, LTD., ARE NOW ABLE TO OFFER DIRECT COUPLED AMPLIFIERS, SUITABLE FOR USE IN ALL FIELDS OF SCIENTIFIC APPLICATIONS. CARDIOGRAPHY, ENCEPHALOGRAPHS. WIRE STRAIN GAUGES, WIDE BAND AMPLIFIERS, BIOLOGICAL USE, PHOTOMETRY, SPECTRO PHOTOMETRY, NUCLEAR PHYSICS, PULSE CIRCUIT, AND NUL INDICATORS, ETC.

FEATURES

Input circuit noise not measurable. Zero Frequency to Megacycles. Inputs : 1, 2, 4, 6, or 8. All electronically mixed to suit any impedance required. True balanced phase splitters. Normal unstabilised power pack. Zero drift over whole amplifier. Not affected by extremes of temperature Gains from 50 to 100,000

Enquiries are invited, write to :

A. F. JEFFREE, LTD.
8, DOVERS GREEN RD., REIGATE,
SURREY, ENGLAND

EXCELLENT VALUE!

OHMMETERS. Bench type for high-speed production, six ranges 0-100 to 0-10 megs. fitted 8-in. meter for quick and accurate reading. Range selected by push button. 200/250V 40/100 cycles, **£20.** Write for descriptive leaflet.

VARIACS. Consisting of two units in series, input 230V output 115/230V 1.5 kVA, **£9.** Other sizes in stock.

GALVOS. Tinsley 500 ohm moving-coil mirror reflecting. 7 mm/microamps with lamp and scale fitted in polished wood box, for A.C. mains, **£8 10s.**

SPEAKERS. Vitavox H.F. Speaker Units as new, **40/-.** Horn for same, 3 ft. long with flare 2 ft. 8 in. by 1 ft. 4 in., **30/-.**, carr. extra. Square mouth speaker horns, 21 in., **21/-.** Bell-mouth horns, **25/-.**

Resistances. Variable wire wound, by leading makers, 4.6 ohm 16 amp. twin slider with gear wheel, **35/-**, 20 ohms 2.5 amp. single, **15/-**, 5 ohms 10 amps. single, **21/-**. 300 ohms ½ amp., **12/6**, 1.2 ohm 15 amp., **10/-**, 152 ohms 2 amp. double slider, **30/-**. All in new condition.

DIMMERS, enclosed slider type, 500W, **40/-**, 1,000W, **70/-**, 5kW, **£7 10s.** Special 5 kW on mobile stand **£8 10s.**
Signal Generators, Oscilloscopes. Frequency Meters, Transformers, Rotaries, Magnets.

LESLIE DIXON & CO.,
214, Queenstown Road, Battersea, London, S.W.8
'Phone : MACaulay 2159


Midget Relay ML/C

RELAYS
For A.C. and D.C.
Multiple-contact heavy duty Relays. Sensitive Relays, measuring and impulse Relays, mercury switch Relays, time delay Relays, photo-electric Relays.
Ask for Leaflets RE/EO

LONDEX LTD.
Manufacturers of Relays
207, ANERLEY ROAD, LONDON, S.E.20
SYDenham 6258

SERVO CONTROL EQUIPMENT

MAGSLIPS
Resolvers, Transmitters, Hunters, Receivers, etc., 2" and 3" types.

SELSYNS
Power and Phase-Shifting types.

INDUCTION MOTORS AND VELODYNES
Send for list and technical details.

Vacuum relays 6 volt 35mA. (approx.) fitted 4-pin valve socket (Brit.) 6/6

HOPTON RADIO,
1, Hopton Parade, Streatham High Road, LONDON, S.W.16.
'phone : STReatham 6165

Partridge News

To your exact Specification
5 VA to 50 KVA

TRANSFORMERS—
POWER or AUDIO FREQUENCY
4 WEEKS DELIVERY

The acknowledged precision of Partridge transformers is available to you in transformers and chokes to your own specification . . . and in double quick time. Whatever your transformer need, first consult Partridge— the specialists.

★ *Note: All Partridge components are now available HERMETICALLY SEALED IN OIL*

PARTRIDGE
TRANSFORMERS LTD
ROEBUCK ROAD · KINGSTON - BY - PASS
TOLWORTH SURREY
Telephone *ELMbridge 6737-8*

'Radiospares' Quality Parts
THE SERVICE ENGINEER'S FIRST CHOICE

NOW AVAILABLE—
THE NEW 1" SQUARE
"Q-MAX" CHASSIS PUNCH
PRICE 19/6 (KEY 1/-)
BERRY'S
(SHORT WAVE) LTD.
25, HIGH HOLBORN, W.C.1

Electronic ACCESSORIES & COMPONENTS
HH
For Research Depts., Laboratories, Colleges, etc. *Send for List.*
HOLIDAY & HEMMERDINGER LTD
74-78, HARDMAN ST., DEANSGATE
MANCHESTER 3 TEL. DEA. 4121/2

B9

An essential component unique in this country



Seamless, one-piece, metal bellows combining the properties of a compression spring capable of repeated flexing, a packless gland, and a container which can be hermetically sealed. Hydraulically formed by a process unique in this country, they are tough, resilient, with a uniformity of life, performance and reliability unobtainable by any other method.

FOR: Automatic coolant regulation. Movement for pressure change. Packless gland to seal spindle in high vacua. Reservoir to accept liquid expansion. Dashpot or delay device. Barometric measurement or control. Pressurised couplings where vibration or movement is present. Dust seal to prevent ingress of dirt. Pressure reducing valves. Hydraulic transmission. Distance thermostatic control. Low torque flexible coupling. Pressure sealed rocking movement. Pressurised rotating shaft seals. Aircraft pressurised cabin control. Refrigeration expansion valves. Thermostatic Steam Traps. Pressure amplifiers. Differential pressure measurements. Thermostatic operation of louvre or damper.

Write for List No. V 800-1.

Drayton 'Hydroflex' METAL BELLOWS

Drayton Regulator & Instrument Co. Ltd., West Drayton, Mdx. • W. Drayton 2611

The "ALL METAL WAY" 6d per copy post free

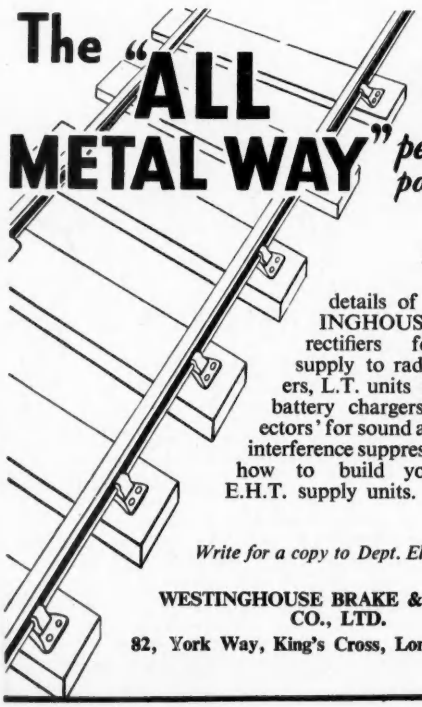

for

details of 'WESTINGHOUSE' metal rectifiers for H.T. supply to radio receivers, L.T. units for small battery chargers, 'Westectors' for sound and vision interference suppression, and how to build your own E.H.T. supply units.

Write for a copy to Dept. Elec. E.7

WESTINGHOUSE BRAKE & SIGNAL CO., LTD.
82, York Way, King's Cross, London, N.1.

POTENTIOMETERS by RELIANCE



Wire-wound and Composition types. Single, Ganged, Tandem Units.

Characteristics: linear, log., semi-log., non-inductive, etc. Full details on request.

RELIANCE MNFG. CO. (SOUTHWARK), LTD.,
Sutherland Road, Higham Hill, Walthamstow, E.17.
Telephone: Larkswood 3245

SURPLUS VALVES GUARANTEED

6L6.	8/6.	HP4106.	6/3.	6K8.	5/6.	807.	5/6.
EL33.	8/6.	38.	6/3.	EF39.	5/6.	IS4.	5/6.
6C6.	6/3.	6D6.	6/3.	IT4.	5/6.	HP4101.	5/6.
12A6.	6/3.	EF50.	6/6.	5Z4.	4/9.	6SK7.	5/-.
12C8.	6/3.	KT44.	5/6.	6K7.	4/9.	5UG4.	5/-.
41	6/3.	6N7.	5/9.	6J7.	4/9.	6F6G.	5/-.
OZ4.	6/3.	6Q7.	5/6.	6X5.	4/9.	AC6/PEN.	4/6.
6V6.	4/9.	KTW61.	4/9.	EBC33.	4/9.	VT61A.	4/9.
GZY5.	4/-.	VR136.	4/-.	VR137.	4/-.	EK32.	4/-.
VU111.	4/6.	6J5.	4/6.	SP13.	8/6.	KT30.	6/6.
SP13A.	4/6.	EA50.	3/-.	Y63.	6/3.	18.	6/3.
VU39.	6/3.	U18.	6/3.	H63.	6/3.	FW4/500.	6/3.
43.	6/3.	5Y3G.	6/3.	6F7.	6/3.	SP61.	3/6.
SP41.	3/6.	14F6G.	4/9.	6SG7.	4/6.	HP210.	4/6.

WRITE FOR LISTS OF OVER 500 RADIO LINES

WILLIAM CARVIS,
103, NORTH STREET, LEEDS, 7

RATCHET AND REVOLUTION COUNTERS



PLEASE SEND FOR LEAFLET NO. 18/6 SHOWING FULL RANGE OF 'ALBION' PRECISION COUNTERS

MEMBERS OF THE BESTEC ORGANISATION

SOLE MAKERS AND PATENTEES:
B. & F. CARTER & CO. LTD., BOLTON, N.3.

FOR MOULDED RUBBER PARTS

Enquiries are invited from the Engineering, Electrical and Motor industries for special Moulded Parts in Synthetic and Natural Compounds.

Dainite

THE HARBORO' RUBBER CO., LTD., Market Harborough

INDEX TO ADVERTISERS

Acheson Colloids Ltd. 24
Advance Components Ltd. 29
Airmec Laboratories Ltd. 30
Automatic Coil Winder & Equipment Co., Ltd., The .. .. .. Cover i

Baldwin Instrument Co., Ltd. 32
Belling & Lee Ltd. 13
Berry's (Short Wave) Ltd. 42
Brandenberg Designs Ltd. 34
Bray & Co., Ltd., George 41
British Institute of Engineering Technology 38
British Insulated Callender's Cables Ltd. 21
British Mica Co., Ltd. 41
British National Radio School, The .. 37
British Physical Laboratories 37
British Thomson-Houston Co., Ltd. .. 7

Carter & Co., Ltd., B. & F. 43
Carvis, William 43
Chance Bros. Ltd. 23
Chapman & Hall Ltd. 295
Cinema-Television Ltd. 12
Cohen, Sons & Co., Ltd., George .. 40

Darwins Ltd. 39
Davis, Jack 41
De La Rue & Co., Ltd., Thomas .. 44
Derby & Co., Ltd. 36
Dixon & Co., Leslie 42
Drayton Regulator & Instrument Co., Ltd. 43

Edison Swan Electric Co. Ltd., The .. 20
Edwards & Co. (London) Ltd., W. .. 32
Electro Dynamic Construction Co., Ltd. 27
Electronic Instruments 39
E.M.I. Institutes Ltd. 36

Evershed & Vignoles Ltd. 11

Fielden (Electronics) Ltd. 296
Fox Ltd., P.X. 31

General Electric Co., Ltd., The .. 19
General Engineering Co. (Radcliffe), Ltd. 10

Hallam, Sleigh & Cheston Ltd. .. 36
Harboro' Rubber Co., Ltd., The .. 43
Hazlehurst Designs Ltd. 39
Henley's Telegraph Works Co., Ltd., W. T. 37
Hogg, F. Livingston 35
Holiday & Hemmerdinger Ltd. .. 42
Hopton Radio 42
Hunt Ltd., A. H. 26

Inter Electron Industries 15

Jeffree Ltd., A. F. 42
Johnson, Matthey & Co., Ltd. .. 23

Leland Instruments Ltd. .. Cover iii
Lewis & Co., Ltd., H. K. 294
Londex Ltd. 42
London Electric Wire Co. & Smiths Ltd. 29

Marconi Instruments Ltd. 30
McGraw-Hill Publishing Co., Ltd. .. 295
Metropolitan-Vickers Electrical Co., Ltd. 25
Mica & Micanite Supplies Ltd. .. 41
Modern Book Co., The 294
M.S.S. Recording Co., Ltd. 14
Muirhead & Co., Ltd. 5

Mullard Electronic Products Ltd. .. 8
Murex Ltd. 41

Nagard Ltd. 27
National Savings 28
Nife Batteries 26

Painton & Co., Ltd. .. .. 31 & 33
Partridge Transformers, Ltd. 42
Pell Control Ltd., Oliver 42
Pitman & Sons Ltd., Sir Isaac .. 36

Radiospares Ltd. 42
Reliance Mnfg. Co. (Southwark), Ltd. 43
Reosound Engineering & Electrical Co. 38

Salford Electrical Instruments Ltd. .. 22
Savage Transformers Ltd. 38
Scophony-Baird Ltd. 38
Southern Instruments Ltd. 28
Steatite & Porcelain Products Ltd. .. 18
Stern Radio Ltd. 34
Sullivan Ltd., H. W. 35
Sunvic Controls Ltd. .. .. Cover iv

Taylor & Co., Ltd., Armand 34
Taylor Tunnicliff (Refractories) Ltd. 16
Telegraph Construction & Maintenance Co., Ltd., The .. .. 24 & 33
Thomas (Richard) & Baldwins Ltd. .. 9
Transradio Ltd. 39
Tufnol Ltd. 3

Vortexion Ltd. 17

Walter Instruments Ltd. .. Cover ii
Westinghouse Brake & Signal Co., Ltd. 43
Wharfedale Wireless Works Ltd. .. 37
Woden Transformer Co., Ltd. 40

How to dress a live wire

Every circuit has its own problems. Sometimes bare wire and sleeving is the rig—at other times the completely insulated wire. DE LA RUE cater for both. Tell us the job and we'll sell you the garb. Right kind, right colours, right price!

DELAFLEX
INSULATING SLEEVINGS

This range of sleevings has high insulation, great flexibility and a fine choice of single and multiple colours to suit the most complex coding system. Internal diameters from 0.5 mm. upwards. Materials: Varnished Cotton, Varnished Art Silk (Rayon), Rolled Silk and P.V.C. with optional metal screening. The range is manufactured with the greatest regard to long service.

HAMOFIL
CONNECTING WIRES

An exceptionally attractive series of "hook-up" wires. The range includes both single and stranded conductors, and is available in single and multiple colours for coding. There is also available in this range a "push-back" type to facilitate rapid soldering without the need for "stripping". May we send you samples and price particulars of these wires and sleevings?

THOMAS
DE LA RUE
& CO. LTD.

Plastics Division, IMPERIAL HOUSE, 84/86 REGENT STREET, W.1.

'Delaflex' and 'Hamofil' are registered trade names of Thomas De La Rue & Co. Ltd.

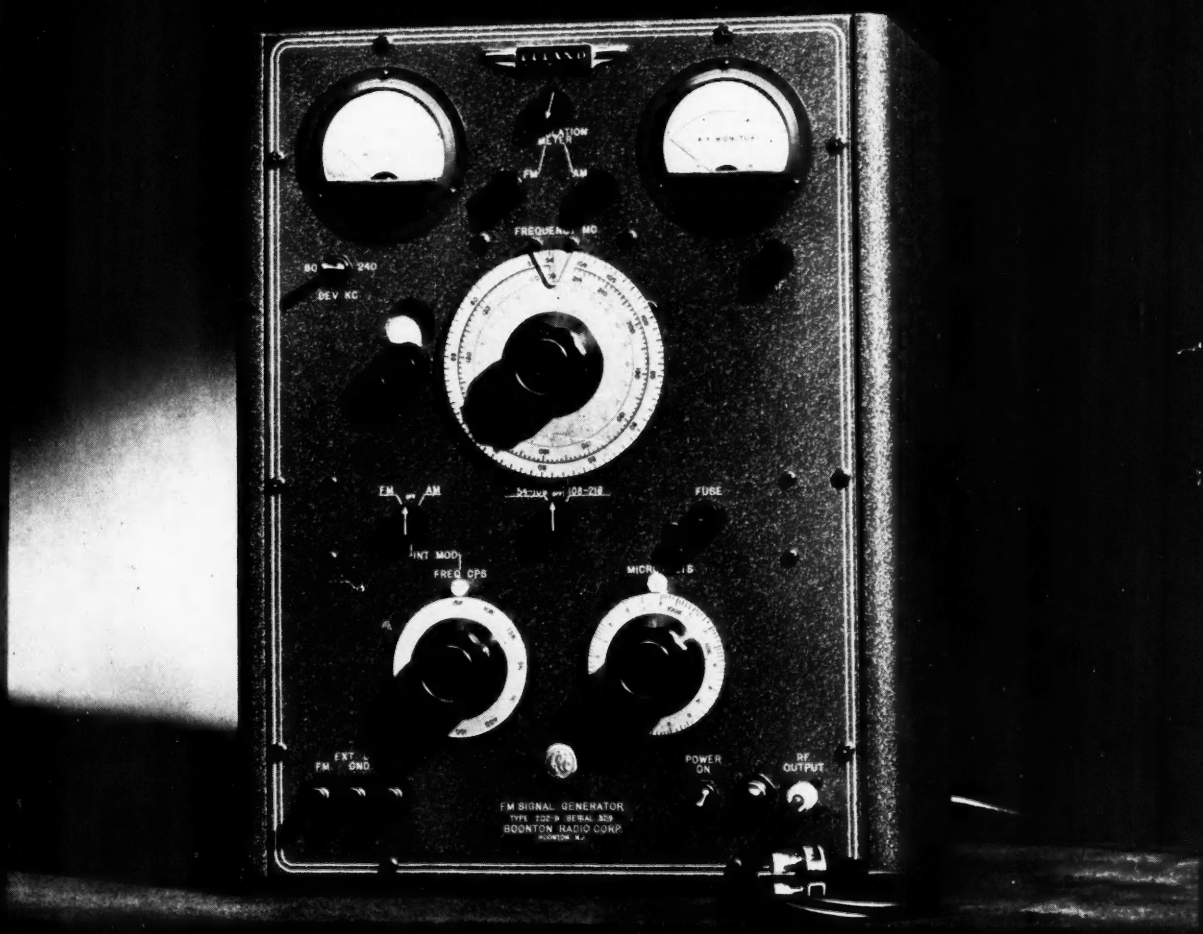

F.M. *The latest* SIGNAL GENERATOR *by* Boonton — MODEL 202-B

Developed to meet the needs of engineers engaged in the design of F.M. and television receivers for operation within the frequency range, 54 to 215 megacycles. This instrument embodies the results of ten years' experience in F.M. generators, gained in the production of the well-known Boonton 150 series.

- ★ Frequencies of 54 to 108 mc/s and 108 to 216 mc/s are covered in two ranges, directly calibrated in megacycles to ± 0.5%.
- ★ Frequency modulation (deviation) is indicated by meter, and is continuously variable from zero to 240 kc/s at audio or supersonic frequencies, from internal or external source.
- ★ Amplitude modulation is separately or simultaneously available. It is continuously variable from zero to 50%, indicated by meter. The internal A.F. oscillator provides eight fixed frequencies, from 50 cycles to 15 kc/s.
- ★ R.F. output is controlled by a piston type attenuator which provides from 0.1 microvolt up to 0.2 volts at the terminals of the output cable (impedance 26.5 ohms.).
- ★ You are invited to write for the data sheet on Model 202B which gives the instrument's full specification, and also for technical information on other instruments in the ranges of BOONTON, CLOUGH-BRENGLE, BALLANTINE, FERRIS, MERVYN and MIDGLEY-HARMER.

Boonton Instruments are available, subject to import licence, from the SOLE CONCESSIONAIRES for the United Kingdom—

LELAND INSTRUMENTS LTD.

Electronic Engineers & Consultants

TELEPHONE: CHANCERY 8765 and 8766

21 JOHN STREET • BEDFORD ROW • LONDON W.C.1

TEMPERATURE CONTROL

Accurate instruments for every laboratory and works

The LATEST SUNVIC ELECTRONIC RELAY gives ACCURACY with NO ATTENTION at LOW COST



Invaluable for the reliable operation of Toluene Regulators or Contact Thermometers over long periods.

Sensitivity. Operates on a few micro watts.

Capacity. Will control 2kW at 200/250 volts A.C.

Compactness. Only $6\frac{1}{4}'' \times 2\frac{3}{4}'' \times 4\frac{1}{4}''$. Weight $3\frac{3}{4}$ lbs.

Economy. Type EA.3. (for non-inductive loads). **£6 5s. 0d.**

Hotwire Vacuum Relays · Glass-Sealed and Adjustable Thermostats · Accurate Thermostats · Electronic Relays · Resistance Thermometers and Controllers · Energy Regulators · Time-Delay Switches · D.C. Amplifiers, etc., etc. Automatic Cold Junction Thermostats · High Voltage Change-over Switches.

Please write for appropriate Catalogue Sections.

SUNVIC CONTROLS LIMITED

SUNVIC HOUSE, 10 ESSEX STREET, STRAND, LONDON, W.C.2

Telephone: TEMple Bar 7064-8. Telegrams: Sunvic, Estrand, London.

TAS/SC. 243

Printed in Great Britain by The Press at Coombelands, Ltd., Addlestone, Surrey, for the Proprietors, Morgan Brothers (Publishers) Ltd., 28, Essex Street, Strand, W.C.2.
Registered for Transmission by Canadian Magazine Post

950

W.C.2.